

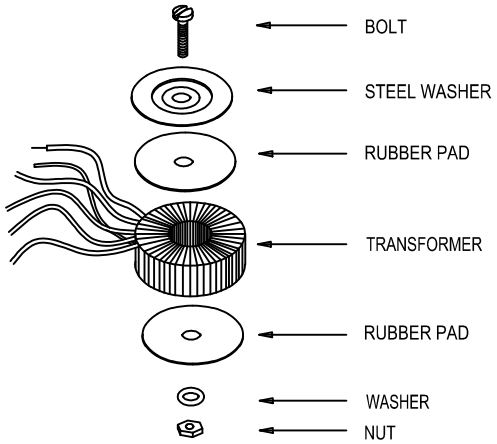


ALTERNATE MOUNTING CAN BE SUPPLIED WITH
EPOXY FILLED CENTER HOLE FOR 5/16 BOLT

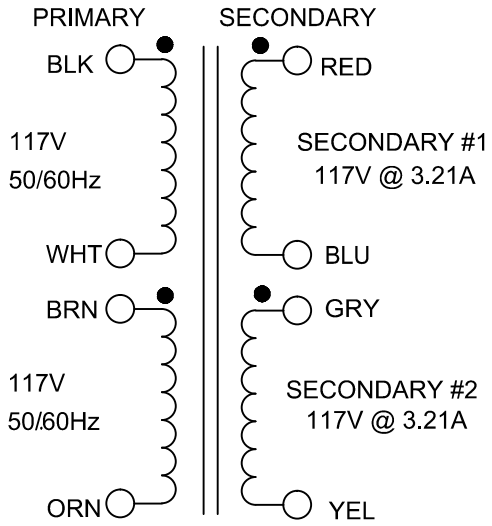

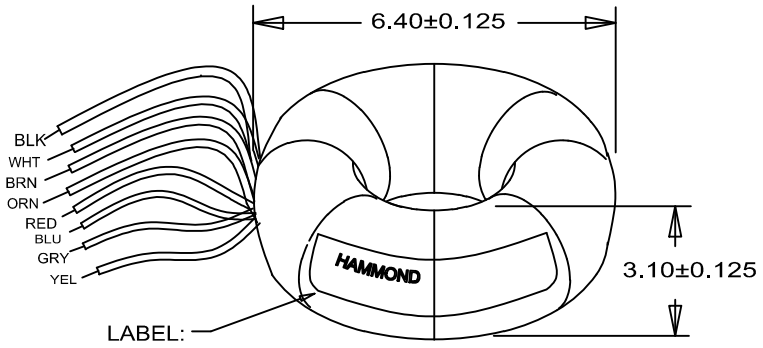

NOTE: ALL LEADS OUT 8.0" MIN. & STRIPPED .5"

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
Iex	@ 117V, 60Hz, BLK/BRN - WHT/ORG	165mA Max.
Sec. N.L.V	@ 117V, 60Hz, BLK/BRN - WHT/ORG	
	RED - BLU =	121.2V ±3%
	GRY - YEL =	121.2V ±3%
DCR	@ 20°C, WHT - BLK =	0.53 Ω ±20%
	@ 20°C, BRN - ORG =	0.53 Ω ±20%
	@ 20°C, RED - BLU =	0.48 Ω ±20%
	@ 20°C, GRY - YEL =	0.48 Ω ±20%
HIPOT	PRMARY - SECONDARY	3000V, 60Hz, 1 SEC
	PRMARY - PRIMARY	600V, 60Hz, 1 SEC
	SECONDARY - SECONDARY	600V, 60Hz, 1 SEC

PROPERTY AND COPYRIGHT NOTICE
THIS DRAWING AND THE INFORMATION IT CONVEYS ARE THE PROPERTY OF HAMMOND MANUFACTURING. IT MAY NOT BE REPRODUCED, TRANSMITTED OR USED IN ANY MANNER WHATSOEVER WITHOUT THE WRITTEN PERMISSION OF HAMMOND MANUFACTURING.

REV.#	REVISION	DATE
0	RELEASED.	09/02/2010

HAMMOND MANUFACTURING
ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

DWG. BY: C.BACIK	CHK'D BY:	TITLE: 182Q117	DWG. NO.
	APP'D. BY:	750 VA TRANSFORMER	182Q117
DATE: 09/02/2010	DIMENSIONS: IN(X) MM( )		