
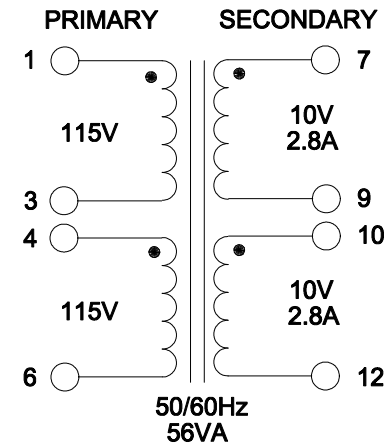


DIMENSIONS:

A	0.600" ±0.030
B	0.300" ±0.030
C	1.900" ±0.063
L	3.000" ±0.063
W	2.500" ±0.063
H	1.819" ±0.063
G	0.045" SQ. ±0.005
N	2.000" ±0.063
P	2.500" ±0.063

MOUNTING SCREW #6
WEIGHT: 1.72LBS. APPROX.

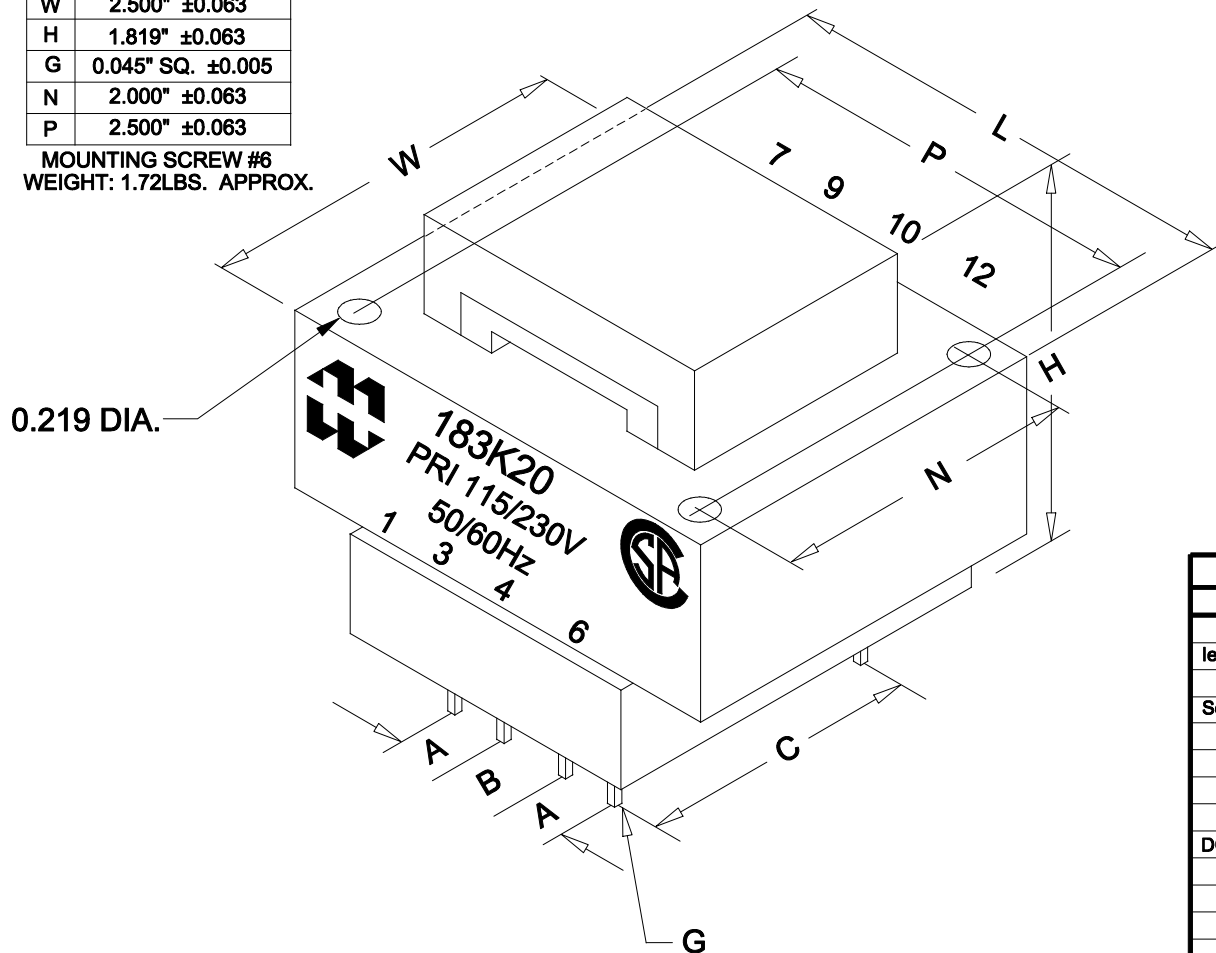

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
lex	@ 115V, 60Hz, PIN 1 - PIN 3	114mA Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 3	
	PIN 4 - PIN 6 =	115.0V ±2%
	PIN 7 - PIN 9 =	11.68V ±2%
	PIN 10 - PIN 12 =	11.86V ±2%
DCR	@ 20°C, PIN 1 - PIN 3 =	19.35 Ω ±20%
	@ 20°C, PIN 4 - PIN 6 =	23.98 Ω ±20%
	@ 20°C, PIN 7 - PIN 9 =	0.237 Ω ±20%
	@ 20°C, PIN 10 - PIN 12 =	0.291 Ω ±20%
HIPOT	PRIMARY - SECONDARY	4000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 02/15/23	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: CHASSIS MOUNT POWER TRANSFORMER	DWG. NO. 183K20
			DATE: 02/15/23	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		