


DIMENSIONS:	
A	2.375" ±0.063
B	1.300" ±0.125
C	1.433" ±0.063
D	2.000" ±0.063
E	1.659" ±0.063
F	0.200" ±0.015
G	0.187" ±0.015
H	0.406" ±0.031
J	0.950" ±0.031
K	0.360" ±0.031
L	0.290" ±0.031

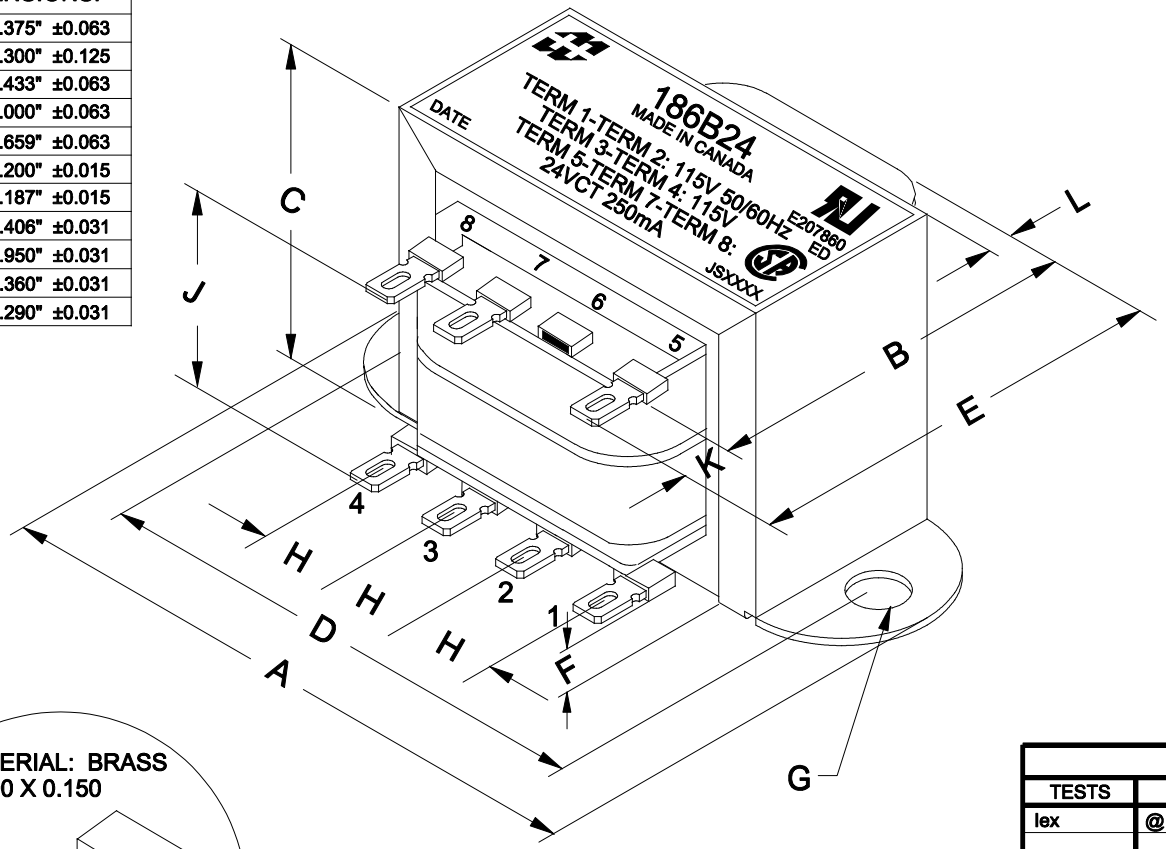



FOR 230V CONNECT PIN 2 & PIN 3 TOGETHER
INPUT PIN 1 TO PIN 4

FOR 115V CONNECT PIN 1 & PIN 3 TOGETHER
AND PIN 2 & PIN 4 TOGETHER
INPUT PIN 1 TO PIN 2

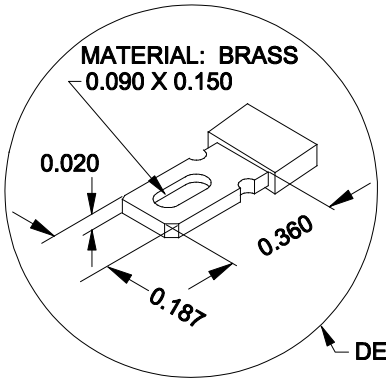

DETAILED PIN DIMENSIONS

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
Iex	@ 115V, 60Hz, TERM 1 - TERM 2	26.4mA	Max.
Sec. N.L.V	@ 115V, 60Hz, TERM 1 - TERM 2		
	TERM 3 - TERM 4 =	115.0V	±2%
	TERM 5 - TERM 8 =	29.02V	±2%
	TERM 5 - TERM 7 = TERM 7 - TERM 8 =	14.51V	±2%
DCR	@ 20°C, TERM 1 - TERM 2 =	265.9 Ω	±20%
	@ 20°C, TERM 3 - TERM 4 =	322.3 Ω	±20%
	@ 20°C, TERM 5 - TERM 8 =	9.180 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION		DATE
0	RELEASED.	C.I.	03/06/17
1	ADDED HOOK UP INFORMATION.	C.I.	10/11/17
2	ADDED MORE DIMENSIONS.	C.I.	05/21/19

HAMMOND MANUFACTURING™
ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 186B24
DATE: 03/06/17	APP'D. BY:		
	DIMENSIONS: IN(X) MM( )		