



DIMENSIONS:

A	3.250" ±0.063
B	1.730" ±0.125
C	1.995" ±0.063
D	2.813" ±0.063
E	2.089" ±0.063
G	0.187" ±0.015

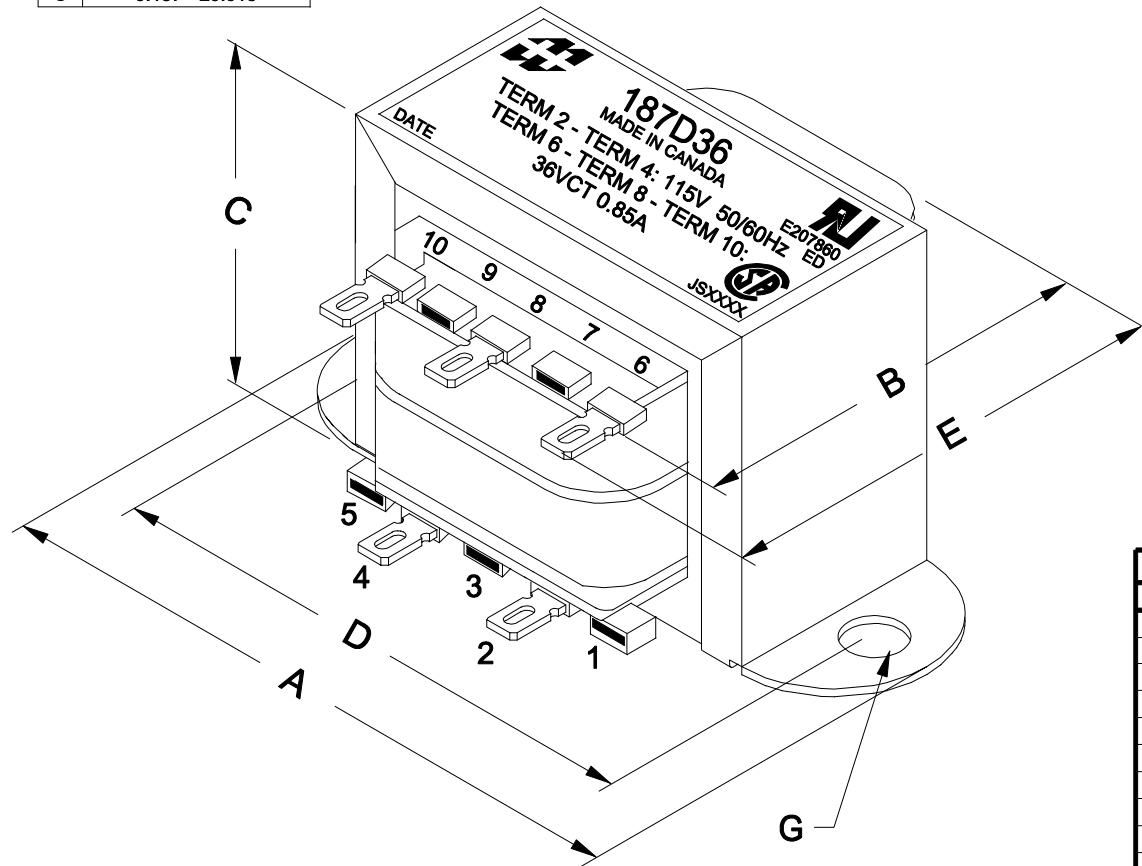

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 115V, 60Hz, TERM 2 - TERM 4	67.2mA Max.
Sec. N.L.V	@ 115V, 60Hz, TERM 2 - TERM 4	
	TERM 6 - TERM 10 =	40.16V ±2%
	TERM 6 - TERM 8 = TERM 8 - TERM 10 =	20.08V ±2%
DCR	@ 20°C, TERM 2 - TERM 4 =	17.06 Ω ±20%
	@ 20°C, TERM 6 - TERM 10 =	2.318 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 07/14/23	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 187D36
			DATE: 07/14/23	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		