
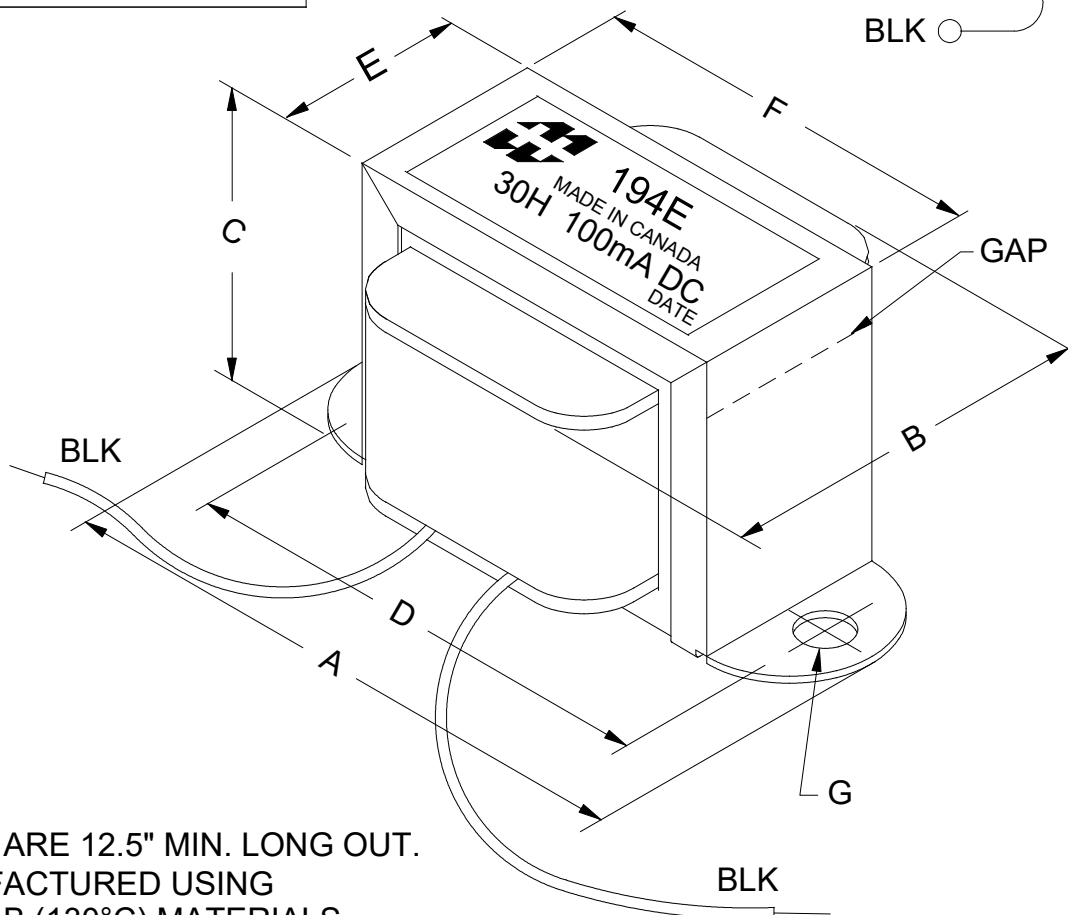


DIMENSIONS:	
A	4.000" ± 0.063
B	2.085" ± 0.125
C	2.620" ± 0.063
D	3.563" ± 0.063
E	1.076" ± 0.063
F	3.076" ± 0.063
G	0.187" ± 0.015

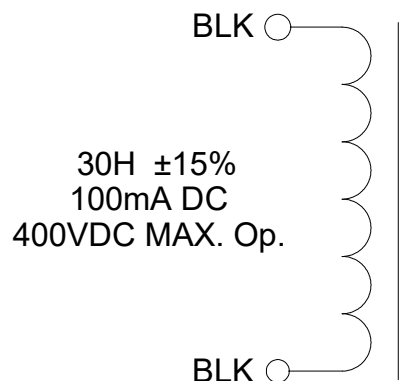

NOTE:
LEADS ARE 12.5" MIN. LONG OUT.
MANUFACTURED USING
CLASS B (130°C) MATERIALS.
RoHS COMPLIANT

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
INDUCTANCE	@ 50V, 60Hz, 100mA DC, BLK - BLK	30H $\pm 15\%$
DCR	@ 20°C, BLK - BLK =	517.2 Ω $\pm 15\%$
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC



ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

TITLE

CHOKE

NO	DATE	REVISION	DWG. BY
0	11/05/24	RELEASED. C.I.	C. ILIE
			DATE
			11/05/24
			DIM IN(X)MM()

194E