



DIMENSIONS:	
A	4.500" ± 0.063
B	5.250" ± 0.125
C	3.750" ± 0.063
D	3.750" ± 0.063
E	3.500" ± 0.063
F	4.062" ± 0.063
G	0.203" X 0.375" ± 0.015

LUG 
 30mH $\pm 15\%$
 10A DC
 600VDC MAX. Op.

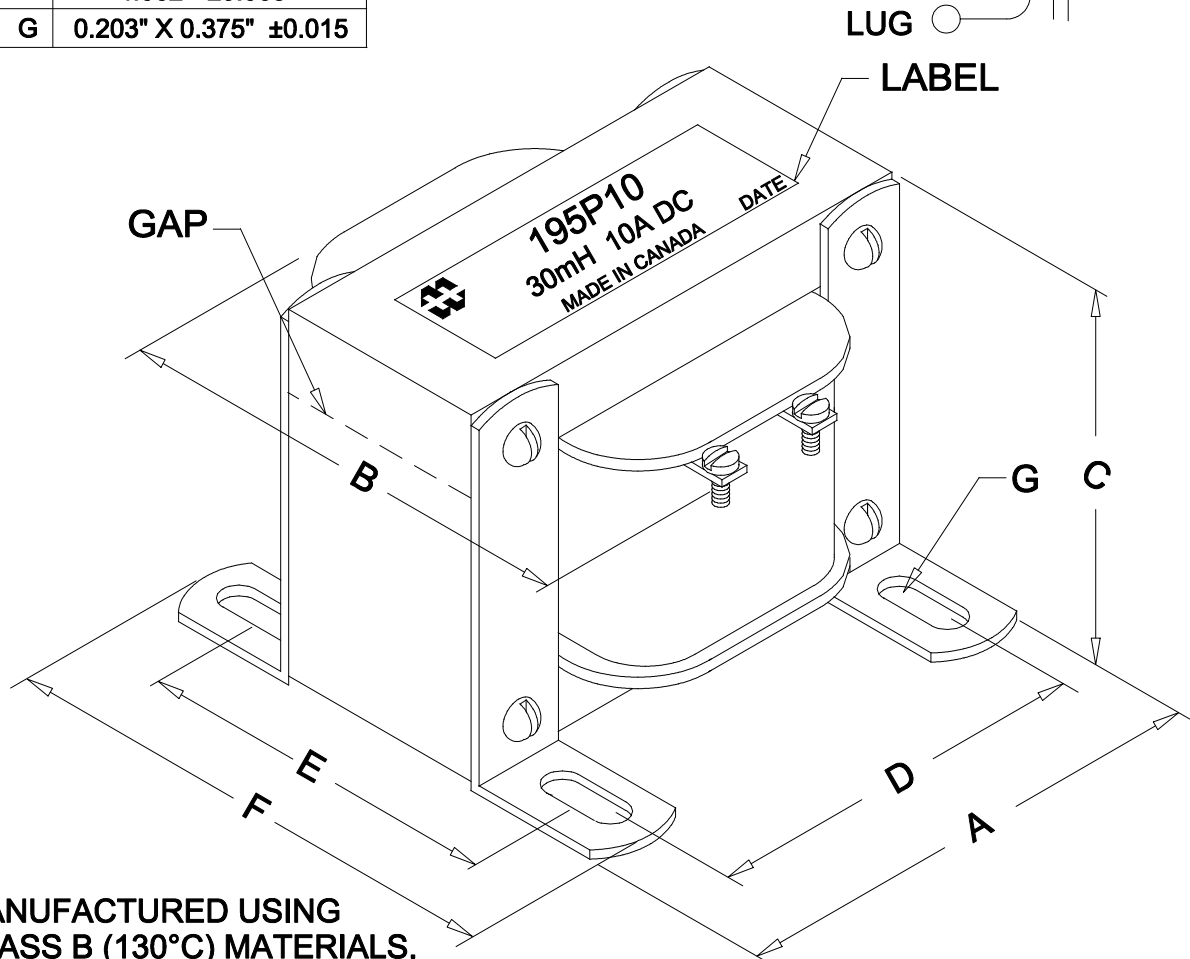

MANUFACTURED USING
 CLASS B (130°C) MATERIALS.
 RoHS COMPLIANT
 OPERATING TEMP.:
 -40°C TO 105°C
 STORAGE TEMP.:
 -40°C TO 85°C

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
INDUCTANCE	@ 5V, 60Hz, 10A DC, LUG - LUG	30mH	$\pm 15\%$
DCR	@ 20°C, LUG - LUG =	0.170 Ω	$\pm 15\%$
HIPOT	PRIMARY - CORE	2500V, 60Hz, 1 SEC	



ELECTRONIC DIVISION
 52 RANKIN PLACE,
 WATERLOO, ONTARIO, N2J 3Z5
 PH # (519) 886-6181
 FAX # (519) 886-9540

TITLE

CHOKE

NO	DATE	REVISION	DWG. BY
0	12/09/19	RELEASED. C.I.	C. ILIE
			DATE
			12/09/19
			DIM IN(X)MM()

195P10