



DIMENSIONS:	
A	2.625" ± 0.063
B	2.000" ± 0.125
C	2.208" ± 0.063
D	2.188" ± 0.063
E	1.750" ± 0.063
F	2.313" ± 0.063
G	0.188" x 0.375" ± 0.015

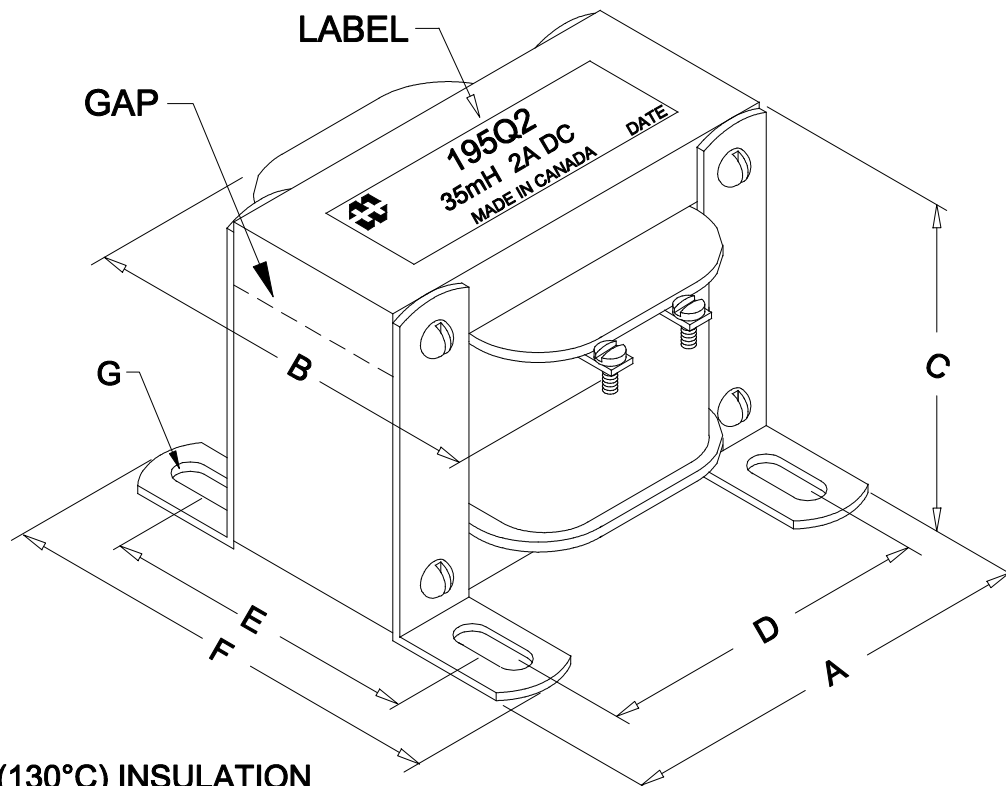

CLASS B (130°C) INSULATION
RoHS COMPLIANT

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
INDUCTANCE	@ 5V, 60Hz, 2A DC, LUG - LUG	35mH $\pm 15\%$
DCR	@ 20°C, LUG - LUG =	0.610 Ω $\pm 15\%$
HIPOT	PRMARY - SECONDARY	2500V, 60Hz, 1 SEC

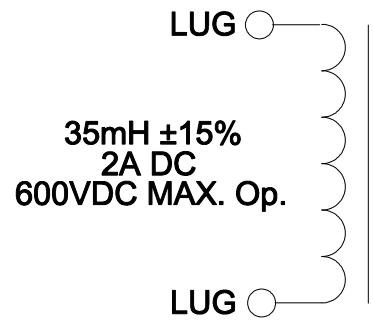

**HAMMOND
MANUFACTURING** T.M.

ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

TITLE

CHOKE

NO	DATE	REVISION	DWG. BY
0	10/22/13	RELEASED.	C.I. CORINA ILIE
			DATE
			10/22/13
			DIM IN(X)MM()

195Q2