

DIMENSIONS:	
A	3.000" ±0.063
B	2.580" ±0.125
C	2.500" ±0.063
D	2.500" ±0.063
E	2.000" ±0.063
F	2.562" ±0.063
G	0.203" X 0.375" ±0.015

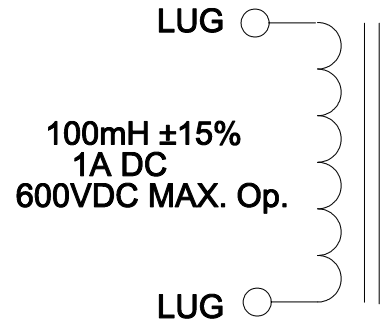

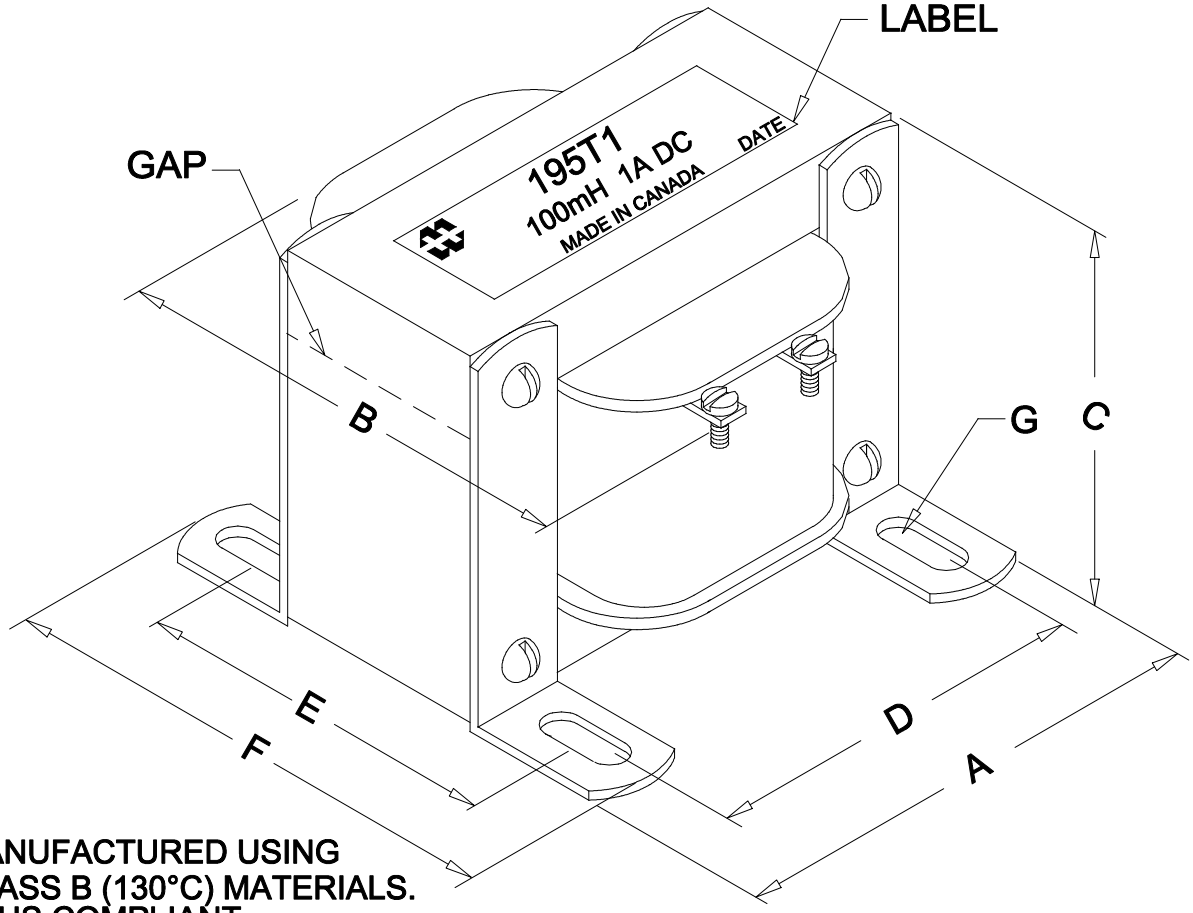

MANUFACTURED USING
CLASS B (130°C) MATERIALS.
RoHS COMPLIANT
OPERATING TEMP.:
-40°C TO 105°C
STORAGE TEMP.:
-40°C TO 85°C

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
INDUCTANCE	@ 10V, 60Hz, 1A DC, LUG - LUG	100mH ±15%
DCR	@ 20°C, LUG - LUG =	1.500 Ω ±15%
HIPOT	PRIMARY - CORE	2500V, 60Hz, 1 SEC

HAMMOND MANUFACTURING T.M.
ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

TITLE: CHOKE

NO	DATE	REVISION	
0	06/21/22	RELEASED.	C.I.

DWG. BY: C. ILIE
DATE: 06/21/22
DIM IN(X)MM( )

195T1