


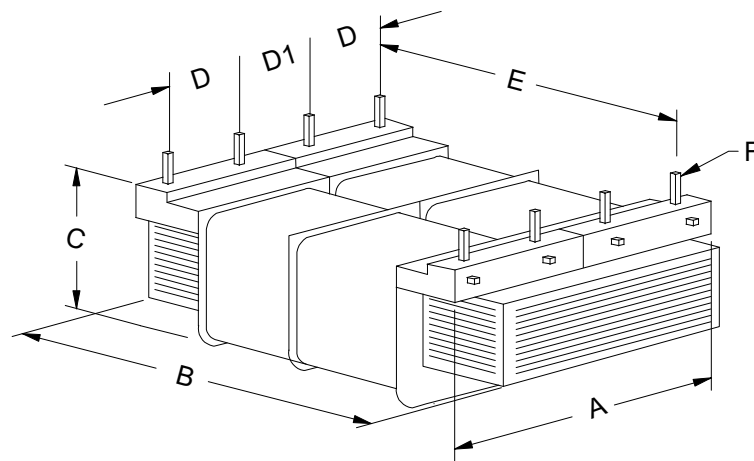


DIMENSIONS:	
A	2.250" ±0.063
B	2.875" ±0.063
C	1.250" ±0.063
D	0.600" ±0.030
D1	0.530" ±0.030
E	1.900" ±0.030
F	0.040" SQ. ±0.005
G	0.156" ±0.015
H	1.312" ±0.030
J	2.438" ±0.030

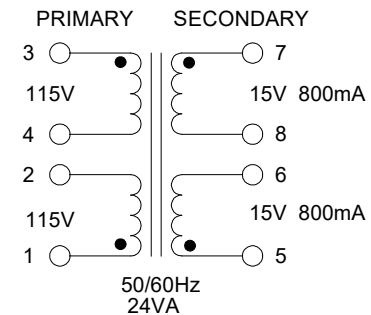

STAMPED INFORMATION
ON TOP OF THE UNIT.
(BLACK INK)

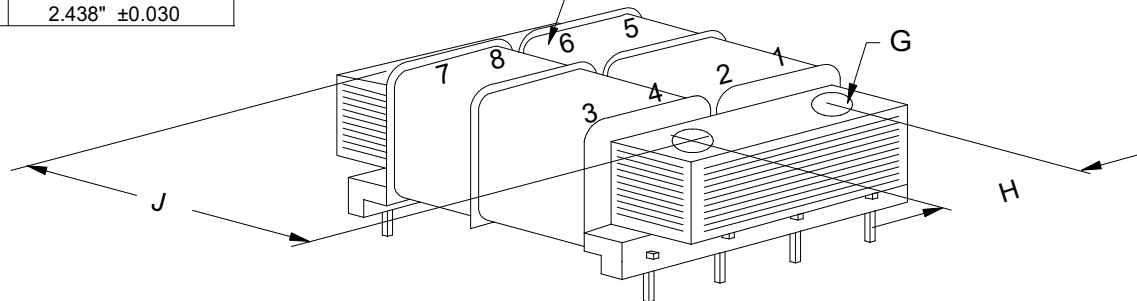

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 115V, 60Hz, PIN 1 - PIN 2	60mA Max.
Sec. N.L.V	@ 115V, 400Hz, PIN 1 - PIN 2	
	PIN 5 - PIN 6 =	18.24V ±2%
	@ 115V, 400Hz, PIN 3 - PIN 4	
	PIN 7 - PIN 8 =	18.24V ±2%
DCR	@ 20°C, PIN 1 - PIN 2 =	72.30Ω ±20%
	@ 20°C, PIN 3 - PIN 4 =	72.30Ω ±20%
	@ 20°C, PIN 5 - PIN 6 =	1.810Ω ±20%
	@ 20°C, PIN 7 - PIN 8 =	1.810Ω ±20%
HIPOT	PRIMARY - SECONDARY	1750V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND MANUFACTURING			
0	RELEASED.	C.I. 03/10/16	ELECTRONIC DIVISION			
1	ADDED "G", "H" & "J" DIM. I _{ex} LIMIT WAS 37mA.	C.I. 08/11/25	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 229C30
			DATE: 03/10/16	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		