



DIMENSIONS:	
A	3.250" ± 0.063
B	1.750" ± 0.125
C	1.995" ± 0.063
D	2.813" ± 0.063
E	0.826" ± 0.015
F	2.326" ± 0.015
G	0.187" ± 0.015

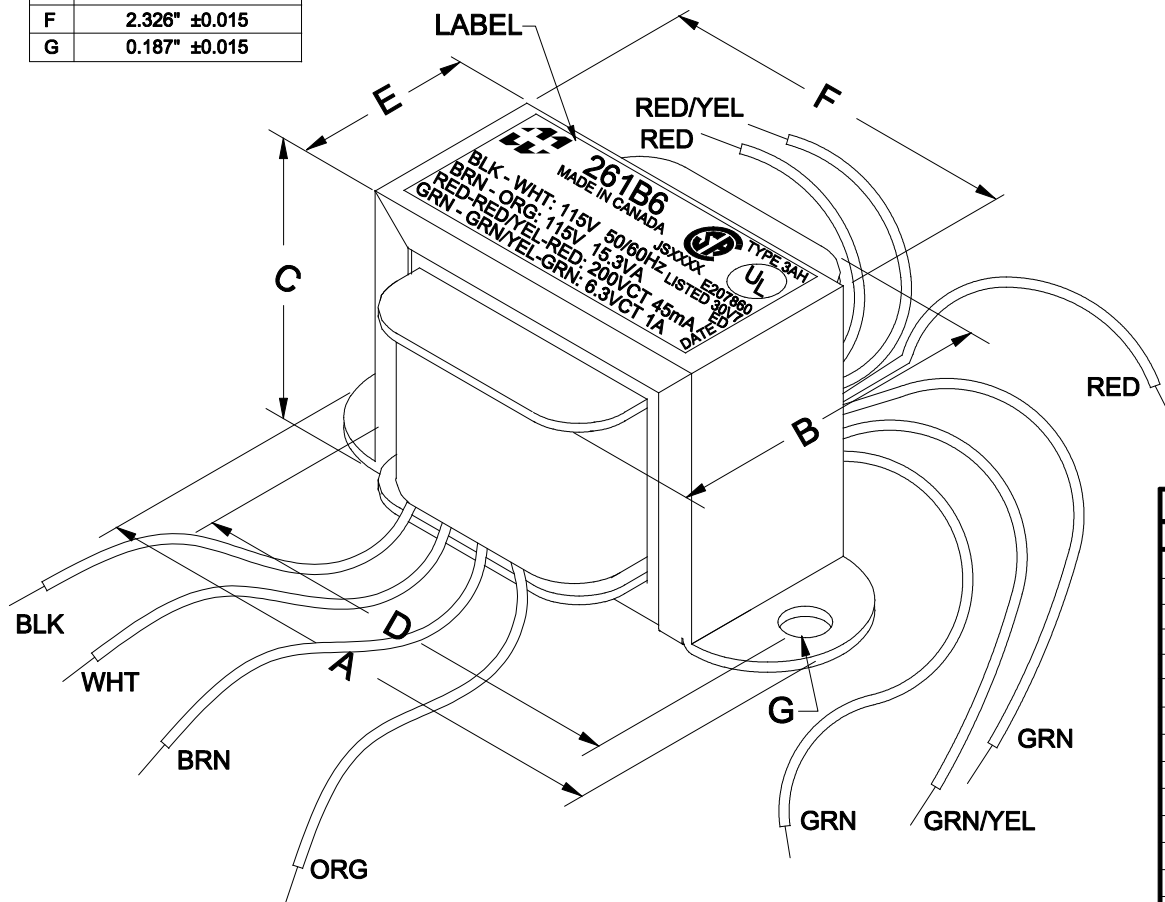

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"

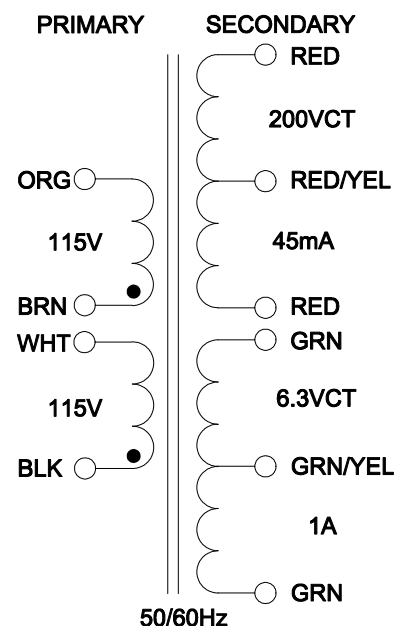

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 115V, 60Hz, BLK - WHT	30mA	Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - WHT		
	BRN - ORG =	115.0V	$\pm 2\%$
	RED - RED =	222.7V	$\pm 2\%$
	RED - RED/YEL = RED/YEL - RED =	111.4V	$\pm 2\%$
	GRN - GRN =	7.034V	$\pm 2\%$
	GRN - GRN/YEL = GRN/YEL - GRN =	3.517V	$\pm 2\%$
DCR	@ 20°C, BLK - WHT =	64.06 Ω	$\pm 20\%$
	@ 20°C, BRN - ORG =	77.13 Ω	$\pm 20\%$
	@ 20°C, RED - RED =	248.2 Ω	$\pm 20\%$
	@ 20°C, GRN - GRN =	0.368 Ω	$\pm 20\%$
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™			
0	RELEASED.	C.I. 02/13/23	ELECTRONIC DIVISION			
			52 RANKIN PLACE,			
			WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. BACIK	CHK'D BY:	TITLE: POWER	DWG. NO.
			DATE: 02/13/23	APP'D. BY:	TRANSFORMER	261B6
				DIMENSIONS: IN(X) MM()		