



DIMENSIONS:	
A	3.250" ± 0.063
B	1.730" ± 0.125
C	1.995" ± 0.063
D	2.813" ± 0.063
E	0.826" ± 0.063
F	2.326" ± 0.015
G	0.187" ± 0.015

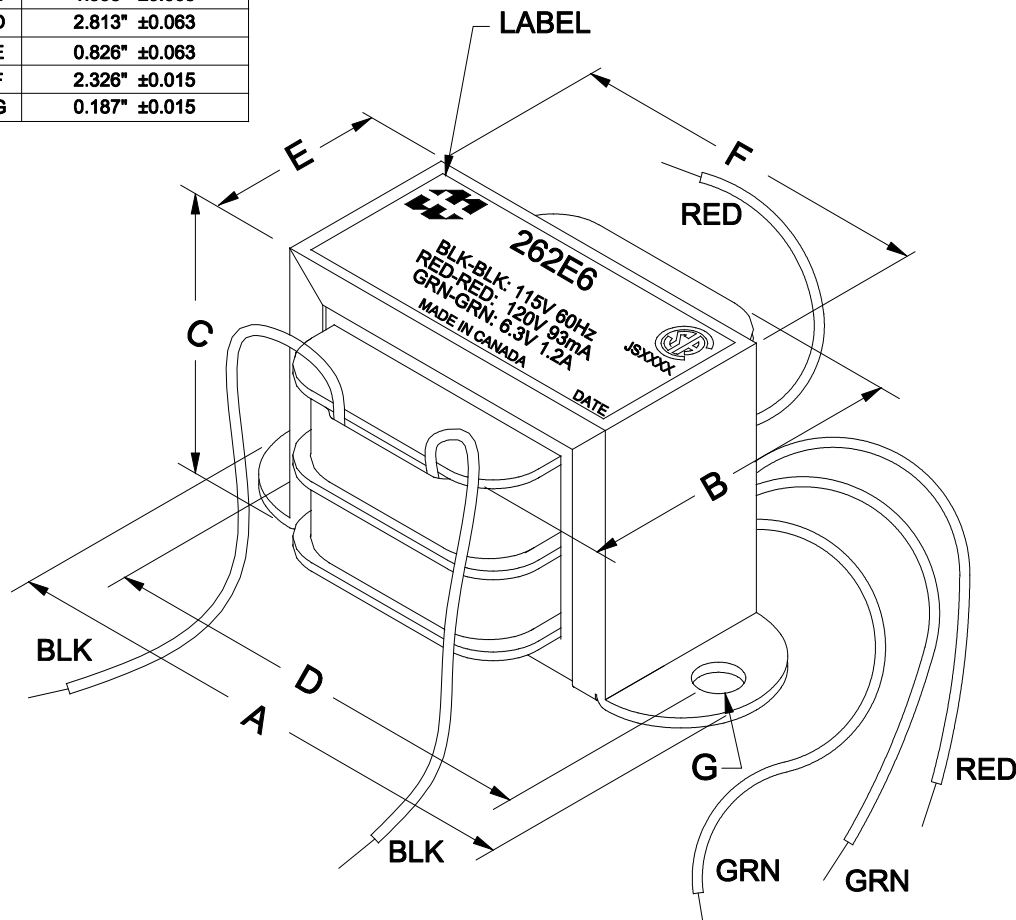

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 115V, 60Hz, BLK - BLK	113mA Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	RED - RED =	136.6V $\pm 2\%$
	GRN - GRN =	7.256V $\pm 2\%$
DCR	@ 20°C, BLK - BLK =	29.22 Ω $\pm 20\%$
	@ 20°C, RED - RED =	65.57 Ω $\pm 20\%$
	@ 20°C, GRN - GRN =	0.323 Ω $\pm 20\%$
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™ ELECTRONIC DIVISION 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5 PH # (519) 886-6181 FAX # (519) 886-9540			
0	RELEASED.	C.I. 05/11/15				
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 262E6
			DATE: 05/11/15	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		