



DIMENSIONS:

A	4.500" ±0.063
B	4.190" ±0.125
C	3.750" ±0.063
D	3.750" ±0.063
E	3.375" ±0.063
F	3.937" ±0.063
G	0.203" X 0.375" ±0.015

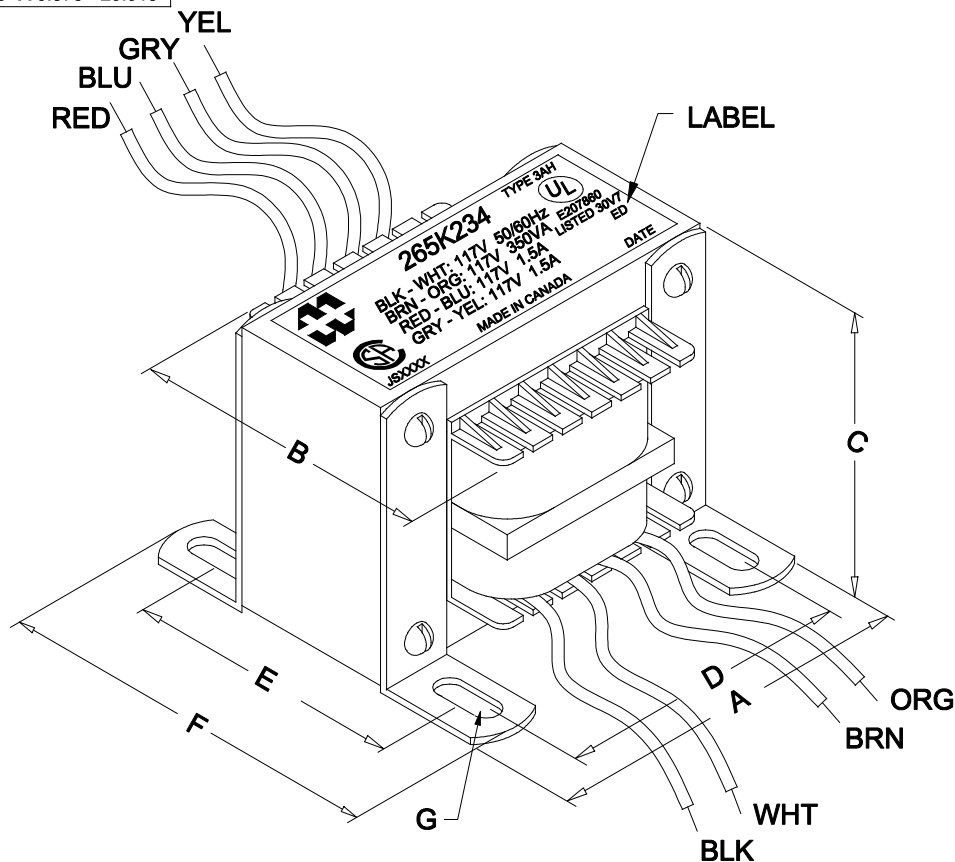

NOTE: ALL LEADS 9.0" OUT MIN.

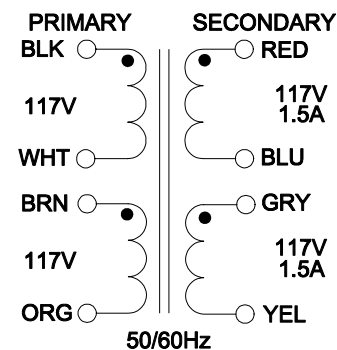

FOR 234V:
CONNECT WHT & BRN

FOR 117V:
CONNECT ORG & WHT,
BRN & BLK

FOR SERIES 234V @ 1.5A
CONNECT GRY & BLU

FOR PARALLEL 117V @ 3A
CONNECT YEL & BLU,
RED & GRY

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
lex	@ 117V, 60Hz, BLK - WHT	486mA	Max.
Sec. N.L.V	@ 117V, 60Hz, BLK - WHT		
	BRN - ORG =	117.0V	±2%
	RED - BLU =	121.3V	±2%
	GRY - YEL =	122.1V	±2%
DCR	@ 20°C, WHT - BLK =	0.997 Ω	±20%
	@ 20°C, BRN - ORG =	1.176 Ω	±20%
	@ 20°C, RED - BLU =	1.034 Ω	±20%
	@ 20°C, GRY - YEL =	1.234 Ω	±20%
HIPOT	PRIMARY - SECONDARY	4000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 12/23/13	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 265K234
			DATE: 12/23/13	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		