



DIMENSIONS:

A	4.125" ±0.063
B	3.625" ±0.125
C	3.438" ±0.063
D	3.438" ±0.063
E	3.000" ±0.063
F	3.562" ±0.063
G	0.203" X 0.375" ±0.015

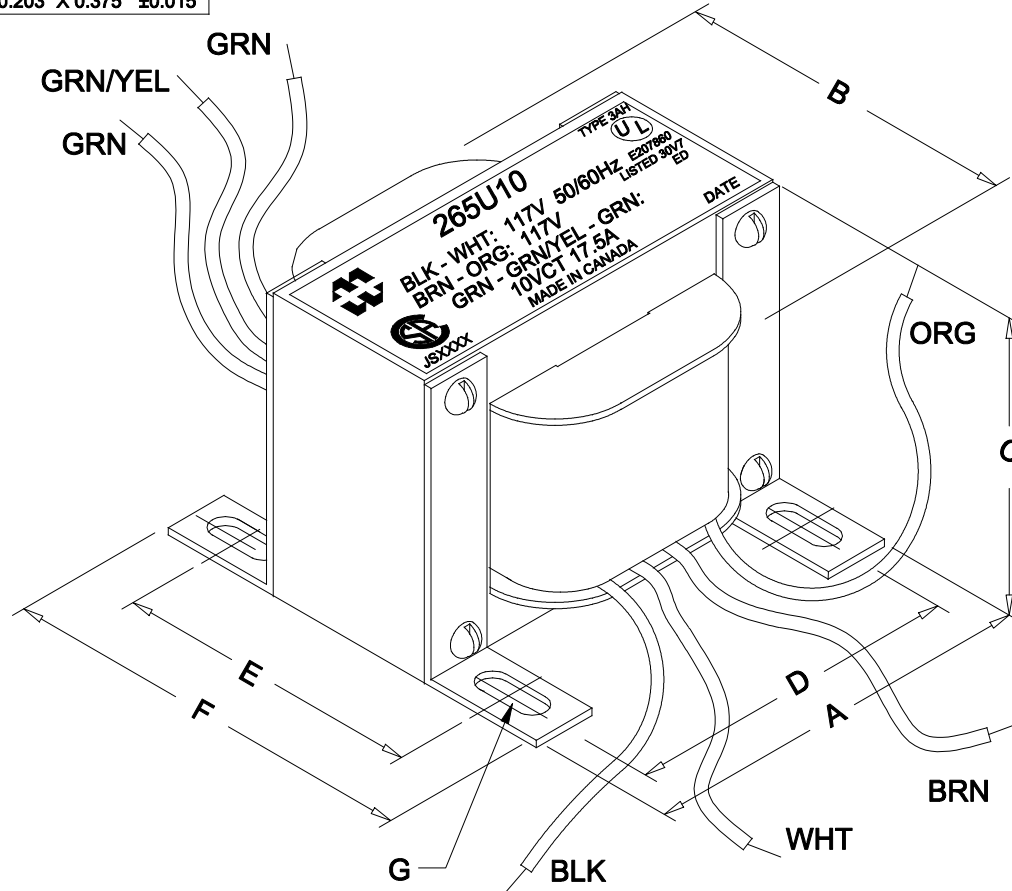

NOTE: ALL LEADS 9.0" LONG MIN.

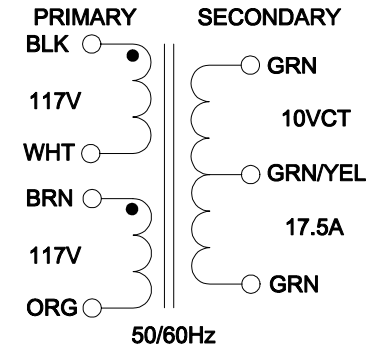

FOR 234V:
CONNECT WHT & BRN

FOR 117V:
CONNECT ORG & WHT,
BRN & BLK

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 117V, 60Hz, BLK - WHT	190mA Max.
Sec. N.L.V	@ 117V, 60Hz, BLK - WHT	
	BRN - ORG =	117.0V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	5.253V ±2%
	GRN - GRN =	10.51V ±2%
DCR	@ 20°C, WHT - BLK =	2.533 Ω ±20%
	@ 20°C, BRN - ORG =	2.754 Ω ±20%
	@ 20°C, GRN - GRN =	0.014 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™ ELECTRONIC DIVISION			
0	RELEASED.	C.I. 12/30/13	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 265U10
			DATE: 12/30/13	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		