
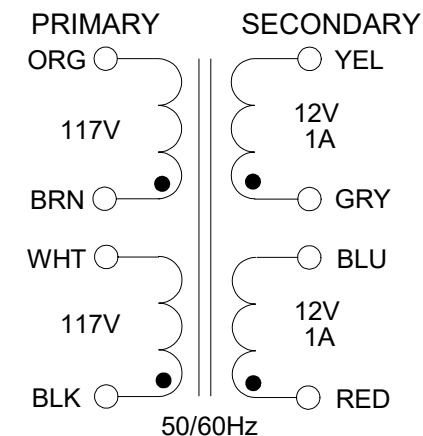


DIMENSIONS:	
A	3.125" ±0.063
B	2.000" ±0.125
C	2.745" ±0.063
D	2.813" ±0.063
E	0.951" ±0.063
F	2.263" ±0.063
G	0.187" ±0.015

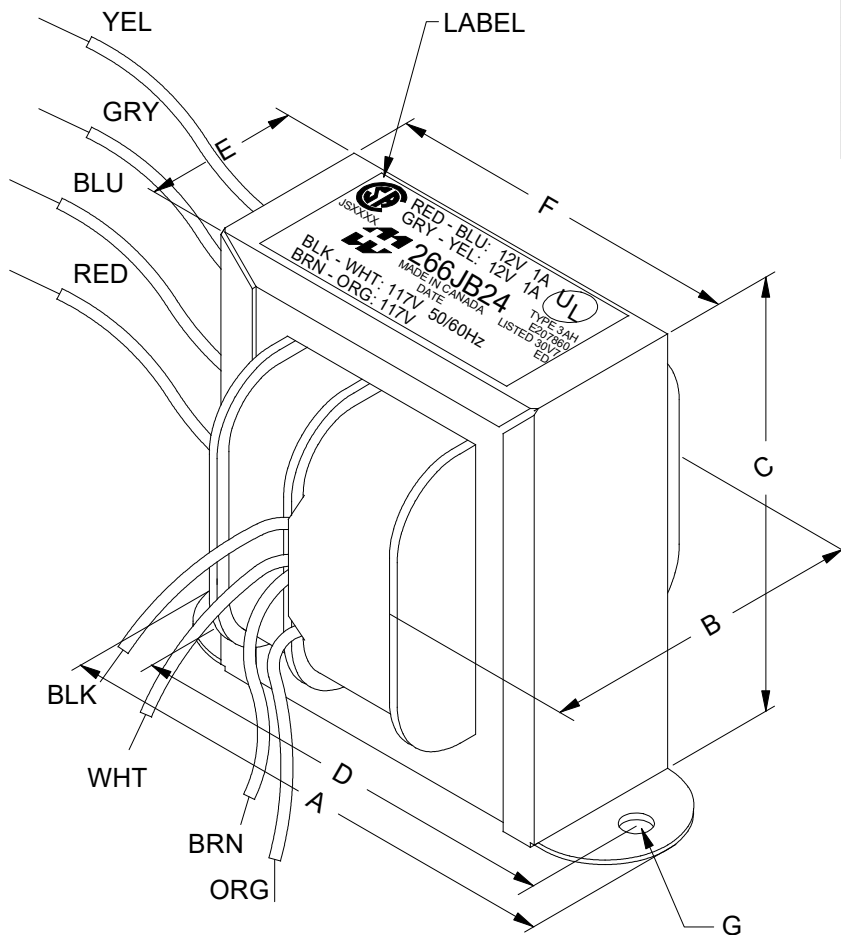

FOR 234V:
CONNECT WHT & BRN
I/P BLK TO ORG

FOR 117V:
CONNECT ORG & WHT,
BRN & BLK
I/P BLK TO WHT

FOR SERIES 24V @ 1A
CONNECT GRY & BLU;
I/P RED TO YEL

FOR PARALLEL 12V @ 2A
CONNECT YEL & BLU,
RED & GRY
I/P RED TO BLU

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 117V, 60Hz, BLK - WHT	81mA Max.
Sec. N.L.V	@ 117V, 60Hz, BLK - WHT	
	BRN - ORG =	117.0V ±2%
	RED - BLU =	12.75V ±2%
	GRY - YEL =	12.75V ±2%
DCR	@ 20°C, BLK - WHT =	25.61 Ω ±20%
	@ 20°C, BRN - ORG =	31.15 Ω ±20%
	@ 20°C, RED - BLU =	0.338 Ω ±20%
	@ 20°C, GRY - YEL =	0.402 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

NOTE: ALL LEADS 6.0" LONG OUT MIN.

REV.#	REVISION	DATE	HAMMOND MANUFACTURING			
0	RELEASED.	C.I. 04/10/25	ELECTRONIC DIVISION			
			52 RANKIN PLACE,			
			WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER	DWG. NO.
			DATE: 04/10/25	APP'D. BY:	TRANSFORMER	266JB24
				DIMENSIONS: IN(X) MM()		