



DIMENSIONS:	
A	4.031" ±0.063
B	2.470" ±0.125
C	2.620" ±0.063
D	3.563" ±0.063
E	1.326" ±0.063
F	3.076" ±0.063
G	0.187" ±0.015

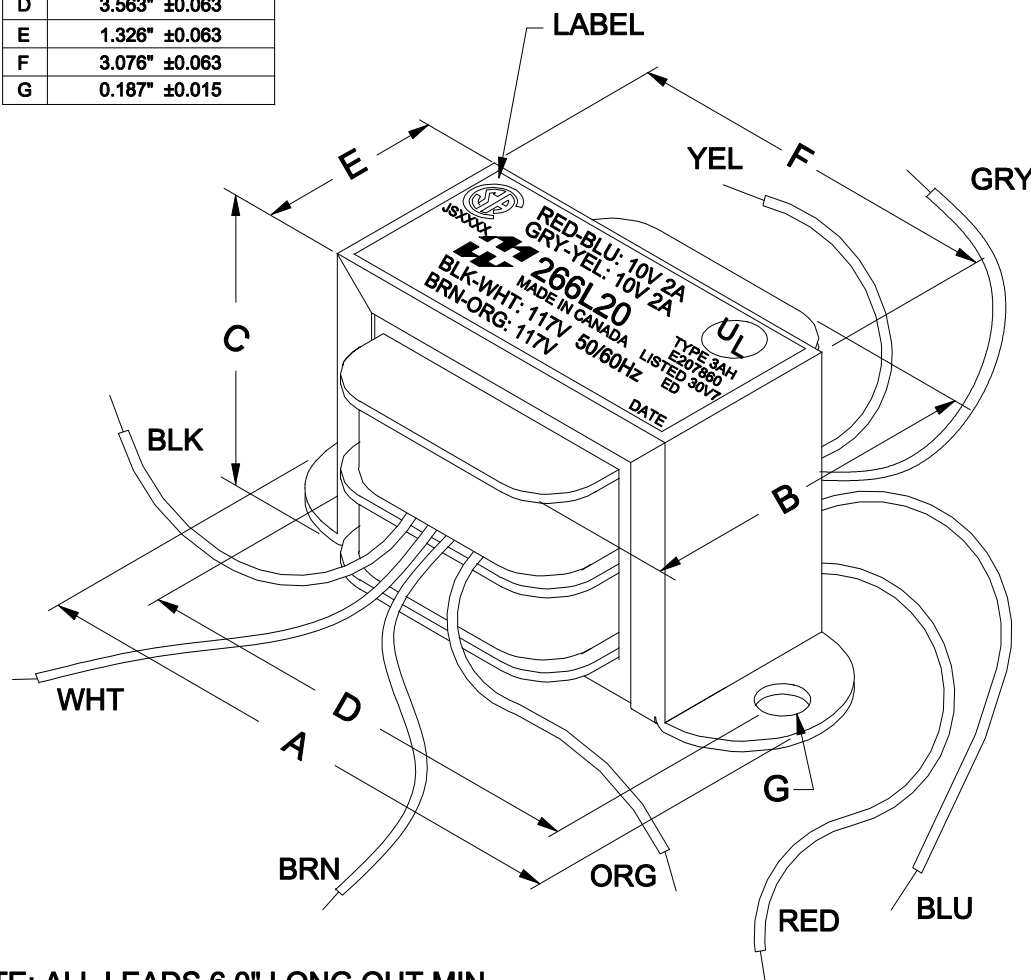

NOTE: ALL LEADS 6.0" LONG OUT MIN.

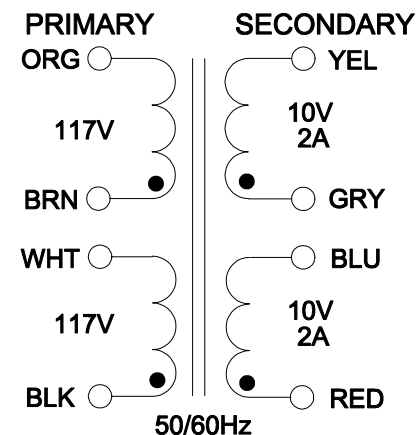

FOR 234V:
CONNECT WHT & BRN
INPUT BLK TO ORG

FOR SERIES 20V @ 2A
CONNECT GRY & BLU
INPUT RED TO YEL

FOR 117V:
CONNECT ORG & WHT,
BRN & BLK
INPUT BLK TO WHT

FOR PARALLEL 10V @ 4A
CONNECT YEL & BLU,
GRY & RED
INPUT RED TO BLU

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 117V, 60Hz, BLK - WHT	72mA	Max.
Sec. N.L.V	@ 117V, 60Hz, BLK - WHT		
	BRN - ORG =	117.0V	±2%
	RED - BLU =	10.68V	±2%
	GRY - YEL =	10.68V	±2%
DCR	@ 20°C, BLK - WHT =	14.95 Ω	±20%
	@ 20°C, BRN - ORG =	17.56 Ω	±20%
	@ 20°C, RED - BLU =	0.140 Ω	±20%
	@ 20°C, GRY - YEL =	0.160 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 08/20/20	MANUFACTURING™ 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO.
			DATE: 08/20/20	APP'D. BY:		266L20
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540