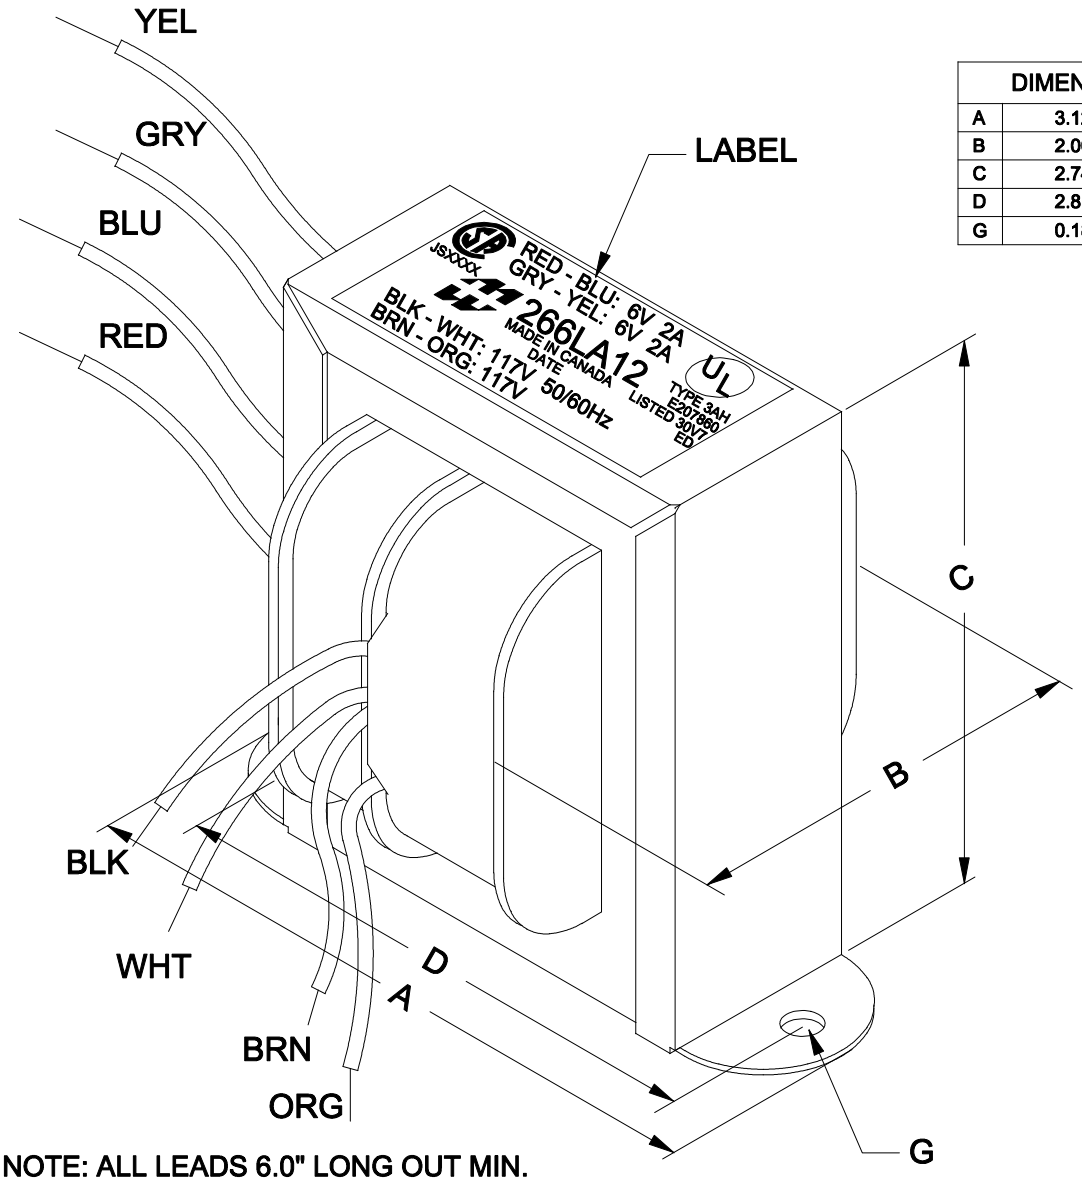

NOTE: ALL LEADS 6.0" LONG OUT MIN.

DIMENSIONS:	
A	3.125" ±0.063
B	2.000" ±0.125
C	2.745" ±0.063
D	2.813" ±0.063
G	0.187" ±0.015

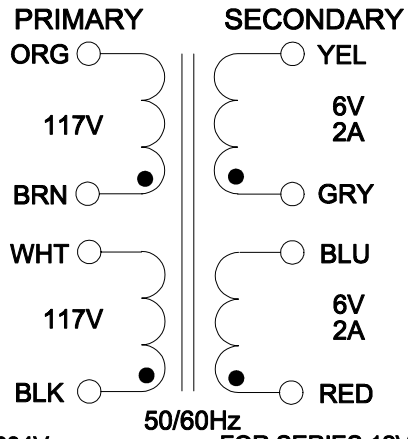

FOR 234V:
CONNECT WHT & BRN
INPUT BLK TO ORG

FOR 117V:
CONNECT ORG & WHT, BRN & BLK
INPUT BLK TO WHT

FOR SERIES 12V @ 2A
CONNECT GRY & BLU
OUTPUT RED TO YEL

FOR PARALLEL 6V @ 4A
CONNECT YEL & BLU, RED & GRY
OUTPUT RED TO BLU

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
Iex	@ 117V, 60Hz, BLK - WHT	81mA	Max.
Sec. N.L.V	@ 117V, 60Hz, BLK - WHT		
	BRN - ORG =	117.0V	±2%
	YEL - GRY =	6.376V	±2%
	BLU - RED =	6.376V	±2%
DCR	@ 20°C, BLK - WHT =	25.61 Ω	±20%
	@ 20°C, BRN - ORG =	31.15 Ω	±20%
	@ 20°C, YEL - GRY =	0.085 Ω	±20%
	@ 20°C, RED - BLU =	0.101 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE
0	RELEASED. C.I.	07/15/19

HAMMOND MANUFACTURING™
ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 266LA12
DATE: 07/15/19	APP'D. BY:		
	DIMENSIONS: IN(X) MM( )		