



DIMENSIONS:	
A	3.750" ±0.063
B	4.435" ±0.125
C	4.560" ±0.063
D	3.000" ±0.063
E	3.313" ±0.063
G	0.203" x 0.375" ±0.015

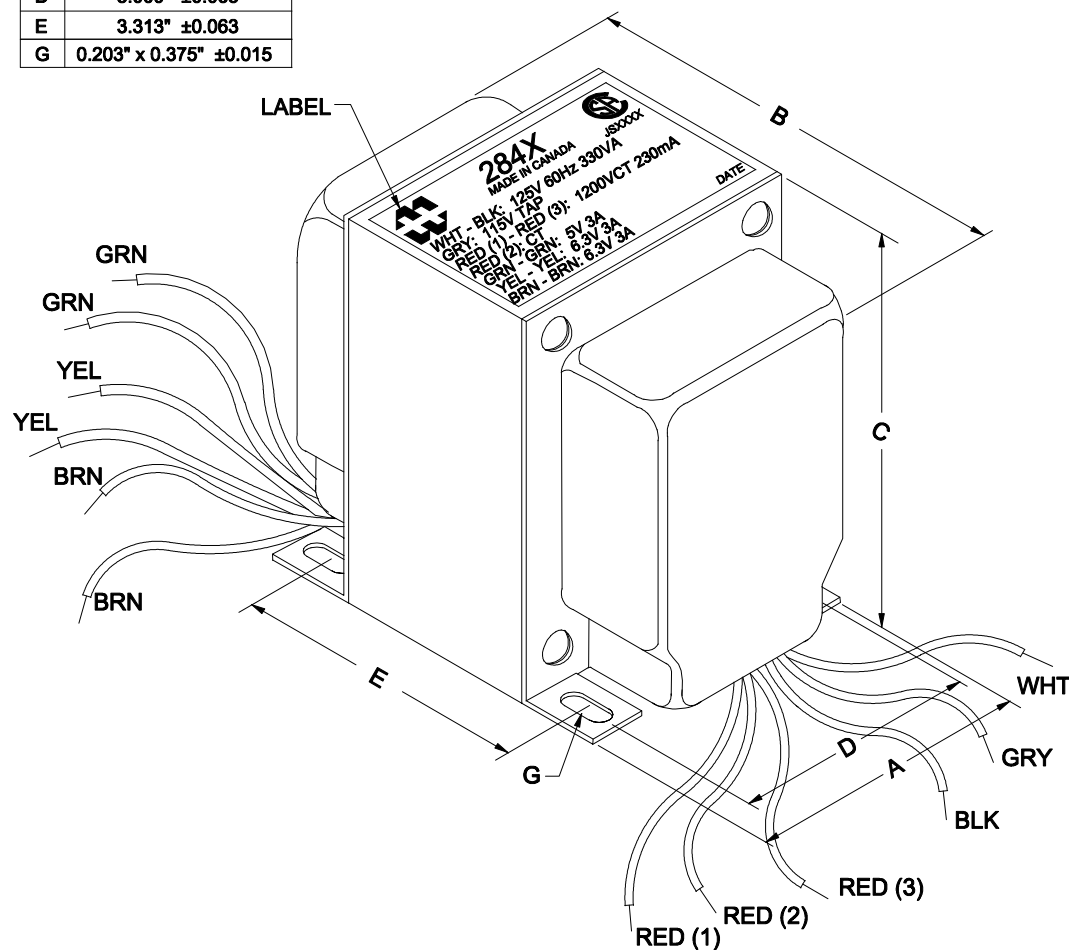

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"

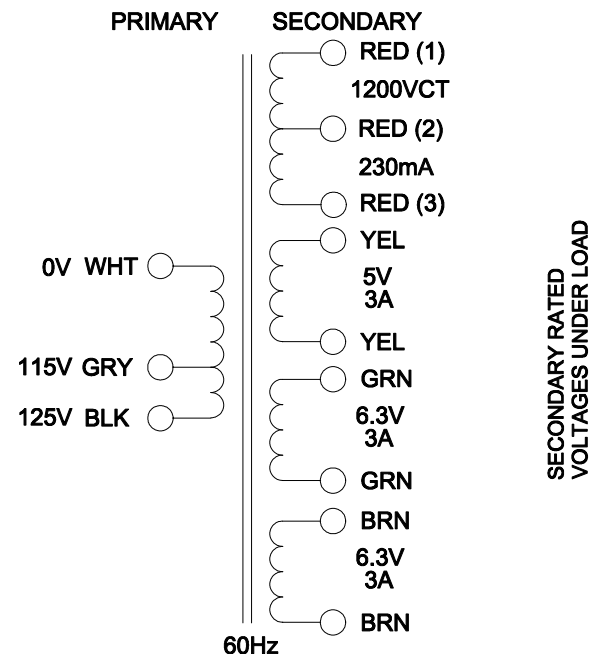

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 125V, 60Hz, WHT - BLK	565mA	Max.
Sec. N.L.V	@ 125V, 60Hz, WHT - BLK		
	WHT - GRY =	115.1V	±2%
	RED (1) - RED (3) =	1246.1V	±2%
	RED (1) - RED (2) = RED (2) - RED (3) =	623.1V	±2%
	YEL - YEL =	5.263V	±2%
	GRN - GRN =	6.579V	±2%
	BRN - BRN =	6.579V	±2%
DCR	@ 20°C, WHT - BLK =	0.668 Ω	±20%
	@ 20°C, RED (1) - RED (3) =	99.25 Ω	±20%
	@ 20°C, YEL - YEL =	0.035 Ω	±20%
	@ 20°C, GRN - GRN =	0.045 Ω	±20%
	@ 20°C, BRN - BRN =	0.047 Ω	±20%
HIPOT	PRIMARY - SECONDARY	4250V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™			
0	RELEASED.	C.I. 09/23/16	ELECTRONIC DIVISION 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 284X
			DATE: 09/23/16	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540