



DIMENSIONS:	
A	3.750" ±0.063
B	4.000" ±0.125
C	4.500" ±0.063
D	1.500" ±0.063
E	3.000" ±0.063
F	3.750" ±0.063
G	0.375" ±0.125

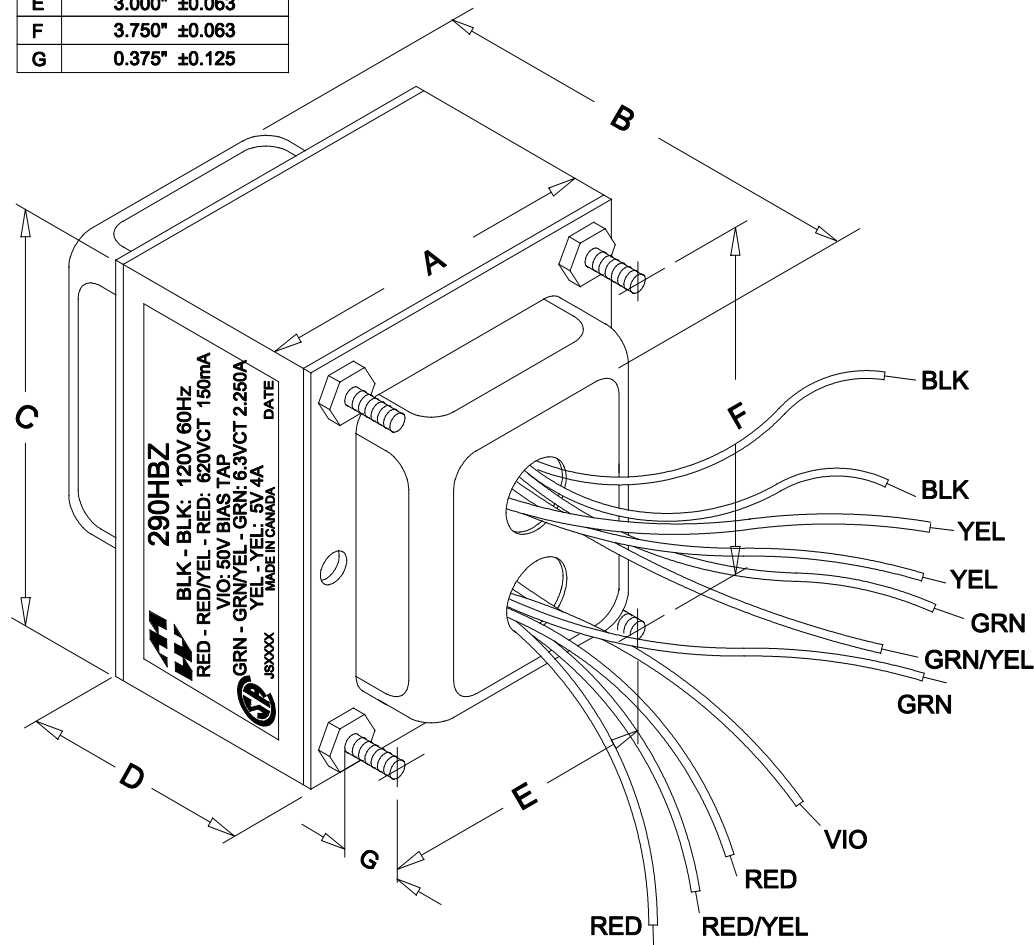

NOTE: ALL LEADS 9" MIN. OUT. STRIP 0.5"

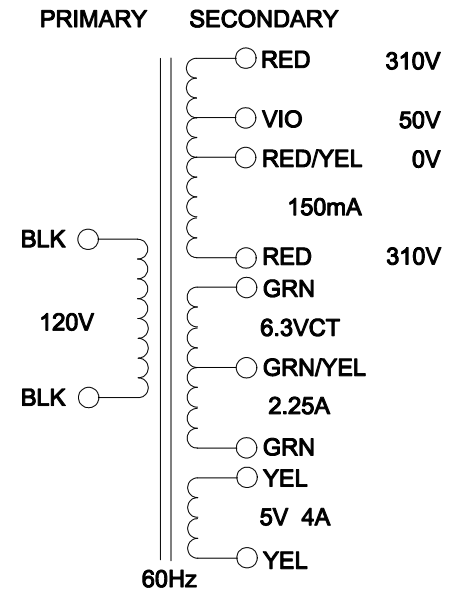

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 120V, 60Hz, BLK - BLK	330mA	Max.
Sec. N.L.V	@ 120V, 60Hz, BLK - BLK		
	RED - RED/YEL = RED/YEL - RED =	320.3V	±2%
	VIO - RED/YEL =	51.65V	±2%
	RED - RED =	640.6V	±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.281V	±2%
	GRN - GRN =	6.562V	±2%
	YEL - YEL =	5.156V	±2%
DCR	@ 20°C, BLK - BLK =	1.235 Ω	±20%
	@ 20°C, RED - RED =	60.80 Ω	±20%
	@ 20°C, GRN - GRN =	0.033 Ω	±20%
	@ 20°C, YEL - YEL =	0.022 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
1	Released	D.H. 11/02/20	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181		FAX # (519) 886-9540	
			DWG. BY: D.Hutt	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 290HBZ
			DATE: 11/02/20	APP'D. BY:		
				DIMENSIONS: IN(X) MM ()		