



DIMENSIONS:	
A	4.500" ±0.063
B	3.750" ±0.063
C	4.000" ±0.063
D	3.750" ±0.063
E	3.000" ±0.063
F	0.375" MIN.

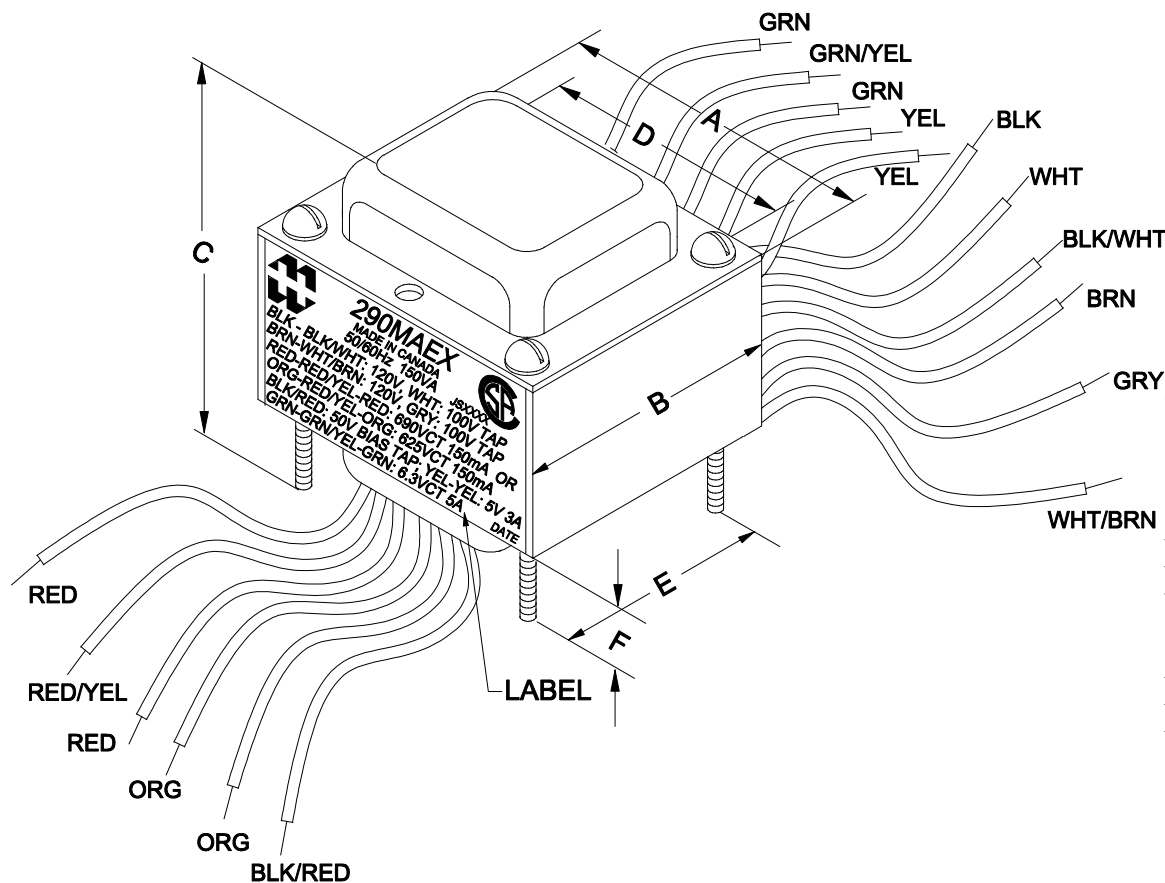

NOTE: ALL LEADS 20.0" MIN. OUT. STRIP 0.5"

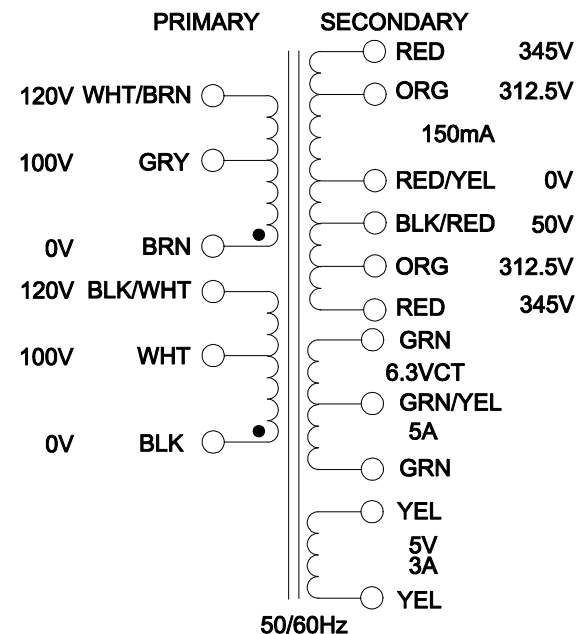

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 120V, 60Hz, BLK - BLK/WHT	140mA	Max.
Sec. N.L.V	@ 120V, 60Hz, BLK - BLK/WHT		
	BRN - WHT/BRN =	120.0V	±2%
	RED - RED/YEL = RED/YEL - RED =	364.6V	±2%
	ORG - RED/YEL = RED/YEL - ORG =	330.4V	±2%
	RED/YEL - BLK/RED =	52.92V	±2%
	ORG - ORG =	660.8V	±2%
	RED - RED =	729.2V	±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.334V	±2%
	GRN - GRN =	6.667V	±2%
	YEL - YEL =	5.417V	±2%
DCR	@ 20°C, BLK - BLK/WHT =	4.539 Ω	±20%
	@ 20°C, BRN - WHT/BRN =	4.868 Ω	±20%
	@ 20°C, RED - RED =	129.9 Ω	±20%
	@ 20°C, ORG - ORG =	117.3 Ω	±20%
	@ 20°C, GRN - GRN =	0.049 Ω	±20%
	@ 20°C, YEL - YEL =	0.066 Ω	±20%
HIPOT	PRIMARY - SECONDARY	3000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™			
0	RELEASED.	C.I. 03/21/23	ELECTRONIC DIVISION			
			52 RANKIN PLACE,			
			WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 290MAEX
			DATE: 03/21/23	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		