
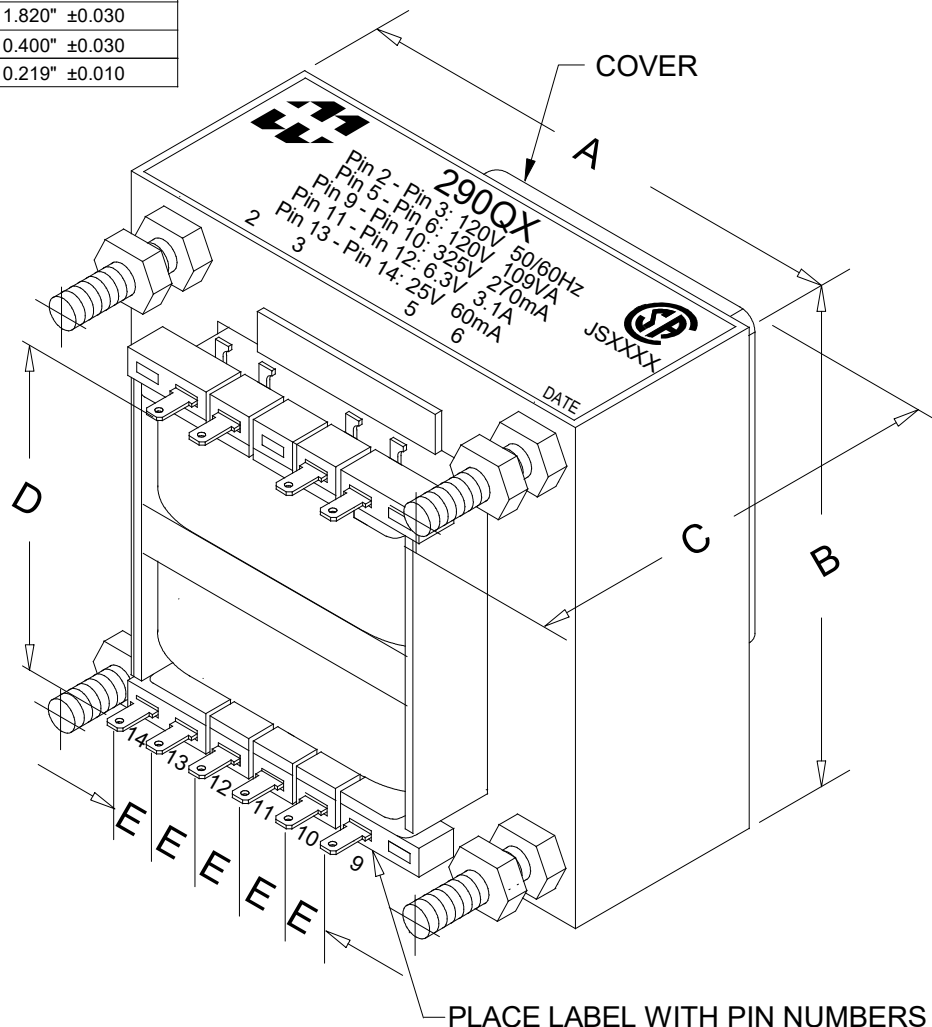


DIMENSIONS:	
A	3.375" ±0.063
B	2.813" ±0.063
C	2.385" ±0.063
D	1.820" ±0.030
E	0.400" ±0.030
G	0.219" ±0.010

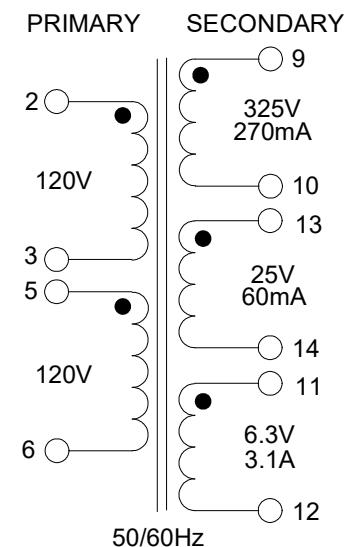

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 120V, 60Hz, Pin 2 - Pin 3	131mA	Max.
Sec. N.L.V	@ 120V, 60Hz, Pin 2 - Pin 3		
	Pin 5 - Pin 6 =	120.0V	±2%
	Pin 9 - Pin 10 =	353.7V	±2%
	Pin 11 - Pin 12 =	6.890V	±2%
	Pin 13 - Pin 14 =	27.27V	±2%
DCR	@ 20°C, Pin 2 - Pin 3 =	7.903 Ω	±20%
	@ 20°C, Pin 5 - Pin 6 =	9.569 Ω	±20%
	@ 20°C, Pin 9 - Pin 10 =	49.11 Ω	±20%
	@ 20°C, Pin 11 - Pin 12 =	0.091 Ω	±20%
	@ 20°C, Pin 13 - Pin 14 =	17.71 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™			
0	RELEASED.	C.I. 03/10/11	ELECTRONIC DIVISION			
1	CORRECTED SEC. CURRENT RATINGS.	D.H. 26/03/12	52 RANKIN PLACE,			
2	DESIGN REVISION.	C.I. 12/09/24	WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181		FAX # (519) 886-9540	
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: 290QX	DWG. NO.
			DATE: 03/10/11	APP'D. BY:	TRANSFORMER	290QX
				DIMENSIONS: IN(X) MM()		