
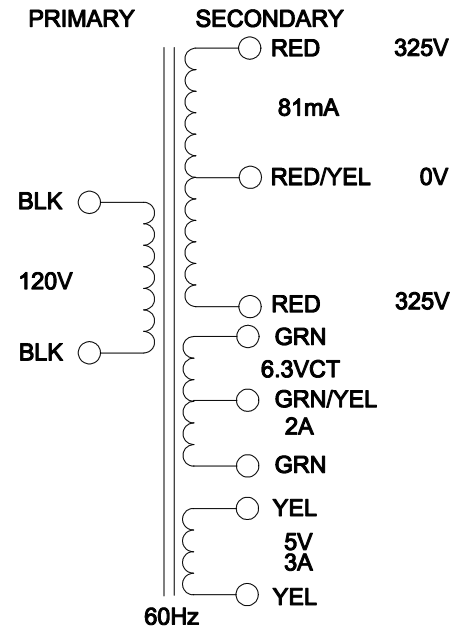


DIMENSIONS:

A	2.500" ±0.063
B	2.817" ±0.125
C	3.000" ±0.063
D	1.280" ±0.063
E	2.000" ±0.063
F	2.500" ±0.063
G	0.750" ±0.125

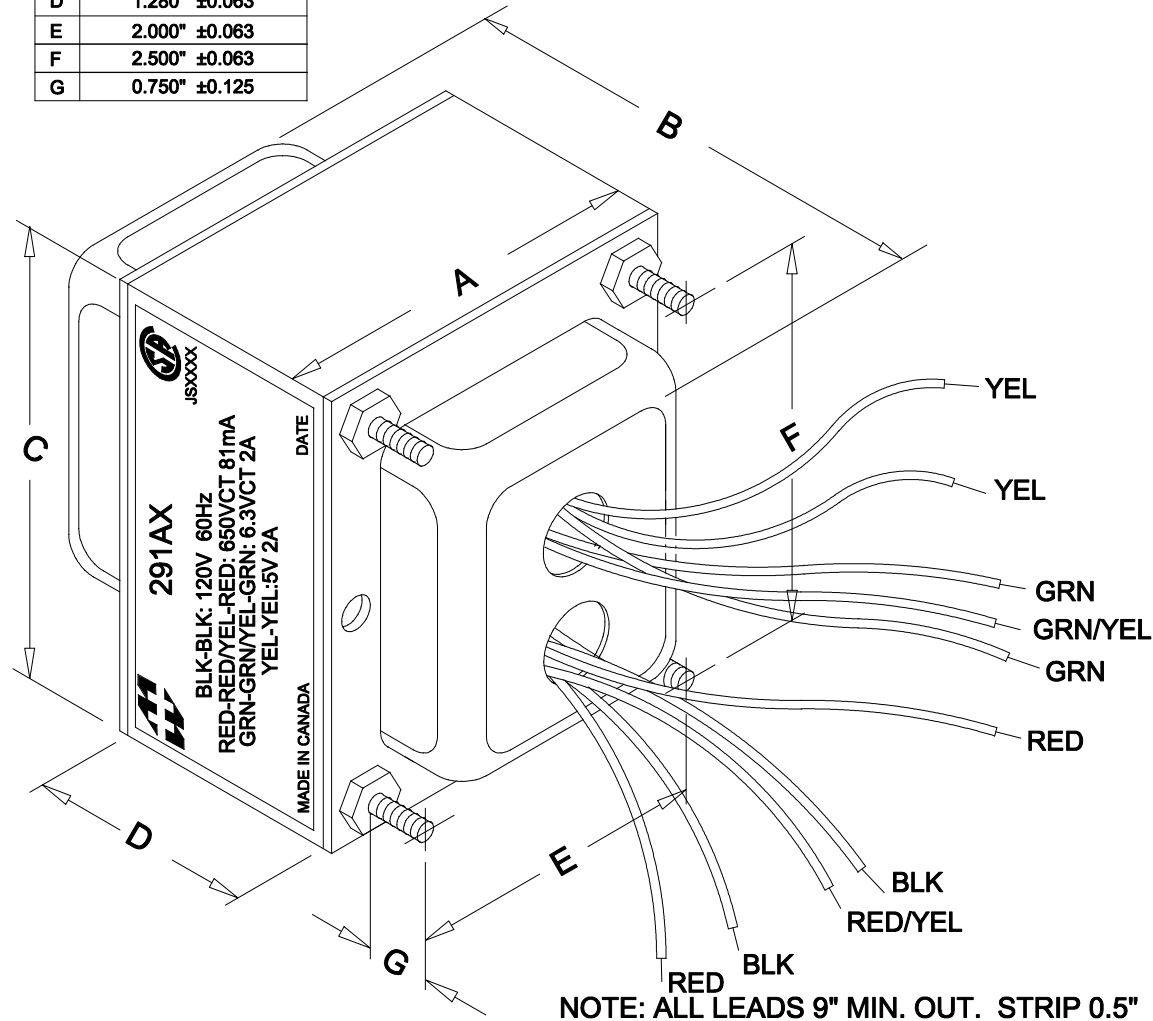

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 120V, 60Hz, BLK - BLK	175mA Max.
Sec. N.L.V	@ 120V, 60Hz, BLK - BLK	
	RED - RED/YEL = RED/YEL - RED =	349.3V ±2%
	RED - RED =	698.6V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.380V ±2%
	GRN - GRN =	6.761V ±2%
	YEL - YEL =	5.352V ±2%
DCR	@ 20°C, BLK - BLK =	4.892 Ω ±20%
	@ 20°C, RED - RED =	333.2 Ω ±20%
	@ 20°C, GRN - GRN =	0.108 Ω ±20%
	@ 20°C, YEL - YEL =	0.088 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 03/05/24	MANUFACTURING™ 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 291AX
			DATE: 03/05/24	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		