



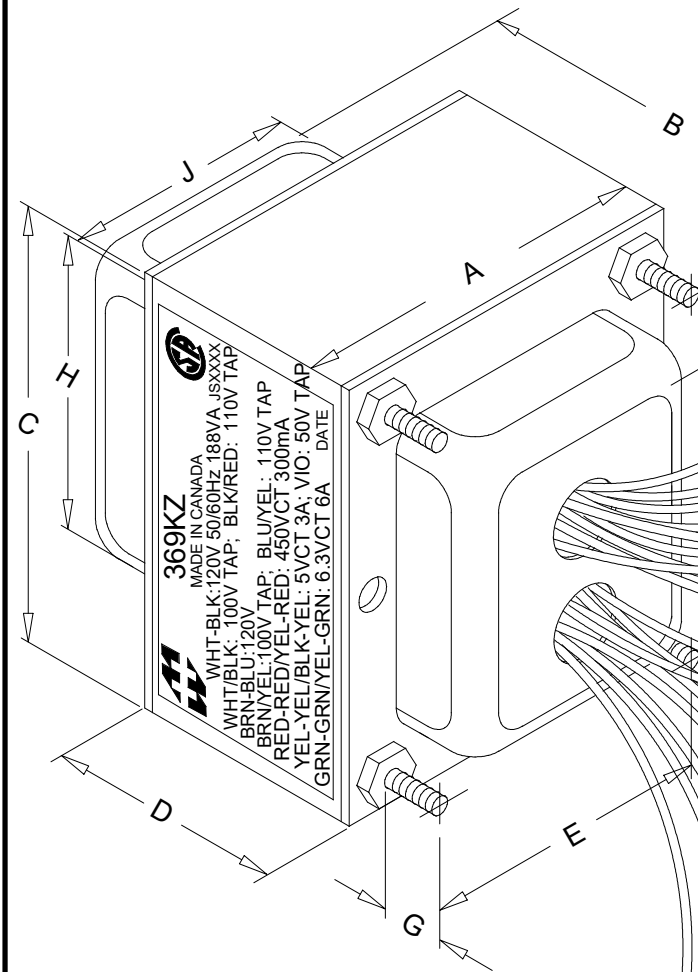

DIMENSIONS:	
A	3.125" ±0.063
B	4.250" ±0.125
C	3.750" ±0.063
D	2.060" ±0.063
E	2.500" ±0.063
F	3.125" ±0.063
G	0.750" ±0.125
H	2.688" ±0.063
J	2.063" ±0.063

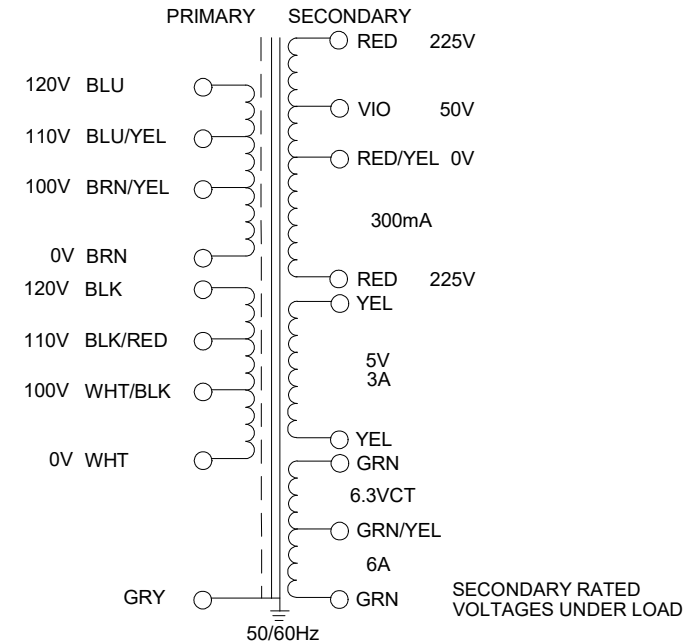

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 120V, 60Hz, WHT - BLK	221mA	Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK		
	RED - RED =	474.2V	±2%
	RED - RED/YEL = RED/YEL - RED =	237.1V	±2%
	RED/YEL - VIO =	52.80V	±2%
	YEL - YEL =	5.280V	±2%
	GRN - GRN =	6.720V	±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.360V	±2%
DCR	@ 20°C, WHT - BLK =	3.075 Ω	±20%
	@ 20°C, BRN - BLU =	3.328 Ω	±20%
	@ 20°C, RED - RED =	36.87 Ω	±20%
	@ 20°C, YEL - YEL =	0.043 Ω	±20%
	@ 20°C, GRN - GRN =	0.029 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

NOTE: ALL LEADS 8" OUT MIN.

REV.#	REVISION	DATE
0	RELEASED.	C.I. 06/18/19
1	REMOVED CT FROM 5V WINDING.	C.I. 05/01/24



ELECTRONIC DIVISION

52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5

PH # (519) 886-6181
FAX # (519) 886-9540

DWG. BY: C. ILIE
DATE: 06/18/19

CHK'D BY:
APP'D. BY:
DIMENSIONS: IN(X) MM()

TITLE: POWER
TRANSFORMER

DWG. NO.
369KZ