



DIMENSIONS:	
A	3.313" ±0.063
B	3.875" ±0.063
C	4.250" ±0.063
D	2.500" ±0.063
E	3.000" ±0.063
F	1.500" ±0.063
G	1/4-20 x 0.500" DEEP INSERTS
H	0.500" ±0.015

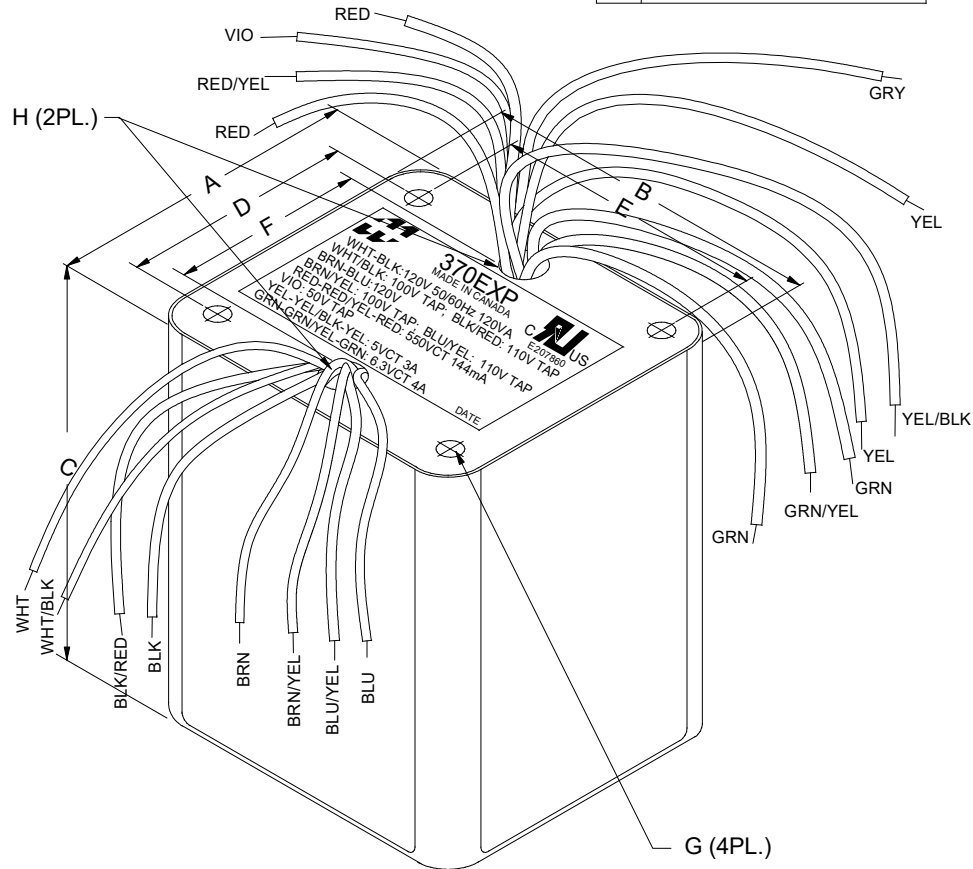

NOTE: ALL LEADS 8" OUT MIN., STRIPPED .5"

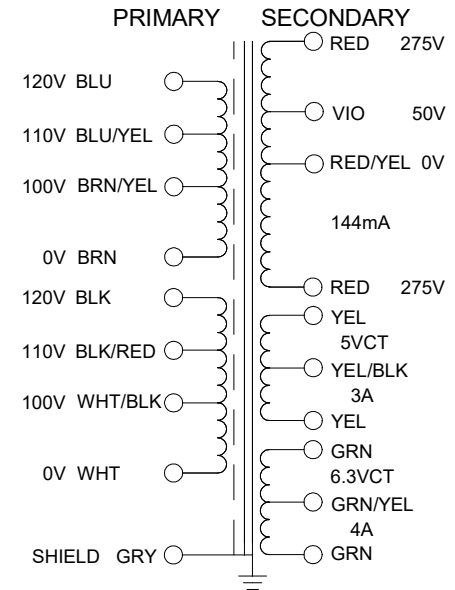

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
lex	@ 120V, 60Hz, WHT - BLK	237mA	Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK		
	RED - RED =	595.2V	±2%
	RED - RED/YEL = RED/YEL - RED =	297.6V	±2%
	RED/YEL - VIO =	50.06V	±2%
	YEL - YEL =	5.486V	±2%
	YEL - YEL/BLK = YEL/BLK - YEL =	2.743V	±2%
	GRN - GRN =	6.857V	±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.429V	±2%
DCR	@ 20°C, WHT - BLK =	5.843 Ω	±20%
	@ 20°C, BRN - BLU =	6.294 Ω	±20%
	@ 20°C, RED - RED =	138.1 Ω	±20%
	@ 20°C, YEL - YEL =	0.067 Ω	±20%
	@ 20°C, GRN - GRN =	0.055 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™			
0	RELEASED.	C.I. 12/09/25	ELECTRONIC DIVISION			
			52 RANKIN PLACE,			
			WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE:	DWG. NO.
			DATE: 12/09/25	APP'D. BY:	PLATE & FILAMENT	370EXP
				DIMENSIONS: IN(X) MM()	POTTED POWER TX.	