



DIMENSIONS:

A	5.281" ±0.063
B	6.596" ±0.125
C	6.360" ±0.063
D	4.250" ±0.063
E	5.000" ±0.063
G	0.281" x 0.750" ±0.015

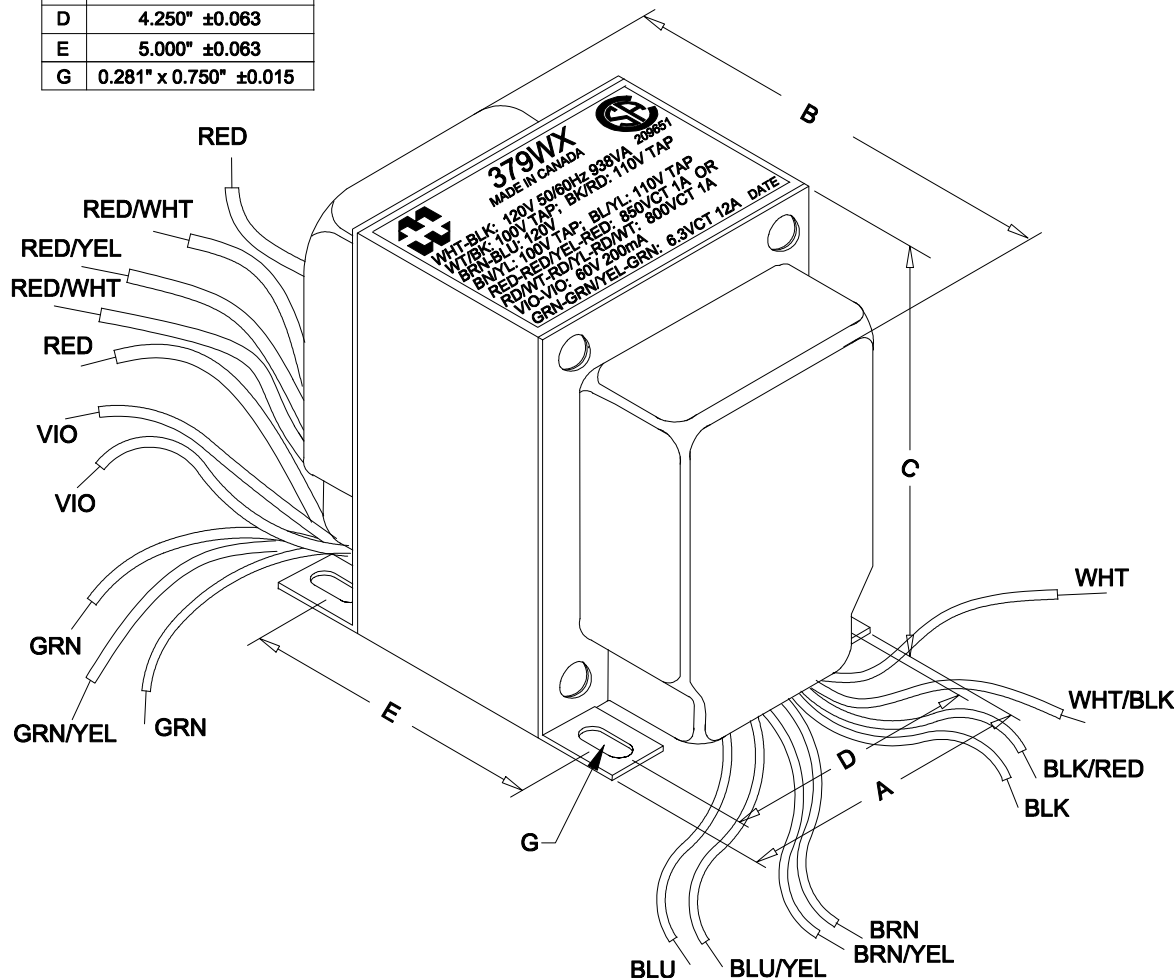

NOTE: ALL LEADS 8" OUT MIN. STRIPPED 0.5

PRIMARY SECONDARY

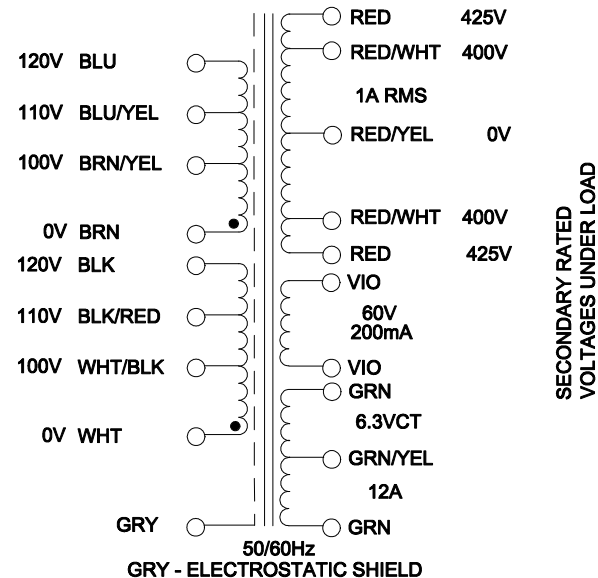

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 120V, 60Hz, WHT - BLK	590mA	Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK		
	RED - RED =	876.4V	±2%
	RED - RED/YEL = RED/YEL - RED =	438.2V	±2%
	RD/WT - RD/YL = RD/YL - RD/WT =	412.5V	±2%
	VIO - VIO =	61.07V	±2%
	GRN - GRN =	6.429V	±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.214V	±2%
DCR	@ 20°C, WHT - BLK =	0.343 Ω	±20%
	@ 20°C, BRN - BLU =	0.376 Ω	±20%
	@ 20°C, RED - RED =	12.38 Ω	±20%
	@ 20°C, RD/WT - RD/WT =	11.58 Ω	±20%
	@ 20°C, VIO - VIO =	0.923 Ω	±20%
	@ 20°C, GRN - GRN =	0.008 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™ ELECTRONIC DIVISION			
0	RELEASED.	D.H. 11/11/11	52 RANKIN PLACE,			
1	CORRECTED DIMENSIONS.	C.I. 05/01/23	WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: D. HUTT	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 379WX
			DATE: 11/11/11	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540