




DIMENSIONS:	
A	2.33" ±0.063
B	2.60" ±0.125
C	1.98" ±0.063

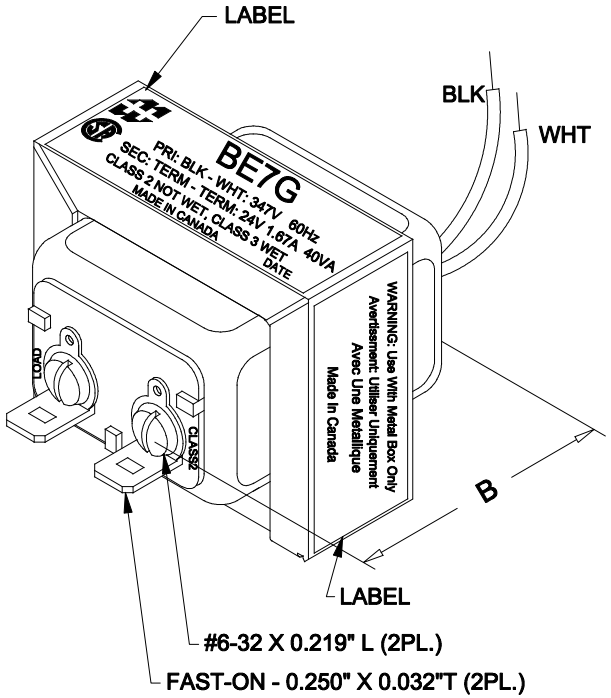

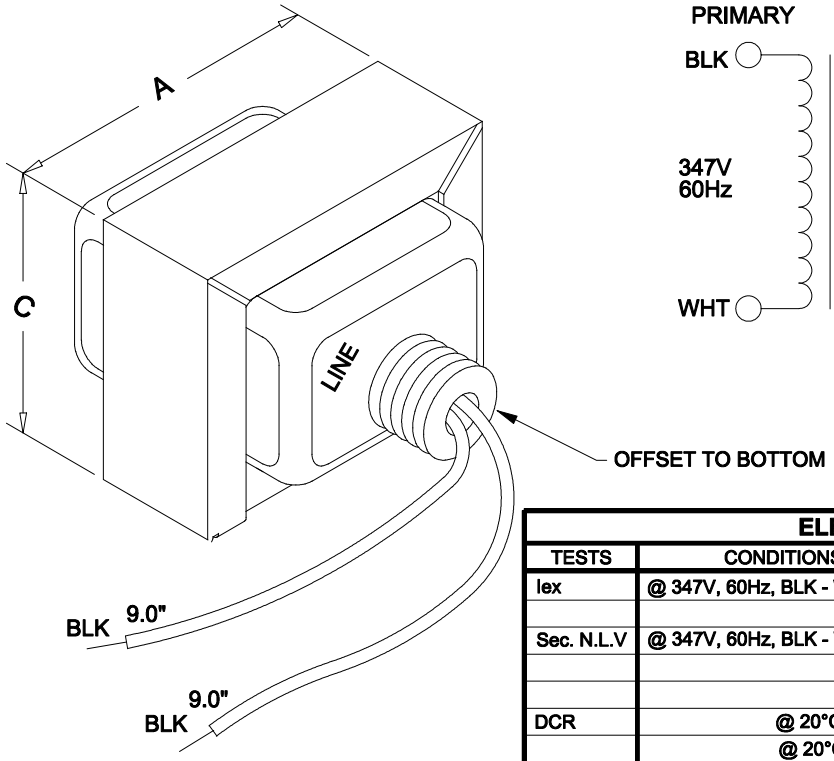

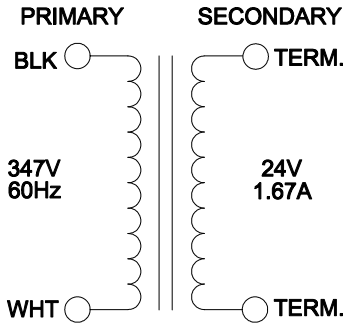

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
Iex	@ 347V, 60Hz, BLK - WHT	50mA	Max.
Sec. N.L.V	@ 347V, 60Hz, BLK - WHT		
	TER - TER =	27.90V	±2%
DCR	@ 20°C, BLK - WHT =	194.6 Ω	±20%
	@ 20°C, TER - TER =	0.782 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC	

REV.#	REVISION		DATE
0	RELEASED.	C.I.	04/25/18
1	ADDED DETAIL ABOUT SCREWS AND TERMINALS.	C.I.	04/26/18

HAMMOND MANUFACTURING™
ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: CLASS 2 ENERGY LIMITING TX.	DWG. NO. BE7G
DATE: 04/25/18	APP'D. BY:		
	DIMENSIONS: IN(X) MM( )		