




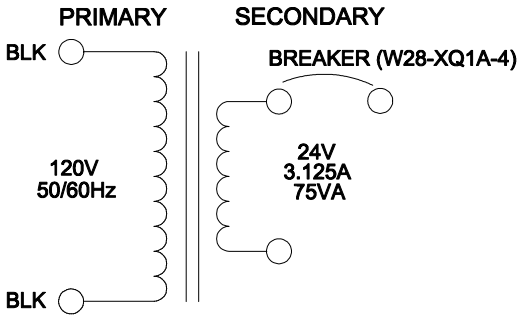

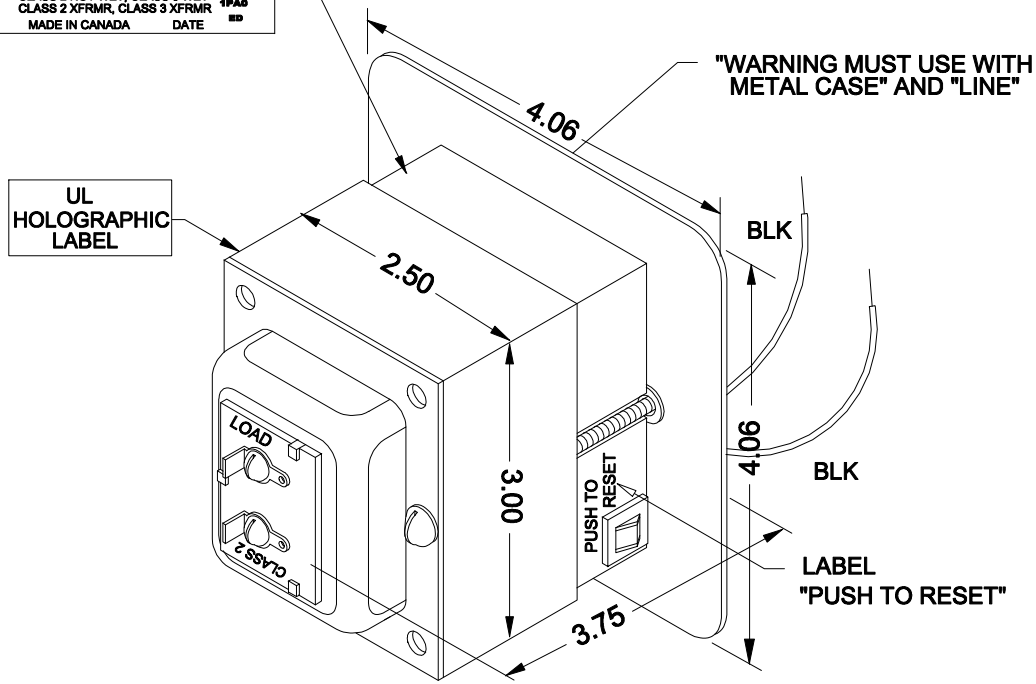

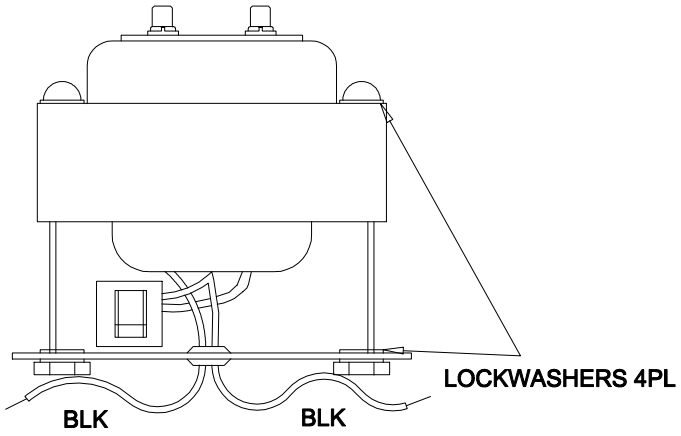

NOTE: ALL LEADS 6" OUT MIN.,STRIPPED .5"

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
Iex	@ 120V, 60Hz, BLK - BLK	120mA Max.
Sec. N.L.V	@ 120V, 60Hz, BLK - BLK	
	TERM - TERM =	27.36V ±2%
DCR	@ 20°C, BLK - BLK =	7.700 Ω ±20%
	@ 20°C, TERM - TERM =	0.430 Ω ±20%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC

REV.#	REVISION	DATE
0	RELEASED. C.I.	03/29/18

HAMMOND MANUFACTURING™
ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: CLASS 2 TRANSFORMER	DWG. NO. BF2G
DATE: 03/29/18	APP'D. BY:		
	DIMENSIONS: IN(X) MM( )		