



# CRYSTAL CAN RADIO FREQUENCY RELAY 75 WATT

**Series  
RFB**

## Product Description

This series of coaxial terminated hermetically sealed relays have been designed to provide reliable switching functions in the most demanding radio frequency applications. The use of 2B relays in the basic construction, has been coupled with a unique and improved termination network to insure faultless performance under severe environmental conditions.

The design concepts employed in each of this series have been time tested through thousands of hours testing and millions of field operations to provide the highest degree of reliability.

The following construction features ensure the highest reliability in extreme environments:


- All welded relay construction
- Cleaning and sealing techniques ensures maximum internal cleanliness
- Low level to 2 amperes auxiliary switching
- 1 or 2 form C, RF contacts, special metal alloy with gold plating
- Frame, armature designs and force / mass ratio provides exceptional shock and vibration immunity
- Coax interconnections
- 200 watt RF carry capability
- 75 watt RF switching capability
- Terminated with 6 inches length RG 196A/u Teflon cable.

## Series Types

- **RFB** 1 form C, SPDT
- **2RFB** 2 form C, DPDT

## Environmental and Physical Specifications

<b>Temperature (Ambient)</b>	- 65°C to + 125°C
<b>Shock</b>	100 g, 6 msec.
<b>Vibration (sinusoidal)</b>	20 g, 10 to 2000 Hz
<b>Acceleration</b>	30 g
<b>Sealing</b>	All welded, Hermetic

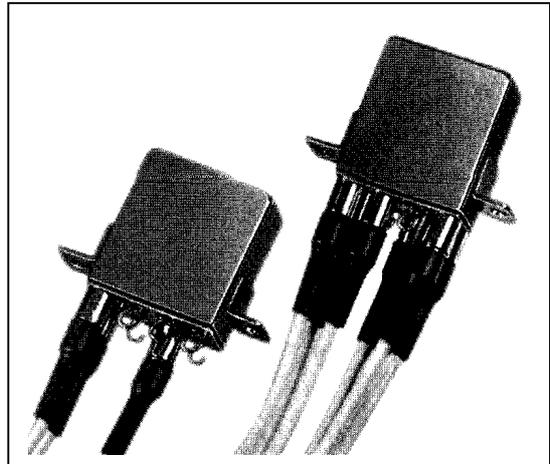

## Electrical Characteristics (over the Temperature range. Unless otherwise noted)

Coil Data	See Typical Characteristics chart		
	Type Load	Contact Load	Cycles min.
Contact Rating	Resistive	2 A / 28 Vdc (aux)	100.000
		75 Watts RF Switching, 200 Watts carry (cold switching)	100.000
Contact Resistance	0,05 Ω max. initial aux. Contact		
Operate Time	6,0 msec. max. at 25°C		
Release Time	3,0 msec. max. at 25°C		
Dielectric Strength	500 Vrms, 60 Hz, all mutually insulated points, at sea level		
Insulation Resistance	1.000 MΩ min. all points at 500 Vdc		
Sensitivity	250 mW at pick-up, at 25 °C		

Frequency range	0 to 500 MHz (derated characteristics to 1000 MHz)	
	Typical at 100 MHz	Typical at 500 MHz
Voltage Standing Wave Ratio (VSWR)	< 1,1 : 1	< 1,2 : 1
Insertion Loss	0,16 dB	0,5 dB
Crosstalk	50 dB	40 dB
Power Switching	75 Watts	50 Watts
Power Handling	200 Watts max.	
Characteristic Impedance	50 or 75 Ω (other impedances available on special order)	

**Figure 1 – Radio Frequency Curves**

Note:

Typical characteristics are based on factory knowledge. Test to ensure compliance, are not performed.

Values shown are in a 50 Ω impedance coaxial system.

