
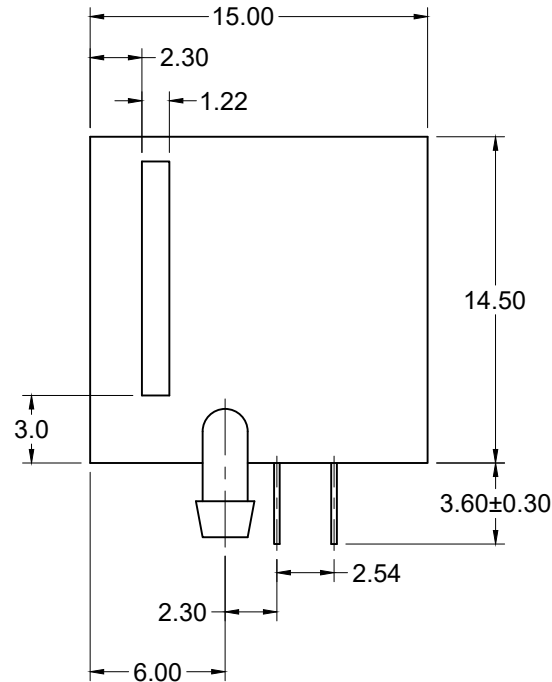


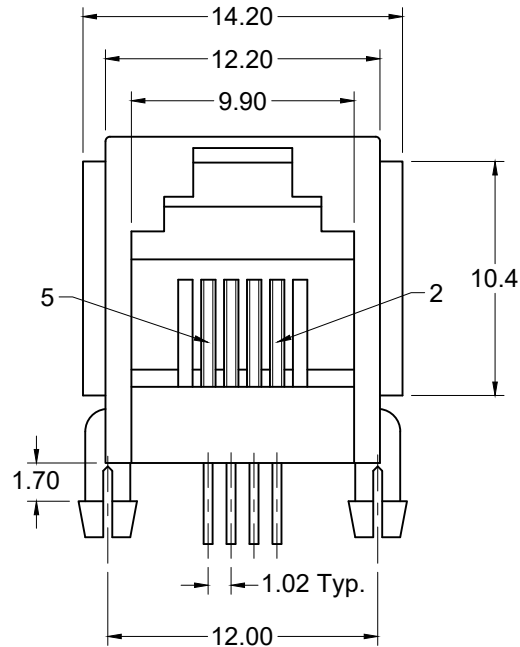

Materials and Finish

Housing Material:
PBT thermoplastic
UL 94V-0 rated

Contact Material:
phosphor bronze

Contact Plating Options:

Standard: gold flash on contact area, tin on solder area, all over nickel underplate

15: 15u" gold on contact area, tin on solder area all over nickel underplate

50: 50u" gold on contact area, tin on solder area all over nickel underplate

Electrical Characteristics

Current Rating:
1.5 Amps


Voltage Rating:
125V DC

Insulation Resistance:
500 Megohms min.

Dielectric Withstanding Voltage:
1000V rms, 60Hz

Contact Resistance:
20 milliohms max.

Operating Temperature:
-40°C to +85°C

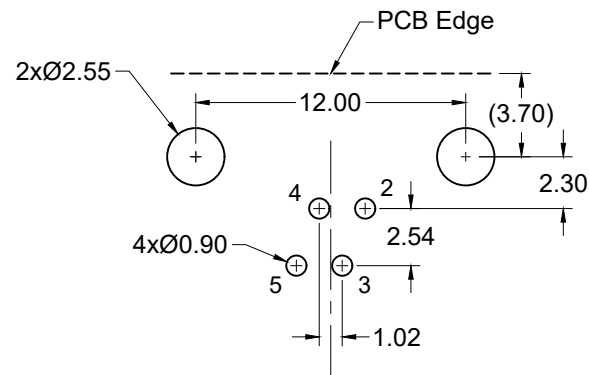

Recommended PCB Layout
(Bottom View)

Part Number	Contact Area Plating Finish	Color
GLX-A-64	Gold Flash (standard)	Grey
GLX-A-64-15	15u" Gold (15 option)	Grey
GLX-A-64-50	50u" Gold (50 option)	Grey
GLX-A-64-BLK	Gold Flash (standard)	Black


RoHS COMPLIANT

cULus
E134345

CS
LR78160

Tolerances
X.X ± 0.35
X.XX ± 0.25
Unless Stated Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A5	05/13/10	ECO #10-025	S. Vien	H. MA	R. Aguirre	9/09/05
A6	12/07/11	ECO #11-081	S. Vien	H. MA		
A7	12/12/13	ECO #13-091	D. Gih	H. MA		
A8	05/30/17	Updated Address	H. MA	N/A		
A9	10/24/25	ECO #25-048	K.Wang	C.Kelleher		
A10	04/10/26	ECO #26-006	C. Kelleher	K. Wang		



GLX-A-64

Mod. Jack, Rt Ang., PCB Mount

6 Position, 4 Contacts, RoHS Compliant

