




KYCON, Inc. 305 Digital Drive, Morgan Hill, CA 95037 (408)494-0330

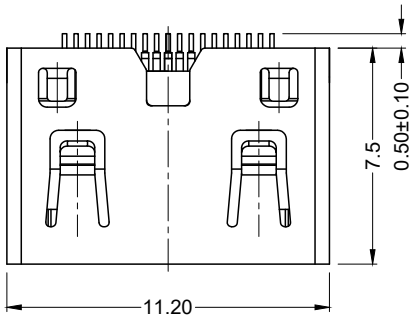


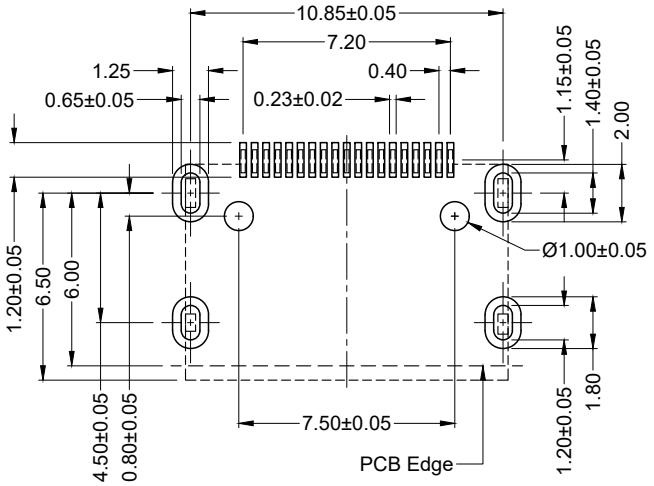

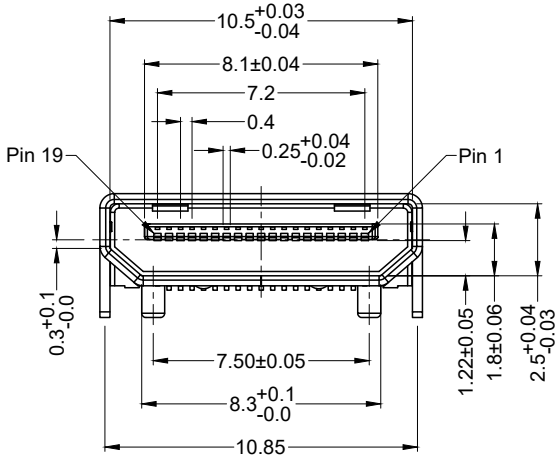

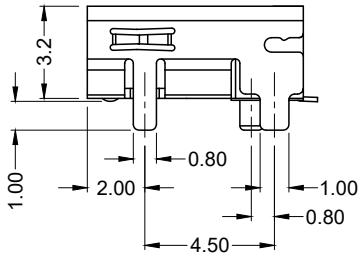

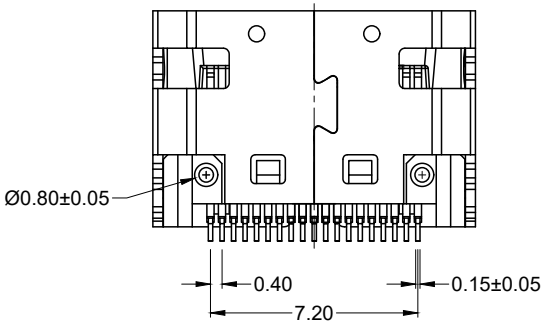

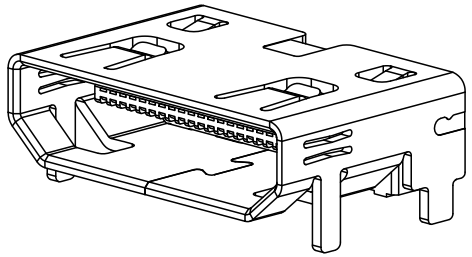

Material and Finish

Housing: High Temp. thermoplastic, UL94V-0 Rated, color - Black

Contacts: Phosphor Bronze

Shield: Nickel plated

Plating Options:
Standard - 30u" Gold in front contacts and Gold Flash in Solder area

Electrical Characteristics

Insulation Resistance:
100 Mohm min.

Dielectric Withstanding Voltage:
500V AC RMS for 1 minute

Operating Rating:
0.5A Max.

Operating Temperature:
-25°C to +85°C

Durability: 5000 Mating Cycles Min.

RoHS COMPLIANT

c UL us
E134345

Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY
A0	08/29/07	New Drawing	A. Frederick	H. MA
A1	10/18/07	Release Drawing	H. MA	N/A
A2	04/26/13	ECO #13-018	W. Cook	P. DalCanto
A3	08/03/18	Address Update	G. Serrato	D. Shehan
A4	09/14/22	ECO #22-025	C. Kelleher	C. Furumasu

DRAWN BY	DATE
A. Frederick	08/22/07
	UNITS
	mm

KMDMIX-NS3A-WS-BTR

HDMI(TM) Mini Connector, Right Angle SMT,

No flange, top spring, T/H Shield, RoHS Compliant

KYCON