



Socket, SE Relays general purpose relay accessory, 3PDT, 16A, 600 V, 11 pins, screw clamp terminal, 750/750H series

70-750DL11-1

viain	۱
-------	---

Product Range	Legacy
Product Type	Socket
Product Compatibility	relay 750XCXR relay 750XCXH suppressor module 70-ASMM diode 70-ASMD signalling device 70-ASMLG suppressor module 70-ASMR jumper wire 16-750CBJ-1
Number of Terminals	11
Switch Function	3PDT
Contact Composition	3 NO + 3 NC
Complementary	
Rated Current	16 A
[Ue] rated operational voltage	300 V

16 A
300 V
Mixed
Output screw clamp terminalssolid Output screw clamp terminalsstranded
< 1 N.m
By screw M3.5, M3.5 panel Clip-on 35 mm DIN rail
Combination roundhead
2.75 oz (78 g)
1.50 in (38 mm)
3.02 in (76.81 mm)

Environment

Ambient Air Temperature for Storage	-40221 °F (-40105 °C)
Ambient Air Temperature for Operation	-40131 °F (-4055 °C)
IP Degree of Protection	IP20
Flame Retardance	UL94-V0
Product Certifications	UL CSA

Ordering and shipping details

GTIN 3606480277993 Offer Sustainability Sustainable offer status Green Premium product California proposition 65 WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov **REACh Regulation REACh Declaration REACh free of SVHC** Yes **EU RoHS Directive** Pro-active compliance (Product out of EU RoHS legal scope) **EU RoHS Declaration** Toxic heavy metal free Yes Yes Mercury free **RoHS** exemption information Yes **China RoHS Regulation** China RoHS declaration **Environmental Disclosure Product Environmental Profile**


never end up in rubbish bins.

The product must be disposed on European Union markets following specific waste collection and

WEEE

Dimensions Drawings

Approximate Dimensions

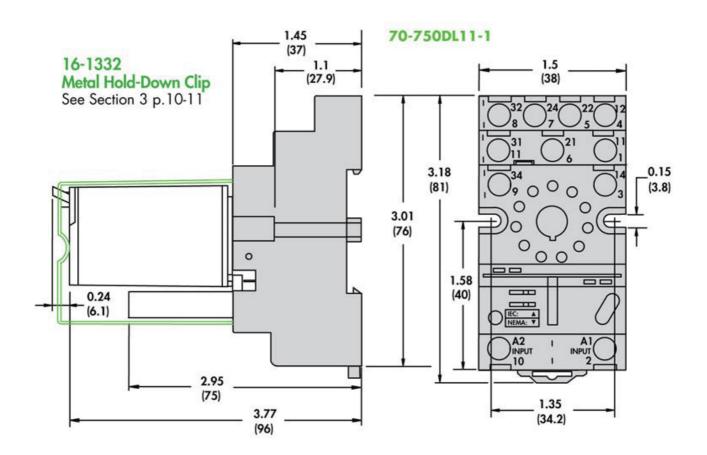

Connections and Schema

Connections and Wiring Diagrams

