Advantages of a Finger-Safe, Ice Cube Socket System

The Complete System Solution!



- Offers a "one stop solution" for your power management system.
- Variety of contact configurations and materials to meet your switching needs.
- Plug-In switching capabilities from 10mA to 20 Amps.
- A variety of Feature Codes and operation combinations available for all budgets.
- Ejector clips, ribbed relay housings and space-saving sockets allow for easy removal from crowded DIN rails.
- Color and appearance designed for high visibility in all environments.
- Wiring diagrams include NEMA and IEC standards.
- Engineering availability allows for customized relay solutions.
- Internal Coil Bus Jumper
 System reduces the number of wires required for hook-up to adjacent sockets.



I.D. Tag/Write-On Plastic LabelUsed for Custom Identification of Circuits.

Isolated Input and Output Terminals

Separates Control Circuits from Load Circuits.

Slim Design

Minimizes Space on DIN Rail. —

Mating Hold-Down Clips Available

Secures Relay to Socket.





DIN Rail End Clip


Locking Screw Keeps a Snug DIN Rail System by Eliminating Sliding Sockets.

DIN Rail


35 mm Extruded Aluminum Rail. Designed to Work With Most Sockets. Pre-punched for Quick Installation.





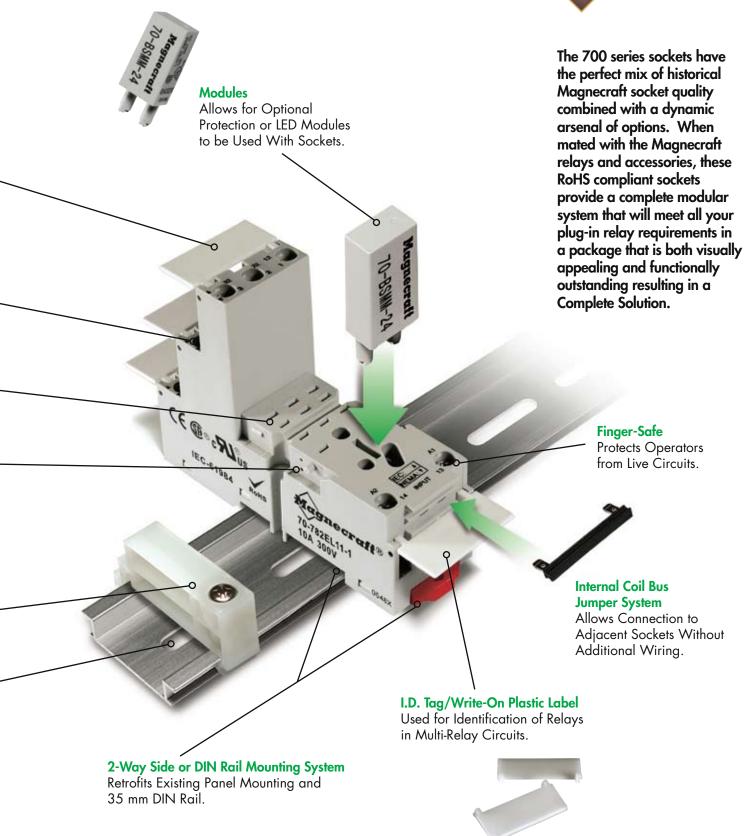



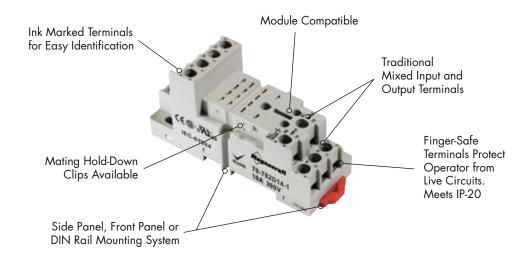









BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED

Standard Part Number Description

70-782D14-1

14-Pin Ice Cube, DIN/Panel Mount with Screw Terminals & Clamping Plates.

General Specifications (UL 508)

| Characteristics | Units | Value | |
|---|----------------|----------------------------|--|
| Number of Terminals | | 14 | |
| | | | |
| Electrical Rating | | | |
| Nominal Voltage Rating | Volts | 300 | |
| Nominal Current Rating | Amps | 10 | |
| male to the | | | |
| Dielectric Strength | V | 3000 | |
| Output to Adjacent Output Terminals | V rms V rms | 3000 | |
| Output to Input Terminals Terminals to Rail / Chassis | V rms V rms | 3000 | |
| terminals to kall / Chassis | VIIIIS | 3000 | |
| Temperature | | | |
| Operating Range: | °C | - 40 to + 80 | |
| Storage Range: | °C | - 40 to + 105 | |
| | | | |
| Construction | | | |
| Protection Category (Finger-Safe) | EN 60529 | IP 20 | |
| Internal Metal Tracks | | Copper Alloy, Zinc Plated | |
| Screw Terminals | | Steel, Zinc Plated | |
| Screw Style | | Combination Head, | |
| Screw size | mm | M3.5 | |
| Screw Torque 3.5 mm (Maximum) | Lb-in / Nm | 9 /1.0 | |
| Miscellaneous | | | |
| Socket Mounting: | | Din / Panel | |
| Wire Size Capacity (Maximum) | EN 60204-1 | AWG mm2 | |
| Soild Cu | AWG, mm2 | 16 / 18 (2) 1.5 / 0.75 (2) | |
| Stranded Cu | AWG, mm2 | 16 / 18 (2) 1.5 / 0.75 (2) | |
| Wire Connection Method | 711107 111112 | Screw Clamping | |
| DIN Rail Mounting | EN 60715 | 35mm | |
| Chassis Mount Screw Torque | Lb-in / Nm | 7 / 0.8 | |
| Flamability Rating | Class | 94V-0 | |
| Body Color | | Light Gray | |
| DIN Locking Method | | Red Plastic Locking Clip | |
| Product Certification | | UL, CSA | |
| Conformance | | CE, RoHS | |
| Weight | grams | 62 | |

Optional Mating Accessories



| Standard Part Number | Description | Catalog Location |
|----------------------|--|--------------------------|
| 782XDX1, 2, 3 & 782H | Relay | Section 1 p.18-19, 42-43 |
| 16-782PC-1 | Plastic Hold-Down Ejector Clip for 782 | Section 3 p.8-11 |
| 16-700ST-1 | Plastic Snap-On I.D. Tag | Section 3 p.12 |
| 16-782SC | Metal Hold-Down Clip for 782 | Section 3 p.8-11 |
| 16-1342 | Metal Hold-Down Clip used with 782H | Section 3 p.8-11 |
| TDR782XDX | Relay | Section 5 p.14-17 |
| 16-TDR782SC | Metal Hold-Down Clip for TDR782 | Section 3 p.8-11 |
| 70-BSM | Module | Section 3 p.6-7 |
| 16-700DIN | Metal DIN Rail | Section 3 p.19 |
| 16-DCLIP-1 | DIN Rail Locking Clip | Section 3 p.19 |

