

# Product data sheet

Specifications



socket, Harmony Electromechanical Relays, for RPM3 power relays, 16A screw clamp terminals, mixed contact

RPZF3

**Product availability: Stock - Normally stocked in distribution facility**

## Main

Range of Product	Harmony Electromechanical Relays
Device short name	RPZ
Product or Component Type	Socket
Product compatibility	Plug-in relay RPM 3 C/O
Contacts type and composition	3 C/O
[Ith] conventional free air thermal current	16 A
[Ue] rated operational voltage	< 250 V

## Complementary

Shape of pin	Flat
Contact terminal arrangement	Mixed
Tightening torque	< 1 N.m M3.5
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
[Uimp] rated impulse withstand voltage	4 kV
Overvoltage category	III
Pollution degree	3
Sale per indivisible quantity	10
Width	1.6 in (40 mm)
Net Weight	0.159 lb(US) (0.072 kg)

## Environment

Connections - terminals	<ul style="list-style-type: none"><li>- screw clamp terminals, flexible with cable end 1 x 0.5...1 x 2.5 mm<sup>2</sup> / AWG 20...AWG 14</li><li>- screw clamp terminals, solid without cable end 1 x 0.5...1 x 1.5 mm<sup>2</sup> / AWG 20...AWG 16</li><li>- screw clamp terminals, flexible with cable end 2 x 0.5...2 x 2.5 mm<sup>2</sup> / AWG 20...AWG 14</li><li>- screw clamp terminals, solid without cable end 2 x 0.5...2 x 1.5 mm<sup>2</sup> / AWG 20...AWG 16</li></ul>
IP degree of protection	IP20 conforming to IEC 60529
Dielectric strength	2500 V
Standards	IEC 61984
Product Certifications	CSA UL

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Marking	CE
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Ambient Air Temperature for Operation	-40...131 °F (-40...55 °C)

## Ordering and shipping details

Category	US10CP221128
Discount Schedule	0CP2
GTIN	3389119402309
Returnability	Yes
Country of origin	TW

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.2 in (3.0 cm)
Package 1 Width	1.6 in (4.0 cm)
Package 1 Length	3.3 in (8.5 cm)
Package weight(Lbs)	2.7 oz (77.0 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	2.5 in (6.3 cm)
Package 2 Width	4.7 in (12 cm)
Package 2 Length	8.0 in (20.2 cm)
Package 2 Weight	27.2 oz (770 g)
Unit Type of Package 3	S03
Number of Units in Package 3	150
Package 3 Height	11.8 in (30 cm)
Package 3 Width	11.8 in (30 cm)
Package 3 Length	15.7 in (40 cm)
Package 3 Weight	27.45 lb(US) (12.45 kg)

## Contractual warranty

Warranty (in months)	18
----------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

Total lifecycle Carbon footprint	0.8 kg CO2 eq.
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Carbon footprint of the manufacturing phase [A1 to A3]	0.7 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0 kg CO2 eq.

### Use Better



### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

### Use Longer



### Lifetime extension

Repair	No
--------	----

### Use Again




### Repack and remanufacture

Circularity Profile	No need of specific recycling operations
Take-back	No

Dimensions Drawings

Dimensions

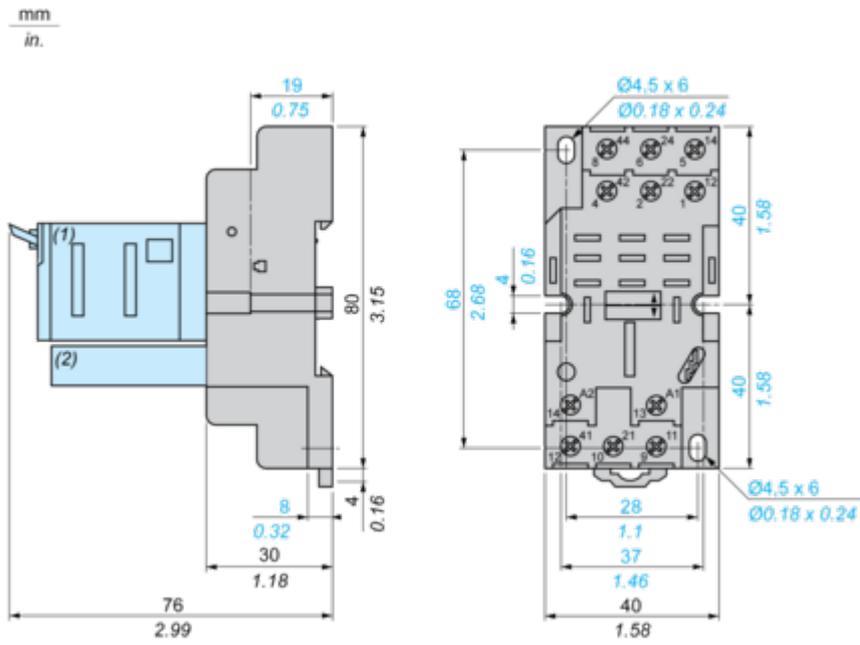


- (1) Relays
- (2) Protection module
- (3) Maintaining clamp

## Connections and Schema

### Wiring Diagram

---

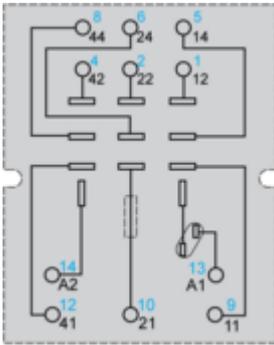

Symbols shown in blue correspond to Nema marking.



Image of product in real life situation

