

Product data sheet

Specifications



socket, Harmony Electromechanical Relays, for RUMC3 relays, 12A, screw connec to rs, separate contact

RUZSC3M

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony Electromechanical Relays
Device short name	RUZ
Product or Component Type	Socket
Product compatibility	Plug-in relay RUM 3 C/O
[Ith] conventional free air thermal current	12 A
[Ue] rated operational voltage	< 250 V
Contacts type and composition	3 C/O

Complementary

Connections - terminals	Connector, 1 x 0.25...1 x 2.5 mm² AWG 22...AWG 14) flexible with cable end Connector, 2 x 0.25...2 x 1 mm² AWG 22...AWG 17) flexible with cable end Connector, 1 x 0.5...1 x 2.5 mm² AWG 20...AWG 14) solid without cable end Connector, 2 x 0.5...2 x 1.5 mm² AWG 20...AWG 16) solid without cable end
Shape of pin	Cylindrical
Tightening torque	< 1 N.m M3.5
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Contact terminal arrangement	Separate
[Uimp] rated impulse withstand voltage	4 kV
Overvoltage category	III
Pollution degree	3
Sale per indivisible quantity	10
Width	1.4 in (36 mm)
Net Weight	0.2 lb(US) (0.1 kg)

Environment

IP degree of protection	IP20 conforming to IEC 60529
Standards	IEC 61984
Product Certifications	CSA UL
Marking	CE
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Ambient Air Temperature for Operation	-40...131 °F (-40...55 °C)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ordering and shipping details

Category	US10CP221128
Discount Schedule	0CP2
GTIN	3389119403238
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.378 in (3.500 cm)
Package 1 Width	2.559 in (6.500 cm)
Package 1 Length	3.780 in (9.600 cm)
Package weight(Lbs)	2.928 oz (83.000 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	4.134 in (10.500 cm)
Package 2 Width	4.331 in (11.000 cm)
Package 2 Length	7.165 in (18.200 cm)
Package 2 Weight	31.005 oz (879.000 g)
Unit Type of Package 3	S03
Number of Units in Package 3	80
Package 3 Height	11.811 in (30.000 cm)
Package 3 Width	11.811 in (30.000 cm)
Package 3 Length	15.748 in (40.000 cm)
Package 3 Weight	16.779 lb(US) (7.611 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer


Lifetime extension	
Repair	No

Use Again

Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No


Dimensions Drawings

Dimensions

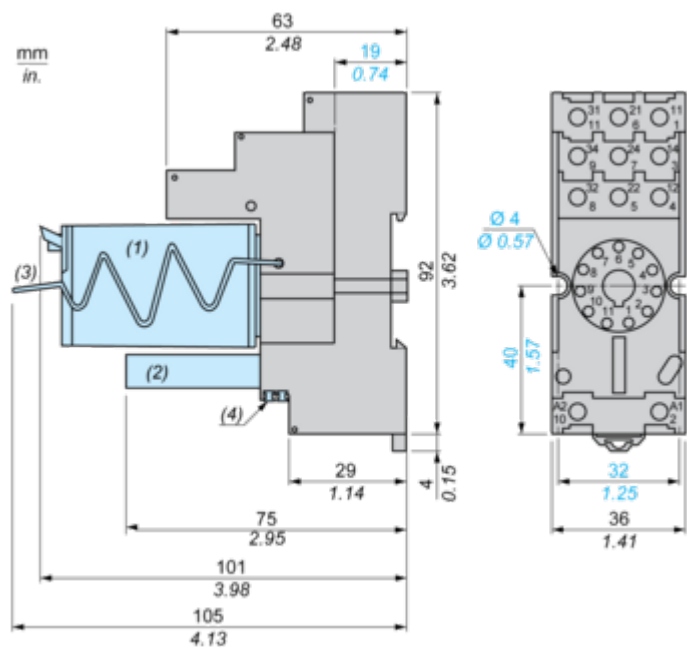

Connections and Schema


Wiring Diagram

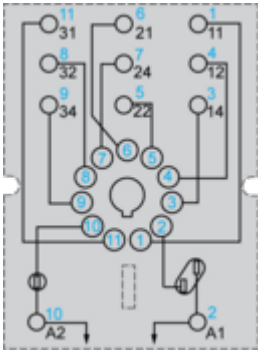

Symbols shown in blue correspond to Nema marking.

Bus Jumpers Mounting on Sockets with Separate Contacts

Example of RUZS2 bus jumper mounting on sockets (view from below)

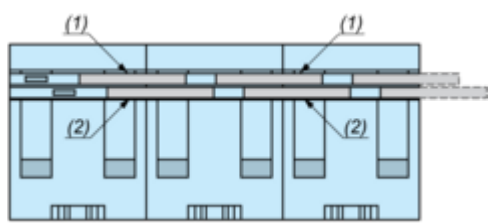

- (1) 2 bus jumpers (polarity A2)
- (2) 2 bus jumpers (polarity A1)

Technical Illustration

Dimensions

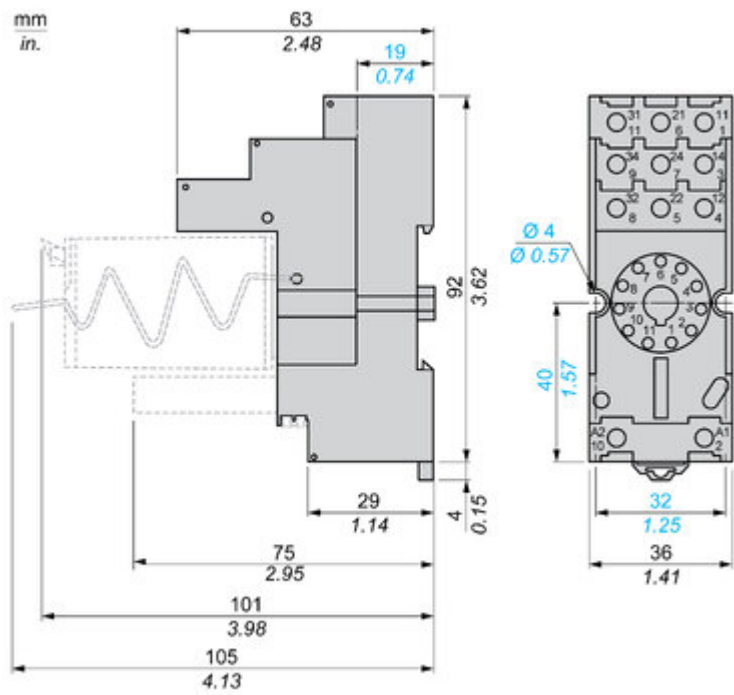
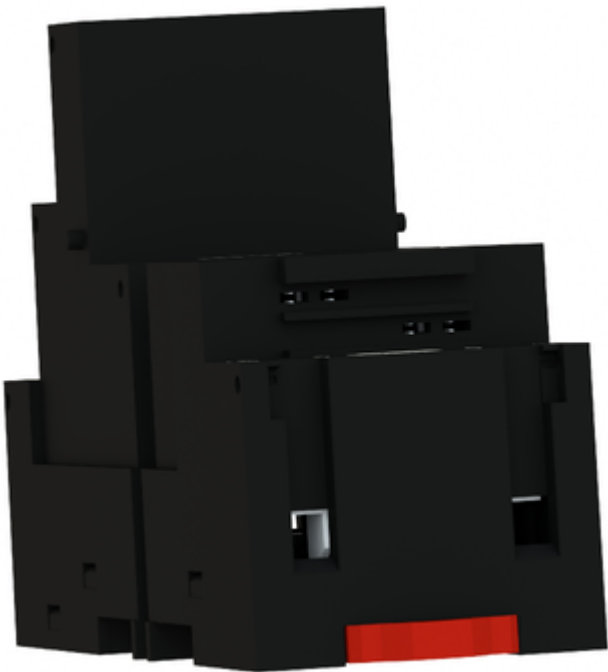


Image of product / Alternate images

Alternative



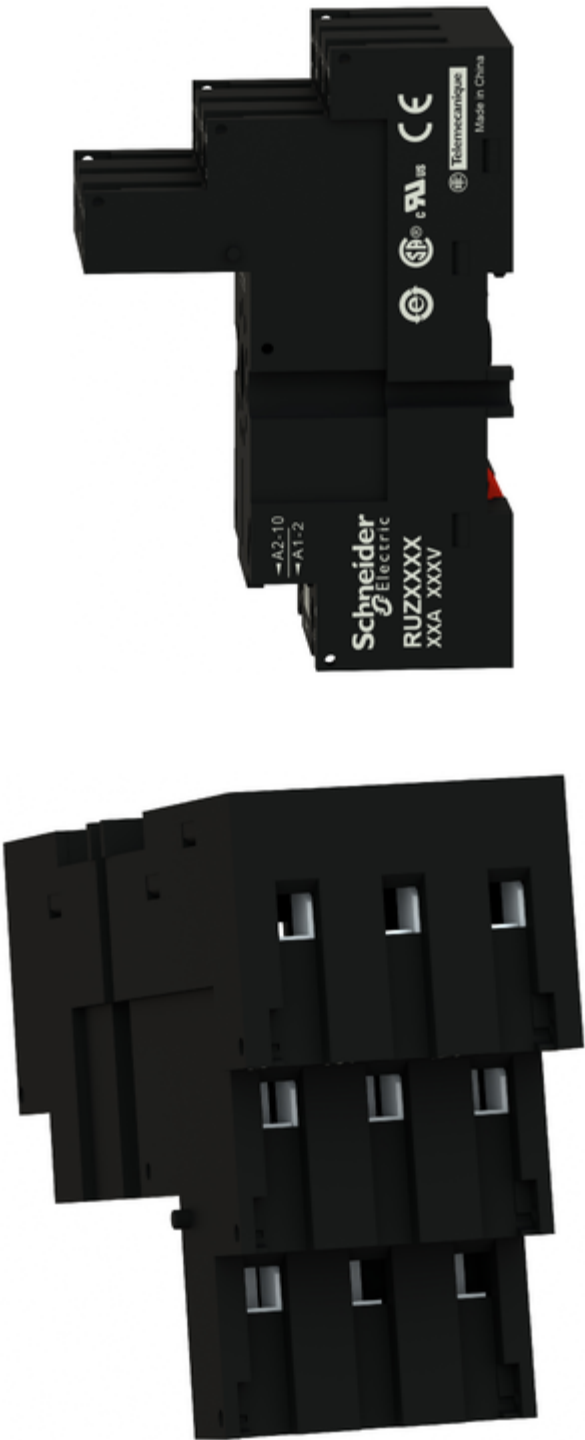




Image of product in real life situation

