

## Cylindrical Reed Sensors with M8 Thread



### DESCRIPTION

MK07 sensors are magnetically operated Reed proximity switches in a cylindrical form with an 8 mm x 0.75 thread and connecting cable or coupler. The sensor can be screwed directly onto a fixed surface with the actuating magnet on the moving surface. The widespread termination "T" or "U" makes the MK7 series compatible with several inductive and magnetic proximity sensors.

### APPLICATIONS


- **Position and limit switch**  
Pneumatic or hydraulic actuator position  
Indication and end travel limit switch
- **Door and window contacts**  
Security system applications
- **Level sensor**  
Use with magnetic floats for water level detection in coffee makers, washing machines or dishwashers

### FEATURES

- Form A, B, and C available
- High power switches available
- Other cables, connectors and colors available
- Various case sizes available
- Five operate sensitivities available
- A choice of cable terminations and lengths are available

### DIMENSIONS

All dimensions in mm [inch]

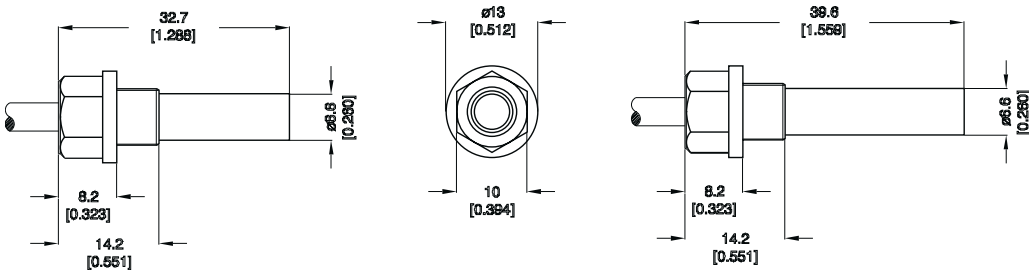

**ORDER INFORMATION**

**Part Number Example**

MK07 - 1A66 C - 500 W

**1A** is the contact form  
**66** is the switch model  
**C** is the magnetic sensitivity  
**500** is the cable length (mm)  
**W** is the termination

Series	Contact form	Switch-model	Magnetic Sensitivity	Cable Length (mm)	Termination
<b>MK07 - MK07/1 -</b>	<b>XX</b>	<b>XX</b>	<b>X -</b>	<b>XXX</b>	<b>X</b>
<b>Options</b>	1 Form A	66	B, C, D, E	500*	W
		51**	C, D, E		
	1 Form B 1 Form C	90			

\* Other cable length available.  
 \*\* Not available in combination with MK7/1 Sfferies.

**MAGNETIC SENSITIVITY**

Sensitivity Class	Pull In at Range
B	10 - 15
C	15 - 20
D	20 - 25
E	25 - 30

**TERMINATION**

For wire and termination details please consult factory.  
 Form C version requires 3 conductors.

<b>W</b>		The cable cut length includes: 5 mm of wire stripped and tinned
----------	---	--

**CONTACT DATA**

All Data at 20° C	Switch Model → Contact Form →	Switch 51 Form A			Switch 66 Form A			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
<b>Contact Ratings</b>	<b>Conditions</b>							
Switching Power	Any DC combination of V & A not to exceed their individual max.'s			12			10	W
Switching Voltage	DC or peak AC			250			200	V
Switching Current	DC or peak AC			0.5			0.5	A
Carry Current	DC or peak AC			1.5			1.25	A
Static Contact Resistance	w/ 0.5 V & 10mA			150			150	mΩ
Dynamic Contact Resistance	Measured w/ 0.5 V & 50mA , 1.5 ms after closure			200			200	mΩ
Insulation Resistance across Contacts	100 volts applied	10 <sup>11</sup>			10 <sup>10*</sup>			Ω
Breakdown Voltage across Contact	Voltage applied for 60 sec. min.	350			225 *			VDC
Operation Time incl. Bounce	Measured w/ 100 % overdrive			1.0			0.5	ms
Release Time	Measured w/ no coil suppression			0.1			0.1	ms
Capacitance	at 10 kHz cross contact		0.2			0.2		pF
<b>Contact Operation **</b>								
Must Operate Condition	Steady state field	15		30	10		30	AT
Must Release Condition	Steady state field	6		27	4		27	AT
<b>Environmental Data</b>								
Shock Resistance	1/2 sinus wave duration 11 ms			50			50	g
Vibration Resistance	From 10 - 2000 Hz			20			20	g
Ambient Temperature	10°C/ minute max. allowable	-20		85	-20		85	°C
Stock Temperature	10°C/ minute max. allowable	-35		85	-35		85	°C
Soldering Temperature	5 sec. dwell			260			260	°C
Please note: The indicated electrical data are maximum values and can vary downwards when using a more sensitive switch. * Insulation resistance of 10 <sup>12</sup> and breakdown voltage of 480 VDC is available. ** These ranges refer to the uncut / unmodified Reed Switches described in our Reed Switch section. Consult factory if more detail is required.								

**CONTACT DATA**

<b>All Data at 20° C</b>	<b>Switch Model → Contact Form →</b>	<b>Switch 90 Form B / C</b>			
<b>Contact Ratings</b>	<b>Conditions</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Units</b>
Switching Power	Any DC combination of V & A not to exceed their individual max.'s			3	W
Switching Voltage	DC or peak AC			175	V
Switching Current	DC or peak AC			0.25	A
Carry Current	DC or peak AC			1.2	A
Static Contact Resistance	w/ 0.5 V & 10mA			150	mΩ
Dynamic Contact Resistance	Measured w/ 0.5 V & 50mA , 1.5 ms after closure			250	mΩ
Insulation Resistance across	100 volts applied	10 <sup>9</sup>			Ω
Breakdown Voltage across Contact	Voltage applied for 60 sec. min.	200			VDC
Operation Time incl. Bounce	Measured w/ 100 % overdrive			0.7	ms
Release Time	Measured w/ no coil suppression			1.5	ms
Capacitance	at 10 kHz cross contact		1.0		pF
<b>Contact Operation *</b>					
Must Operate Condition	Steady state field	15		35	AT
Must Release Condition	Steady state field	6		27	AT
<b>Environmental Data</b>					
Shock Resistance	1/2 sinus wave duration 11 ms			50	g
Vibration Resistance	From 10 - 2000 Hz			20	g
Ambient Temperature	10°C/ minute max. allowable	-20		85	°C
Stock Temperature	10°C/ minute max. allowable	-35		85	°C
Soldering Temperature	5 sec. dwell			260	°C
Please note: The indicated electrical data are maximum values and can vary downwards when using a more sensitive switch. * These ranges refer to the uncut / unmodified Reed Switches described in our Reed Switch section. Consult factory if more detail is required.					