MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH-BASIC

CATALOG LISTING
11SM1

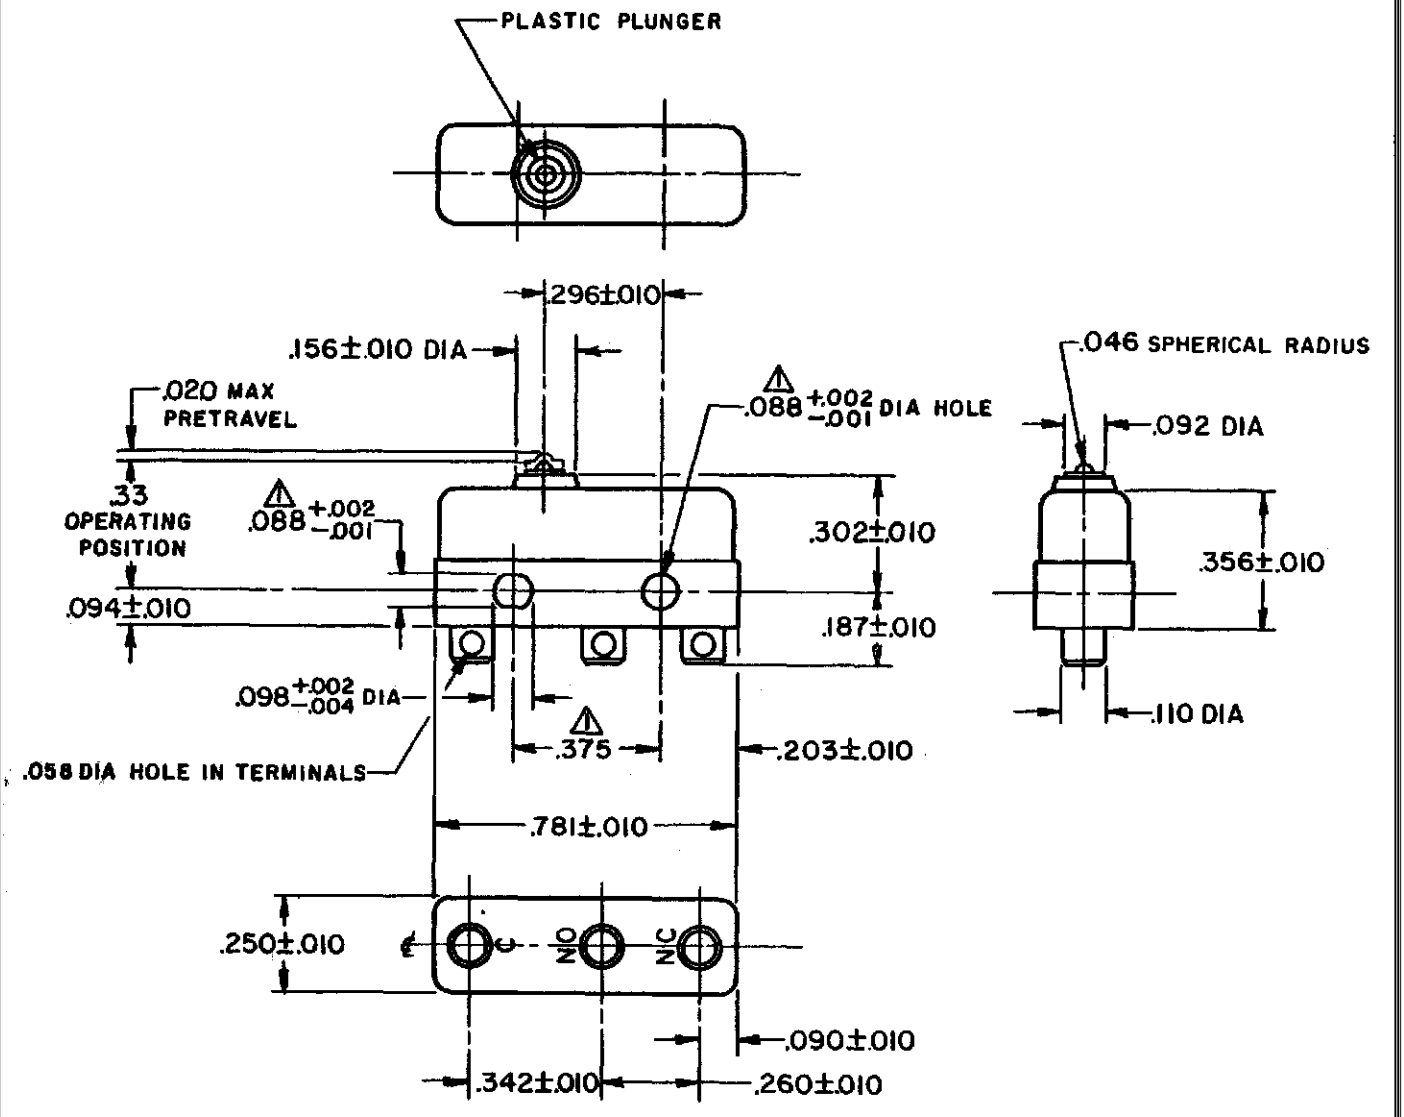

NOTE—
⚠-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
2-TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE — — — — — — 3–5 OZ	CONTACT ARRANGEMENT: S P D T
RELEASE FORCE — — — — — — — — 1 OZ MIN	30 VOLTS DC RATING
DIFFERENTIAL TRAVEL — — — .004 MAX	INDUCTIVE — — — — SEA LEVEL — — — 3 AMP; 50,000 FT — — 2.5 AMP
OVERTRAVEL — — — — — — — — — .005 MIN	RESISTIVE — — — — SEA LEVEL — — — 5 AMP; 50,000 FT — — — 5 AMP
	MAXIMUM INRUSH — — — — — — — — 24 AMP
	L4 5A 250 VAC ~

SCALE 2:1 — DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .006 LB MAX

CATALOG LISTING 11SM1 PAGE 1 OF 1
ISSUE 10 M
REPLACES
RELEASE NO.
CHECK

REVISIONS

A	C022077	GCH 1 DEC 66
B	CO-77768	SAD 12 JUL 94
C	CO-82803-E	DLT 7 JAN 97

CHECK
CHECK 21 DEC 96
CHECK LSD
DRAWN GCH 1 DEC 66
FORMTEK