

11SM401

M

DRAWING NUMBER

X8

ISSUE

REPLACES

SR 8912

RELEASE NO.

CHECK

REVISIONS

A	C083734	JAK	12 DEC 96
B	C0-82803-E	DLT	7 DEC 97

CHECK

22 APR 60

DAW

60

CHECK


APR 60

15

Y O

FORMTEK

DRAWN

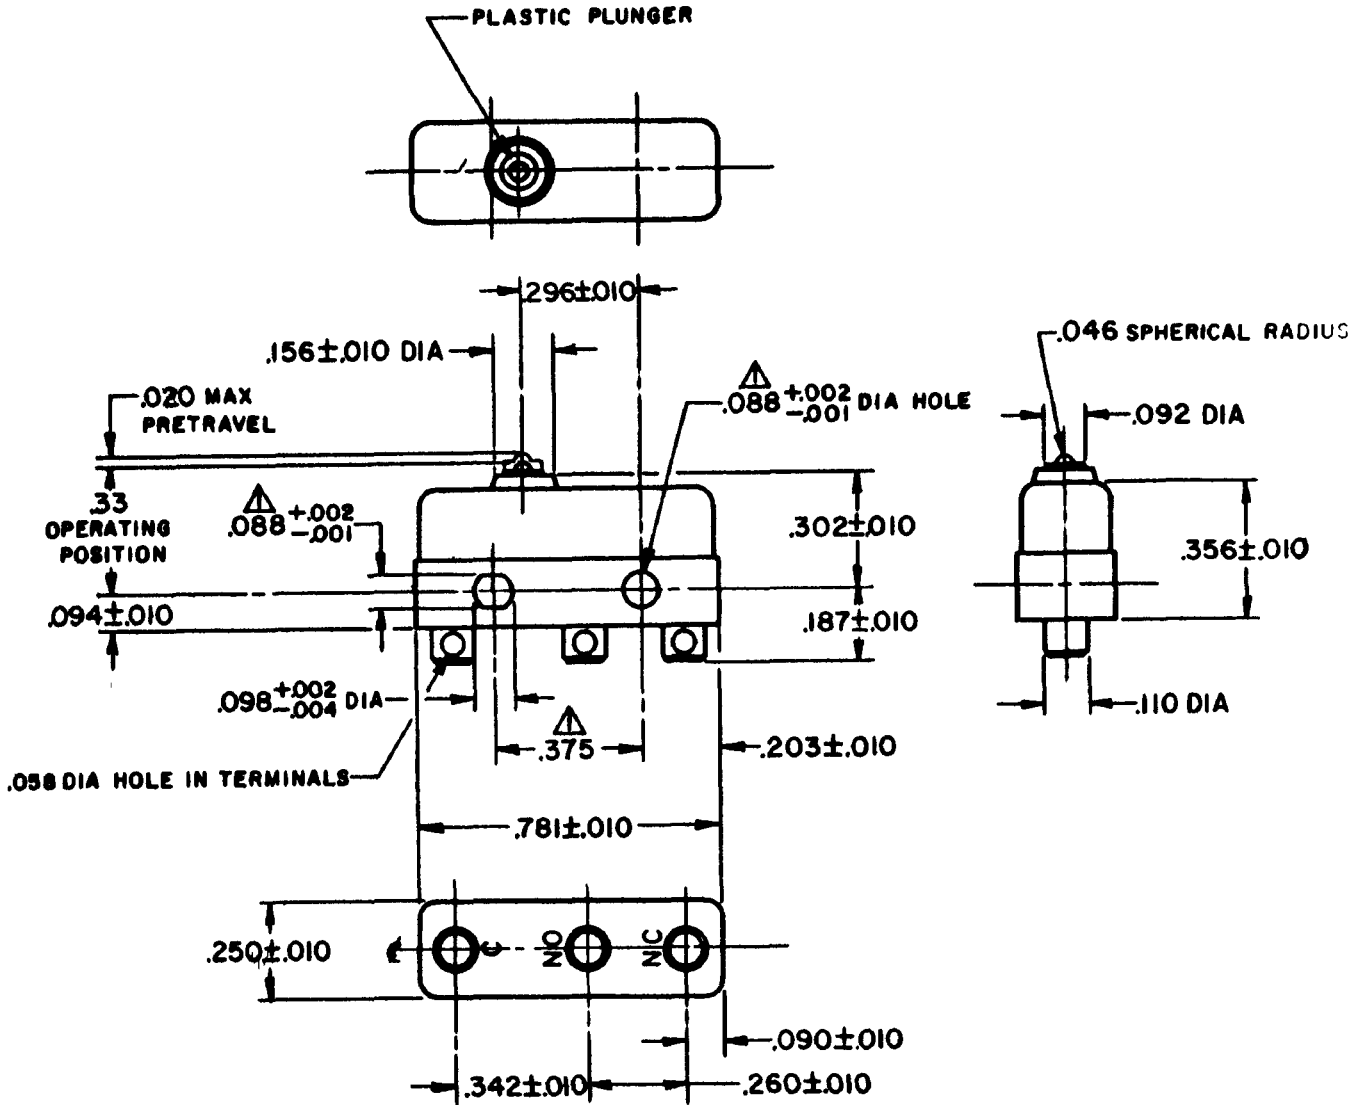

NOTE-

- △-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
- 2-TERMINALS ARE PLATED FOR SOLDERING
- 3-DEAD BREAK CONDITIONS:
 - A - MAX AMOUNT PERMISSIBLE ----- .0002 IN.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE --- 3 1/2 OZ MAX
 RELEASE FORCE ----- 1 OZ MIN
 DIFFERENTIAL TRAVEL --- .001 MAX
 OVERTRAVEL ----- .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
 SPDT

BREAK DISTANCE
 .008 MIN

UNDERWRITERS' LAB. INC. LISTED RATING

-L4- 5 A - 250 VAC

SCALE 2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
 ONE PLACE (.0) ± .030
 TWO PLACE (.00) ± .015
 THREE PLACE (.000) ± .005
 ANGLES ±

WEIGHT .006 LB MAX

