MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

ASSEMBLY-SWITCH

CATALOG LISTING
2AC60
KC-B0600

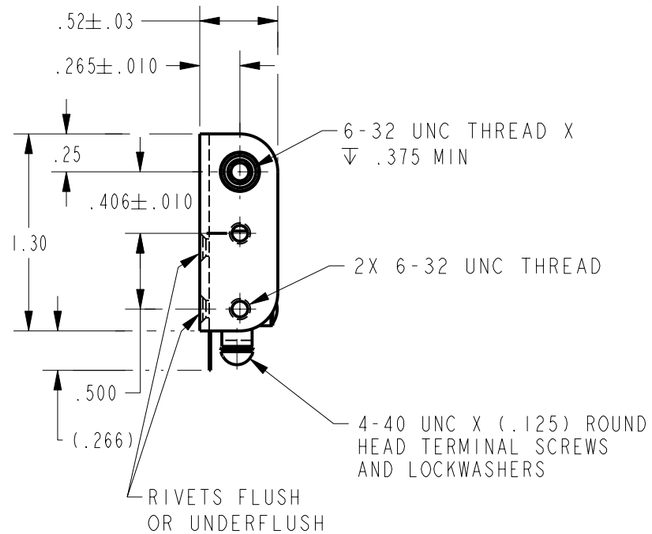

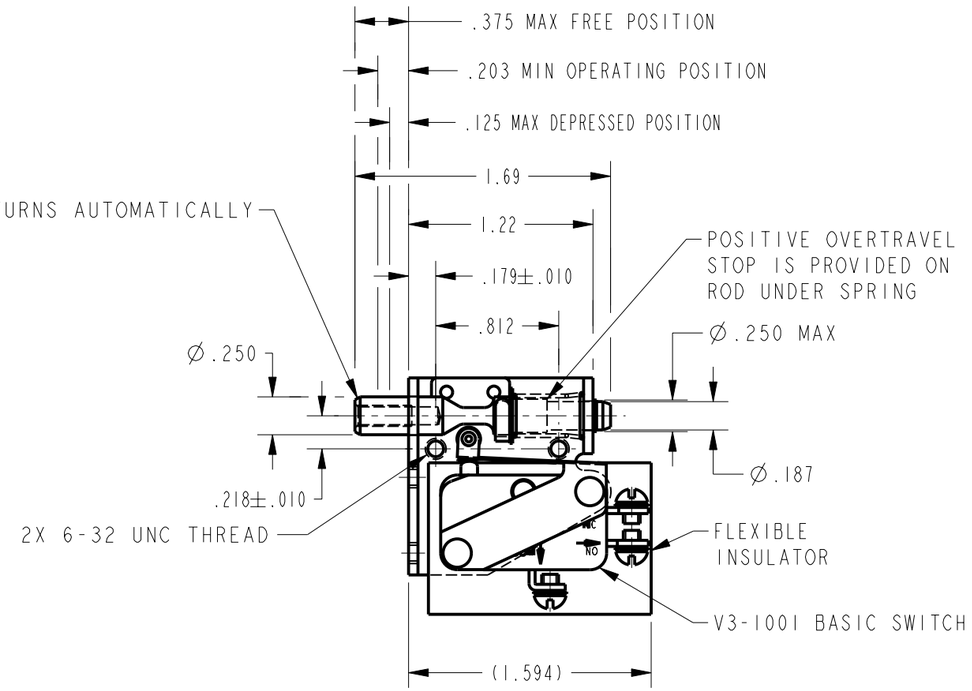

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS	ELECTRICAL DATA
TOTAL TRAVEL ———— .250 APPROX PUSH DIRECTION	CONTACT ARRANGEMENT S P D T
FULLY DEPRESSED FORCE ————— 4 LBS MAX	

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

ANSI Y14.5M-1982 APPLIES

NOTES
1 - PLASTIC PARTS ARE MADE OF DIALLYL PHTHALATE
2 - WITH ROD IN EITHER ACTUATED POSITION, BASIC SWITCH PLUNGER MUST HAVE .010 MIN OVERTRAVEL AND WITH ROD IN FREE POSITION BASIC SWITCH PLUNGER MUST HAVE .005 MIN RELEASE TRAVEL

REVISIONS

A	RE-INST PR24263	TSM	25OCT99

PTC/CAD 2D
DRAWN TSM 25OCT99 CHECK SAV 25OCT99 CHECK CHECK

CATALOG LISTING 2AC60
ISSUE 6 PAGE 1 OF 1
RELEASE NO. PR-5457
REPLACES