MICRO SWITCH
FREEPORT ILLINOIS
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
BZ-2RW8244-A2

DRAWING NUMBER BZ-2RW8244-A2 PAGE 1 OF 1
ISSUE M 7
RELEASE NO.
REPLACES

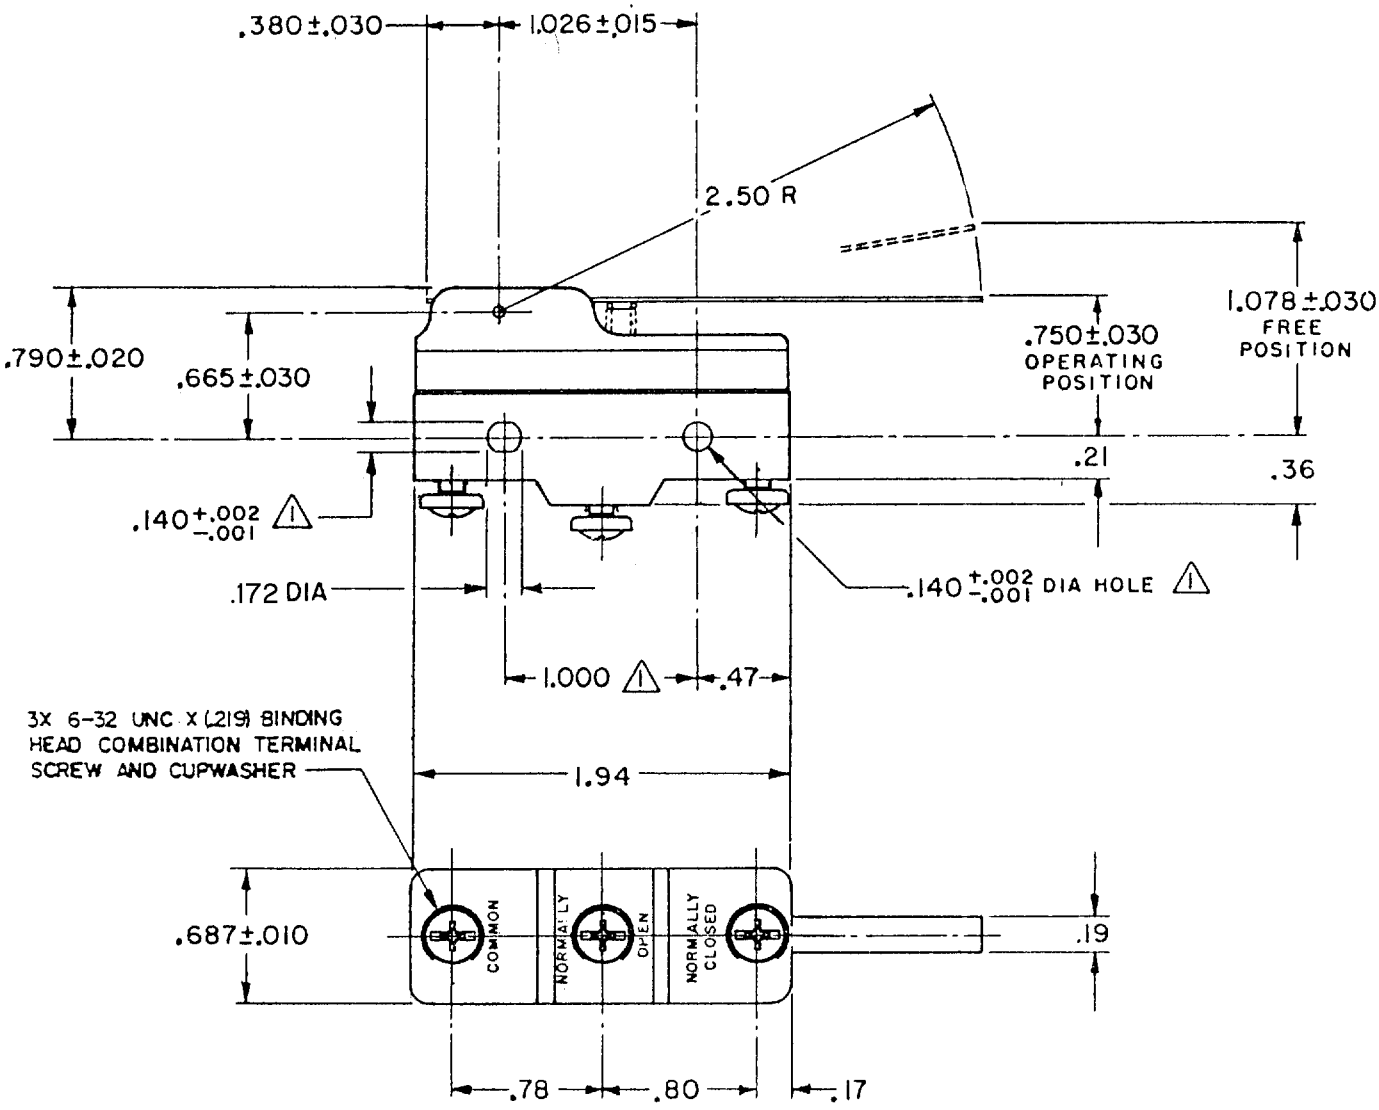

NOTES
⚠ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ±.002 CENTERS
2 - SWITCH WILL WITHSTAND TEMPERATURE OF 400° F. FOR 100 HOURS

REVISIONS

A	C017262	G C H 20 NOV 62
B	C021530	W E G 22 AUG 66
C	CO-73287-D	K D R 8 JULY 93
D	C093346	D L T 28 AUG 98
E	CO-95953	J J A 18 JAN 00

CHECK
DAW 28 NOV 62
CHECK
DRAWN G C H 20 NOV 62
FORMTEK FO-50378

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ---- 2 1/2 OZ MAX
RELEASE FORCE ------ 1/2 OZ MIN
DIFFERENTIAL TRAVEL ---- .007 -.050
OVERTRAVEL ---------- .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UNDERWRITERS' LAB. INC. LISTED RATING
-L35- 5 A-125, 250 OR 480 VAC
1/2 A-125 VDC; 1/4 A-250 VDC
-L288-

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .073 LB