MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH–BASIC

CATALOG LISTING
DT–2RV–A7

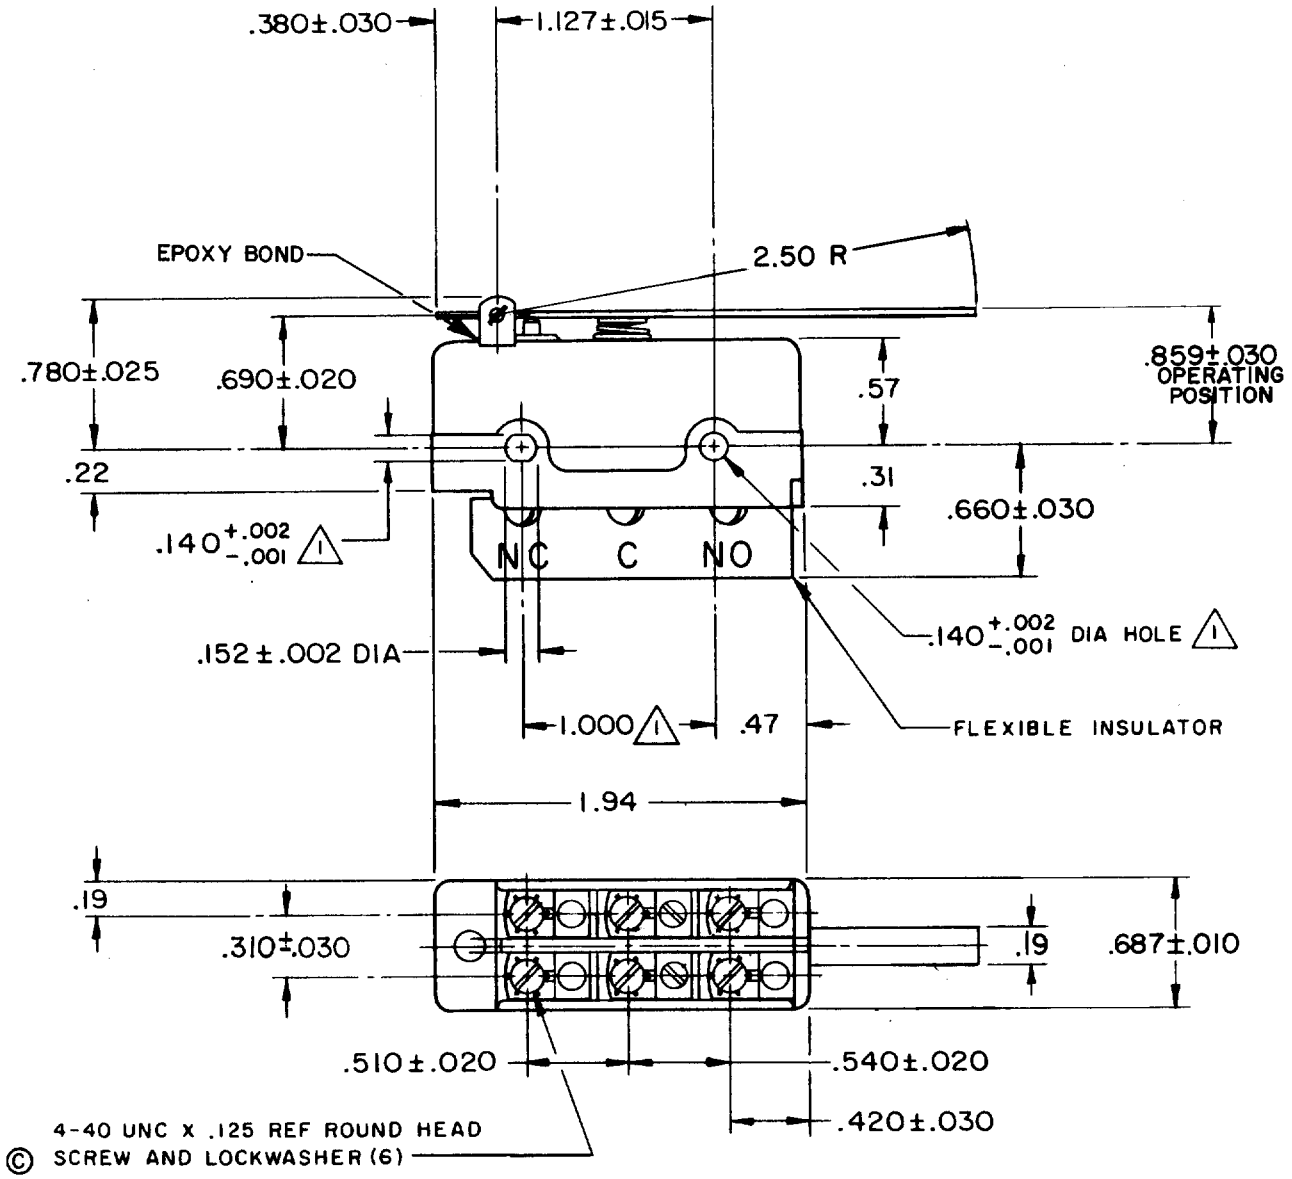

NOTE–
(1) MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE	3 1/2–6 OZ
RELEASE FORCE	1 OZ MIN
PRETRAVEL	1.110 MAX
DIFFERENTIAL TRAVEL	.490–.755
OVERTRAVEL	.062 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
D P D T

UL LISTED-FILE E12252
CODE L59
10A-125 OR 250 VAC
0.3A-125 VDC; 0.15A-250 VDC

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .080 LB

M DT–2RV–A7

DRAWING NUMBER

ISSUE 13

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	C017725	L E B 10 JUNE 63
B	C017725	L E B 28 AUG 63
C	C024941	M B S 2 DEC 68
D	C026075	M B S 26 AUG 69
E	C037528	C J H 31 AUG 76
F	C038280	K P K 30 MAR 77
G	CO 39046	G A S 16 SEPT 77
H	C061634	TSK 17 JUL 87

CHECK L S D 19 JUN 63

CHECK

DRAWN L E B 10 JUNE 63

FO-50378