
# Data sheet
## RP02907IBWC Type 007


P/N
31007207

2025/06/30

## Illustrations

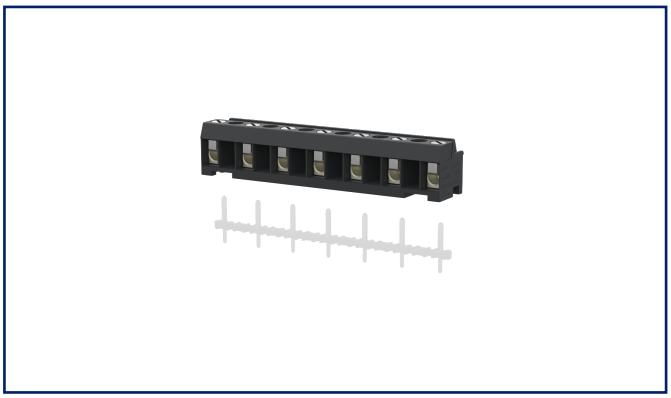

Dimensional drawing as an example

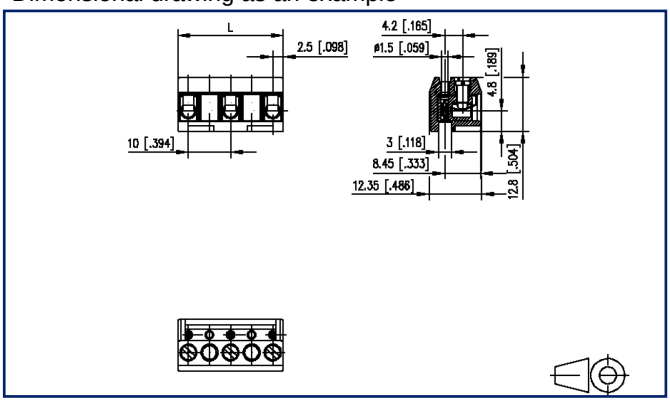


See enlarged drawings at the end of document

## Product specification

- screw type terminal block, pluggable
- centerline 10.00 mm, direction of connection 90°
- wire protector, fittable without loss of poles
- color black

METZ CONNECT GmbH | Im Tal 2 | 78176 Blumberg | Germany
Phone +49 7702 533-0 | Fax +49 7702 533-433
Weitere Dokumentation siehe / additional documentation see /
documentation supplémentaire voir www.metz-connect.com

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

**Data sheet**
**RP02907IBWC Type 007**



**P/N 31007207**

2025/06/30

## Technical Data

| | | | |
|---|---|---|---|
| **General Data** | | | |
| Tightening torque SEV | 0.5 Nm | | |
| Tightening torque UL | 4.4 lb-in | | |
| pole size | 7 | | |
| Insulating material class | CTI 600 | | |
| clearance/creepage dist. | 7.3 mm | | |
| Protection category | IP20 | | |
| Insul. strip length | 6 mm | | |
| Rated current | 16 A | | |
| Overvoltage category | III | III | II |
| Pollution degree | 3 | 2 | 2 |
| Rated voltage | 500 V | 1000 V | 1000 V |
| Rated test voltage | 6 kV | 6 kV | 6 kV |
| **Terminal data** | | | |
| rat.wiring solid AWGmax | 0.33 mm² - 2.5 mm² / AWG 22 - AWG 12 | | |
| rat.wiring strand.AWGmax | 0.33 mm² - 2.5 mm² / AWG 22 - AWG 12 | | |
| **Approvals** | | | |
| extended wiring UL | Wire range extended to No. 30 AWG for factory-wiring. Two same size wires No. 22-16 AWG Cu, Sol/Str for field-wiring; No. 30-16 AWG Cu Sol/Str factory-wiring. | | |
| c UL us V / A / AWG | 600 / 15 / 22 - 12 | | |
| approval UL - File No. | E121004 | | |
| SEV | 630 V / 6 kV / 10 A | | |
| **Material** | | | |
| insulating material | PA66 | | |
| flammability class | V0 | | |
| contact material | CuBe | | |
| Contact surface | Ni + Ag | | |
| terminal body thread | M3 | | |
| terminal body material | CuZnPb | | |
| terminal body surface | Cu + Ni | | |
| screw thread | M3 | | |

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

**Data sheet**
**RP02907IBWC Type 007**



**P/N 31007207**

2025/06/30

## Technical Data

| | |
|---|---|
| screw material | 8,8 |
| screw surface | Zn Cr(VI)-frei/free |
| wire protector material | CuSn |
| wire protector surface | Sn |
| Glow-Wire Flammability GWFI | 960 °C acc. to IEC 60695-2-12 |
| Glow-Wire Flammability GWIT | 775 °C acc. to IEC 60695-2-13 |
| **Climatic Data** | |
| upper limit temperature | 105 °C |
| lower limit temperature | -40 °C |
| **general** | |
| Tolerance | ISO 2768 -mH |

### Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

## Accessories

| P/N | Designation |
|---|---|
| 710084 | Mounting flange right for type 07, 08 |
| 710085 | Mounting flange left for type 07, 08 |
| 710121-2 | Coding pin short for type 007 |
| 710122-2 | Coding pin long for type 007 |
| 716846 | Coding comb pastel blue |

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

## Counterpart

| P/N | Designation |
|---|---|
| 310172 | PR019xxVBHC Typ 017 |
| 310272 | PR019xxVBVC Typ 027 |
| 310392 | PT059xxHBHC Typ 039 |
| 310412 | PT069xxVBEN Typ 041 |
| 310422 | PT069xxVBVN Type 042 |

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

**Data sheet**
**RP02907IBWC Type 007**




**P/N**
**31007207**

2025/06/30

## Illustrations

Dimensional drawing as an example

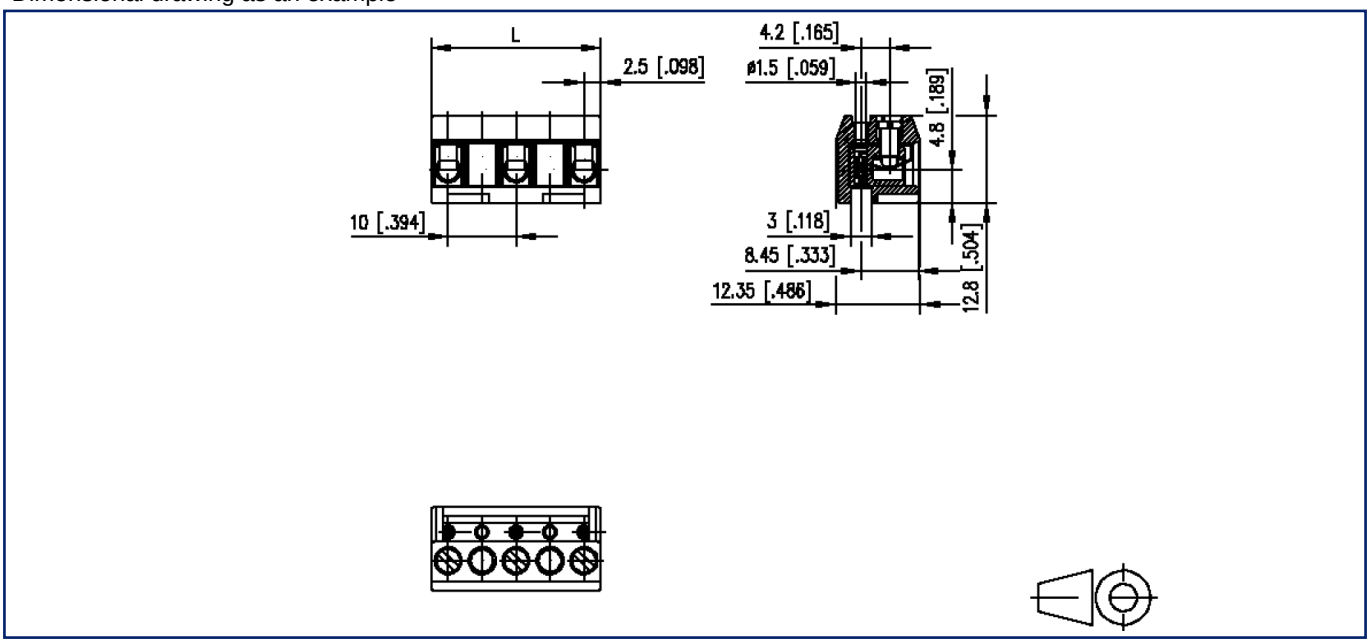


L=(pole size - 1) x centerline + 5 mm [0.197]

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!