

Data sheet

RT139xxHBWC Type 271

Page 1/5

P/N
312712xx

xx=number of poles


2026/01/12

Version: Z


Illustrations



Dimensional drawing as an example

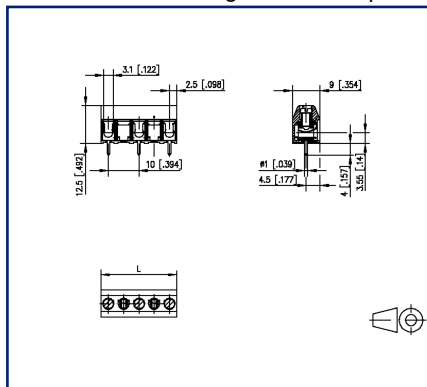

Drill pattern as an example

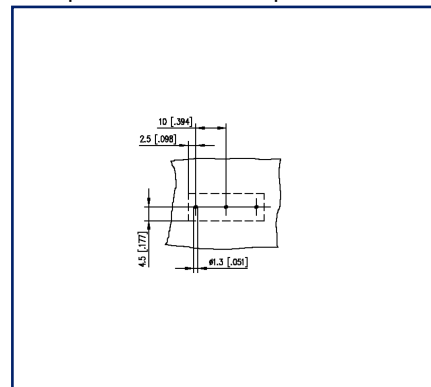

See enlarged drawings at the end of document

Product specification

- screw type terminal block, solderable
- centerline 10.00 mm, direction of connection 90°
- wire protector, fittable without loss of poles
- color black



Data sheet

RT139xxHBWC Type 271

Page 2/5

P/N
312712xx

xx=number of poles

2026/01/12

Version: Z

Technical Data

General Data

Tightening torque SEV	0.5 Nm		
Tightening torque UL	4.4 lb-in		
Solder pin length	4 mm		
min. number of poles	2		
max. number of poles	12		
Insulating material class	CTI 600		
clearance/creepage dist.	8.3 mm		
Protection category	IP20		
Insul. strip length	8 mm		
Rated current	15 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	630 V	1000 V	1000 V
Rated test voltage	8 kV	8 kV	8 kV

Terminal data

rat.wiring solid AWGmax	0.08 mm ² - 4 mm ² / AWG 26 - AWG 14
rat.wiring strand.AWGmax	0.08 mm ² - 2.5 mm ² / AWG 26 - AWG 14

Approvals

 V / A / AWG	300 / 15 / 26 - 14
---	--------------------

approval UL - File No.	E121004
------------------------	---------

 750 V / 24 A / T60	
--	--

Material

insulating material	PA66
flammability class	V0
terminal body thread	M3
terminal body material	CuZnPb
terminal body surface	Ni + Sn
screw thread	M3
screw material	8,8
screw surface	Cu + Ni

Data sheet

Page 3/5

RT139xxHBWC Type 271

P/N

312712xx

xx=number of poles

2026/01/12

Version: Z

Technical Data

wire protector material	CuSn
wire protector surface	Sn
Glow-Wire Flammability GWFI	850 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

general

Tolerance	ISO 2768 -mH
Solderability	Acc. to JEDEC JESD22-B102E 245°C/5s

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

RT139xxHBWC Type 271

Page 4/5

P/N

312712xx


xx=number of poles

2026/01/12

Version: Z

Illustrations

Dimensional drawing as an example

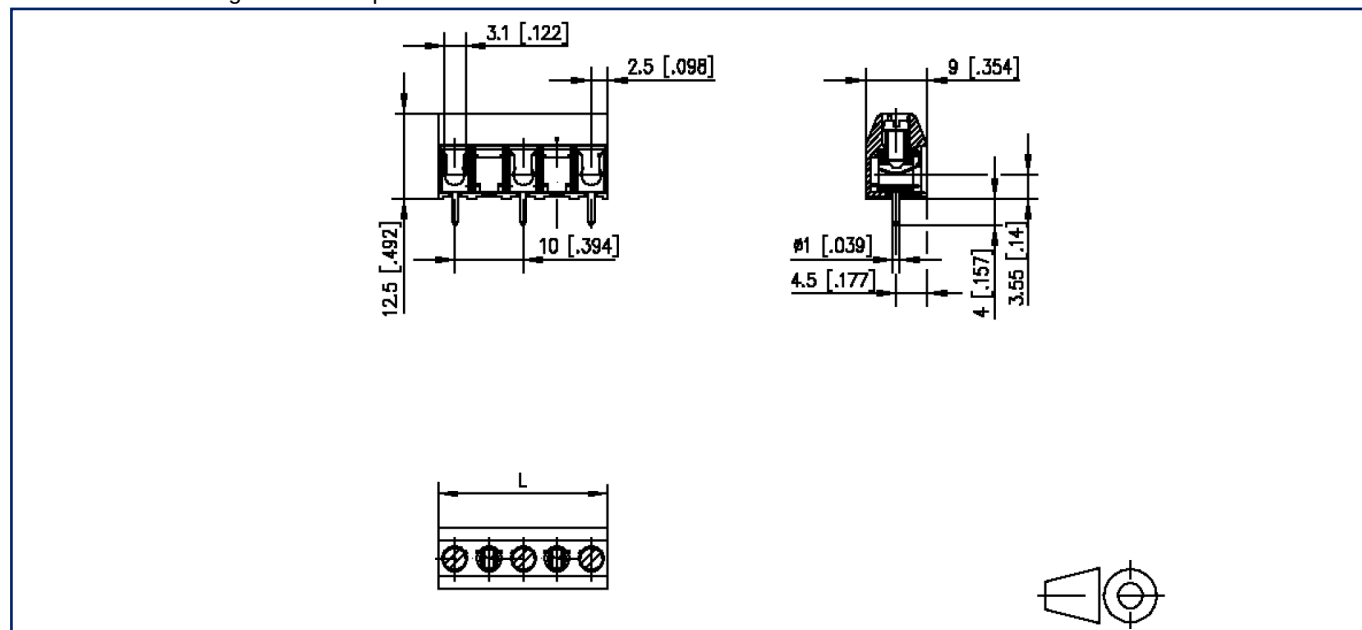

$L = (\text{pole size} - 1) \times \text{centerline} + 5 \text{ mm}$ [0.197]



Data sheet RT139xxHBWC Type 271

Page 5/5

P/N
312712xx

xx=number of poles

2026/01/12

Version: Z

Illustrations

Drill pattern as an example

