

# Data sheet

ST045xxDDNC AST045

Page 1/5

P/N

AST0450504xx


xx=number of poles

2026/04/27


## Illustrations



Dimensional drawing as an example

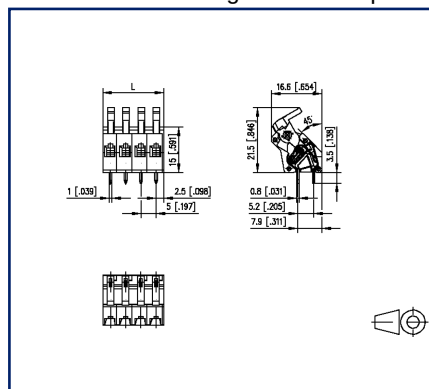

Drill pattern as an example

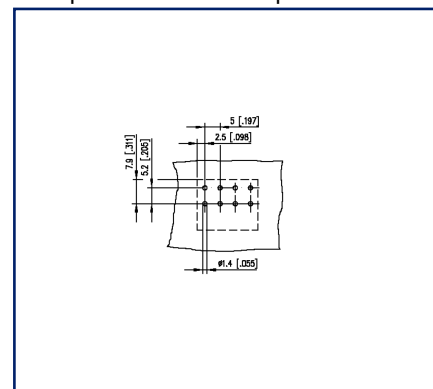

See enlarged drawings at the end of document

## Product specification

- spring clamp terminal block, solderable, double solder pins
- centerline 5.00 mm, direction of connection 45°
- fittable without loss of poles
- color gray
- eccentric lever



# Data sheet

## ST045xxDDNC AST045

Page 2/5

P/N  
AST0450504xx  
xx=number of poles  
2026/04/27

### Technical Data

| General Data                                                                                    |                                     |        |        |
|-------------------------------------------------------------------------------------------------|-------------------------------------|--------|--------|
| Solder pin length                                                                               | 3.5 mm                              |        |        |
| pole size                                                                                       | 5                                   |        |        |
| Insulating material class                                                                       | CTI 400                             |        |        |
| clearance/creepage dist.                                                                        | 4 mm                                |        |        |
| Protection category                                                                             | IP20                                |        |        |
| Insul. strip length                                                                             | 6 mm                                |        |        |
| Rated current                                                                                   | 12 A                                |        |        |
| Overvoltage category                                                                            | III                                 | III    | II     |
| Pollution degree                                                                                | 3                                   | 2      | 2      |
| Rated voltage                                                                                   | 32 V                                | 200 V  | 200 V  |
| Rated test voltage                                                                              | 2.5 kV                              | 2.5 kV | 2.5 kV |
| Terminal data                                                                                   |                                     |        |        |
| rat.wiring solid AWGmax                                                                         | 0.2 mm² - 1.5 mm² / AWG 28 - AWG 16 |        |        |
| rat.wiring strand.AWGmax                                                                        | 0.2 mm² - 1.5 mm² / AWG 28 - AWG 16 |        |        |
| Approvals                                                                                       |                                     |        |        |
|  V / A / AWG | 300 / 13 / 28 - 16                  |        |        |
| approval UL - File No.                                                                          | E121004                             |        |        |
|              | 250 V / 13.5 A / T60                |        |        |
| Material                                                                                        |                                     |        |        |
| insulating material                                                                             | PA                                  |        |        |
| flammability class                                                                              | V0                                  |        |        |
| spring material                                                                                 | Spring steel                        |        |        |
| contact material                                                                                | CuZn                                |        |        |
| Contact surface                                                                                 | Ni + Sn                             |        |        |
| Glow-Wire Flammability GWFI                                                                     | 850 °C acc. to IEC 60695-2-12       |        |        |
| Glow-Wire Flammability GWIT                                                                     | 775 °C acc. to IEC 60695-2-13       |        |        |
| Climatic Data                                                                                   |                                     |        |        |
| upper limit temperature                                                                         | 105 °C                              |        |        |
| lower limit temperature                                                                         | -40 °C                              |        |        |
| general                                                                                         |                                     |        |        |

## Data sheet

Page 3/5

## ST045xxDDNC AST045

P/N

AST0450504xx

xx=number of poles

2026/04/27

**Technical Data**

|               |                                     |
|---------------|-------------------------------------|
| Tolerance     | ISO 2768 -mH                        |
| Solderability | Acc. to JEDEC JESD22-B102E 245°C/5s |

**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



## Data sheet

## ST045xxDDNC AST045

Page 4/5

P/N


AST0450504xx

xx=number of poles

2026/04/27

## Illustrations

Dimensional drawing as an example

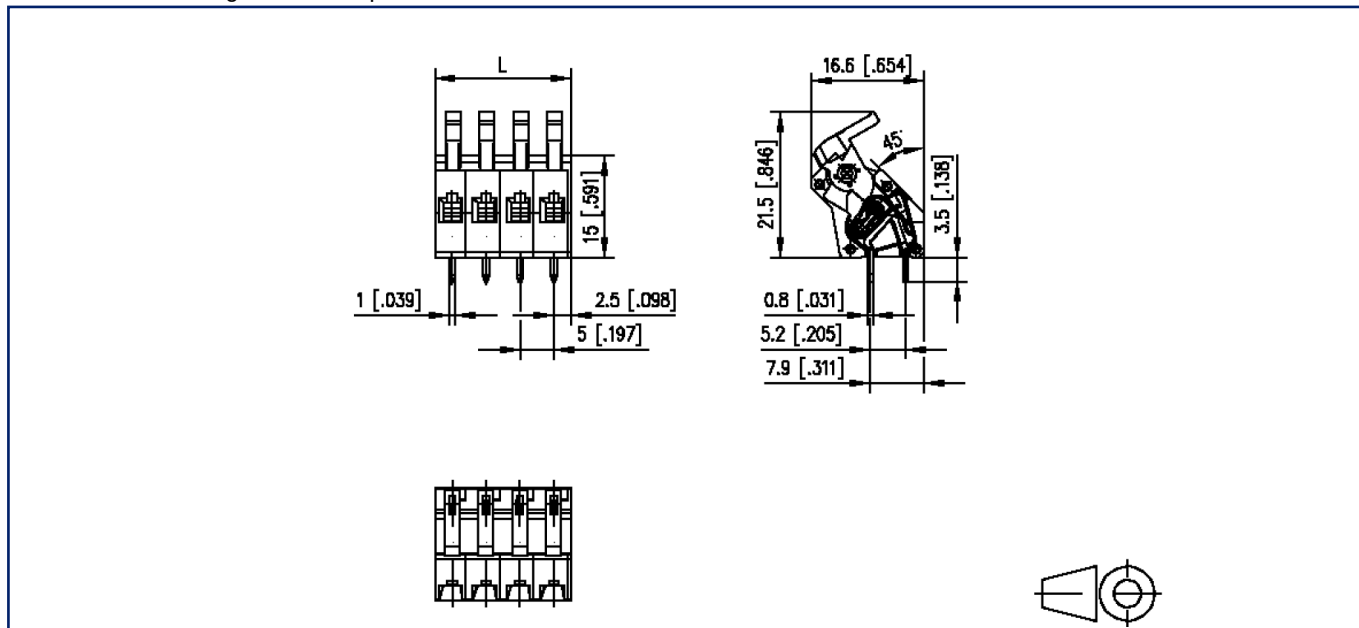

$L = (\text{pole size} - 1) \times \text{centerline} + 5 \text{ mm} [0.197]$



# Data sheet ST045xxDDNC AST045

Page 5/5

P/N  
AST0450504xx  
xx=number of poles  
2026/04/27

## Illustrations

Drill pattern as an example

