


## Data sheet

PC board insert M12, D-coded, 4-pole, green,  
Tape & Reel


Page 1/5

P/N  
MMT060A115-G2  
EAN 4251394619101  
2024/11/06  
Version: P


### Illustrations

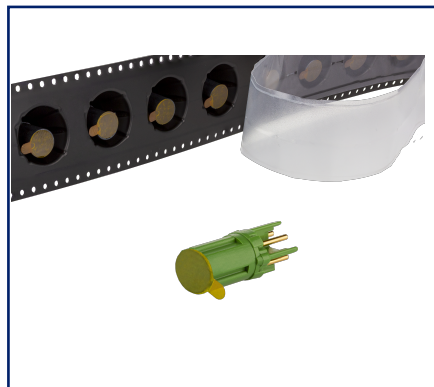

Dimensional drawing

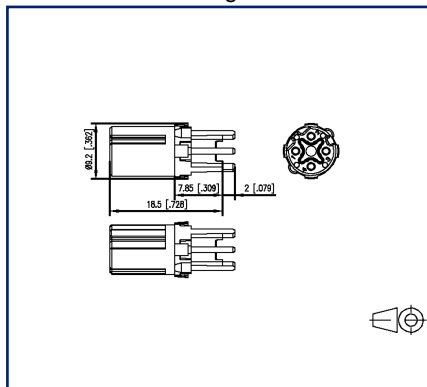

Drill pattern

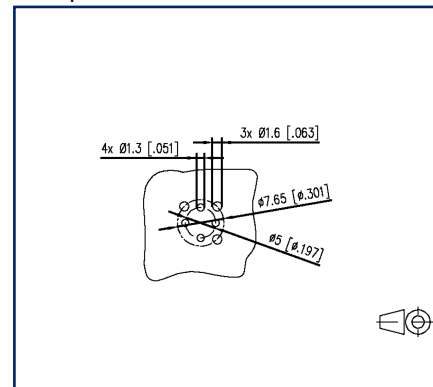

See enlarged drawings at the end of document

### Product specification

- PC board insert M12
- Cat.5
- 4-pole, D-coded
- suitable for 10/100 MBit
- THR solderable
- Top entry
- Contact carriers green
- Tape & Reel packaging
- suitable for applications in the railway industry according to data sheet



## PC board insert M12, D-coded, 4-pole, green, Tape & Reel

P/N  
MMT060A115-G2  
EAN 4251394619101  
2024/11/06  
Version: P

### Technical Data

#### General Data

##### Dimensions

Dimension (D x H)	Ø 9.2 mm x 20.5 mm
Dimension (D x H)	0.362 in. x 0.807 in.
Ports	Single port
Coding	D-coded

#### Electrical characteristics

Rated voltage	250 V
Effective value of the withstand voltage	1.4 kV
Current carrying capacity at 40 °C	4 A
Insulation resistance	min. 100 MOhm
Overvoltage category	II
Degree of pollution	2

#### Mechanical data

##### Material

Material - Contact	CuZnPb
Contact surface	Ni + Au
Material - Insulating body	PA UL94 V0
Color	green
Life - Number of mating cycles	>= 100

#### Climatic properties

Temperature - Operating °C	-40 °C - 85 °C
Temperature - Operating °F	-40 °F - 185 °F

#### Approvals

Approval mark UL/CSA	E305050
----------------------	---------

#### Packaging

Type of packaging	160 pc(s) / Tape & Reel
-------------------	-------------------------



# U | Contact

Data sheet

Page 3/5

**PC board insert M12, D-coded, 4-pole, green,  
Tape & Reel**

**P/N**  
**MMT060A115-G2**  
**EAN 4251394619101**  
2024/11/06  
Version: P

## Technical Data

### Standards/Regulations

Railway applications

Electronic equipment used on rolling stock	following to DIN EN 50155
Fire protection on railway vehicles	following to DIN EN 45545-2

### Classifications

ETIM 7.0	EC002637
ETIM 8.0	EC002637
ETIM 9.0	EC002637

### Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



# U | Contact

Data sheet


Page 4/5

**PC board insert M12, D-coded, 4-pole, green,  
Tape & Reel**


P/N  
MMT060A115-G2  
EAN 4251394619101  
2024/11/06  
Version: P

## Illustrations

Dimensional drawing

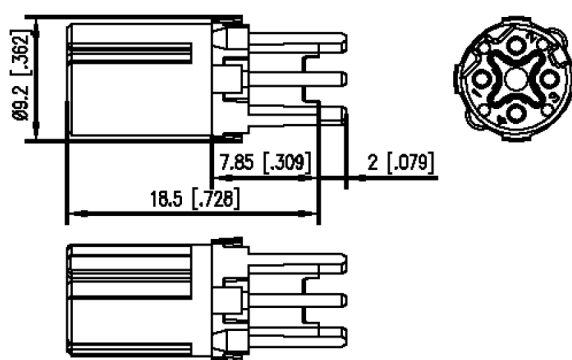

Drill pattern

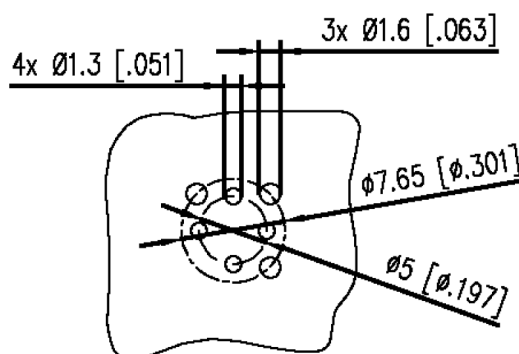

# U | Contact

Data sheet

Page 5/5

**PC board insert M12, D-coded, 4-pole, green,  
Tape & Reel**

P/N  
MMT060A115-G2  
EAN 4251394619101  
2024/11/06  
Version: P

## Illustrations

Snap-in geometry

