

Data sheet

RP019xxVBLC Typ 349

Page 1/6

P/N

313492xx

xx=number of poles



2022/04/05

Version: S

Illustrations



Dimensional drawing

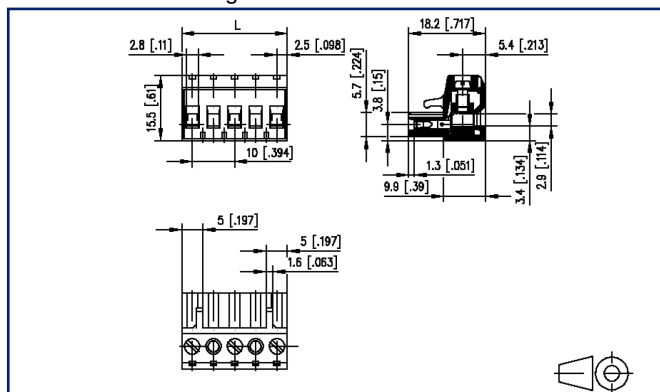

See enlarged drawings at the end of document

Product specification

- screw type terminal block, pluggable
- centerline 10.00 mm, direction of connection vertical 0°
- lift system, fittable without loss of poles
- color black



Data sheet

RP019xxVBLC Typ 349

Page 2/6

P/N
313492xx

xx=number of poles

2022/04/05

Version: S

Technical Data

General Data			
Tightening torque SEV	0.5 Nm		
Tightening torque UL	4.4 lb-in		
min. number of poles	2		
max. number of poles	12		
Insulating material class	CTI 600		
clearance/creepage dist.	8.6 mm		
Protection category	IP20		
Min. insul. strip length	8 mm		
Rated current	12 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	160 V	400 V	400 V
Rated test voltage	2.5 kV	2.5 kV	2.5 kV
Terminal data			
rat.wiring solid AWGmax	0.08 mm² - 4 mm² / AWG 28 - AWG 12		
rat.wiring strand.AWGmax	0.08 mm² - 2.5 mm² / AWG 28 - AWG 12		
Approvals			
extended wiring UL	2 AWG 16-18, or 1 AWG 16 stranded with 1 AWG 18 solid, or 1 AWG 16 stranded with 1 AWG 18 stranded		
 V / A / AWG	600 / 16 / 28 - 12		
approval UL - File No.	E121004		
 2.5 mm²	630 V / 6 kV / 13.5 A		
Material			
insulating material	PA66		
flammability class	V0		
contact material	CuSn		
Contact surface	Sn		
terminal body thread	M3		
terminal body material	CuZnPb		
terminal body surface	Ni		
screw thread	M3		
screw material	8,8		
screw surface	Zn Cr(VI)-frei/free		

U | Contact

Data sheet
RP019xxVBLC Typ 349

Page 3/6

P/N
313492xx

xx=number of poles

2022/04/05

Version: S

Technical Data

Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13
REACH	compliant
REACH - substance (SVHC)	Lead / 7439-92-1

Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

general

Tolerance	ISO 2768 -mH
-----------	--------------



U | Contact

Data sheet

Page 4/6

RP019xxVBLC Typ 349

P/N

313492xx**xx=number of poles**

2022/04/05

Version: S

Accessories

P/N	Designation
700025-01-9	Coding star white with a group of 6 coding pins



U | Contact

Data sheet

Page 5/6

RP019xxVBLC Typ 349

P/N

313492xx**xx=number of poles**

2022/04/05

Version: S

Counterpart

P/N	Designation
311762	PR069xxHBBN Typ 176
311772	PR069xxVBBN Typ 177
313192	PT119xxVBEC Typ 319
313202	PT119xxVBBN Typ 320
313292	PT119xxHBEC Typ 329
313302	PT119xxHBBN Typ 330

U | Contact

Data sheet

RP019xxVBLC Typ 349

Page 6/6

P/N

313492xx


xx=number of poles

2022/04/05

Version: S

Illustrations

Dimensional drawing

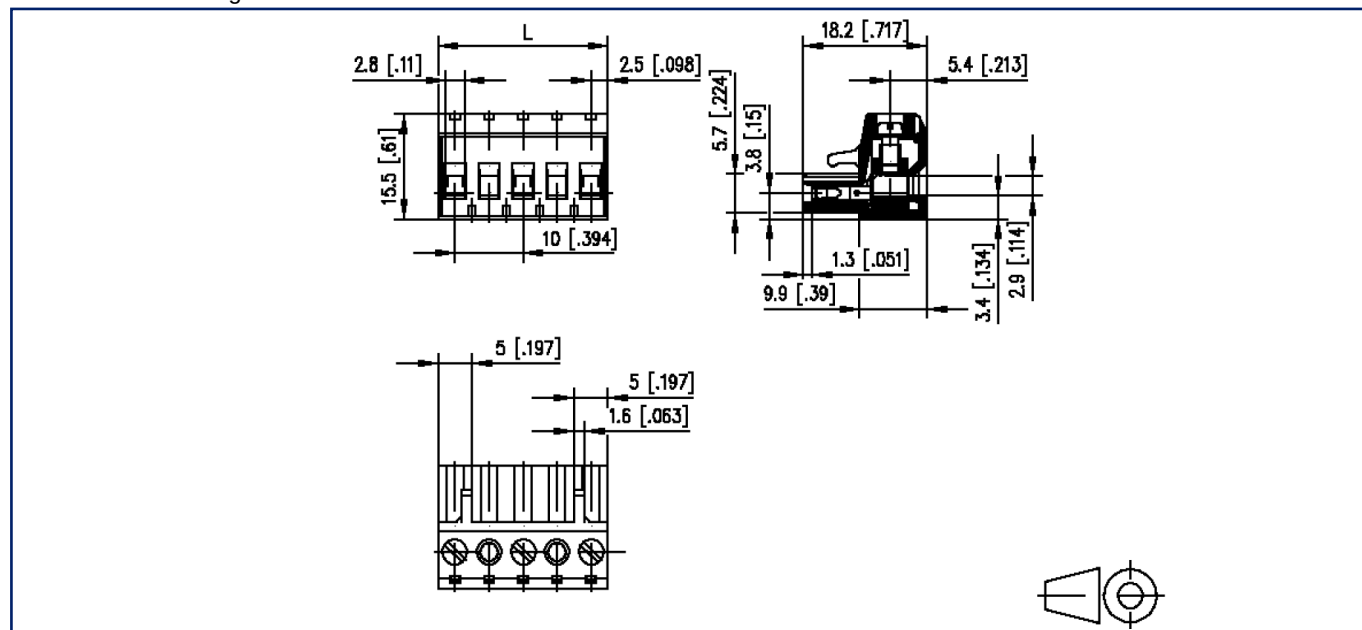

$L = (\text{pole size} - 1) \times \text{centerline} + 5 \text{ mm } [0.197]$

