

Data sheet

RT059xxHBLC Typ 011

Page 1/5

P/N
310112xx

xx=number of poles


2022/04/05

Version: W


Illustrations



Dimensional drawing

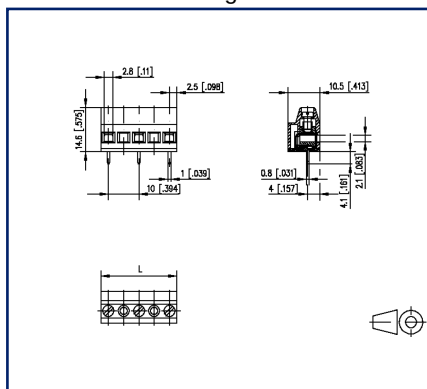

Drill pattern

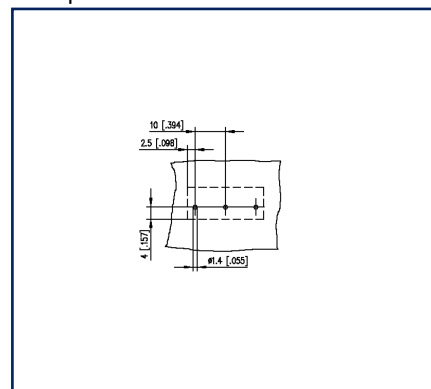

See enlarged drawings at the end of document

Product specification

- screw type terminal block, solderable
- centerline 10.00 mm, direction of connection 90°
- lift system, fittable without loss of poles
- color black



U | Contact

Data sheet RT059xxHBLC Typ 011

Page 2/5

P/N
310112xx

xx=number of poles

2022/04/05

Version: W

Technical Data

General Data

Tightening torque SEV	0.5 Nm		
Tightening torque UL	4.4 lb-in		
Solder pin length	4.1 mm		
min. number of poles	2		
max. number of poles	8		
Insulating material class	CTI 600		
clearance/creepage dist.	8.9 mm		
Protection category	IP20		
Min. insul. strip length	7 mm		
Rated current	13 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	500 V	1000 V	1000 V
Rated test voltage	6 kV	6 kV	6 kV

Terminal data

rat.wiring solid AWGmax	0.34 mm ² - 2.5 mm ² / AWG 28 - AWG 12
rat.wiring strand.AWGmax	0.34 mm ² - 2.5 mm ² / AWG 28 - AWG 12

Approvals

 V / A / AWG	600 / 15 / 22 - 12
approval UL - File No.	E121004
 1.5 mm ²	500 V / 17.5 A / T60

Material

insulating material	PA66
flammability class	V0
contact material	CuZnPb
Contact surface	Ni + Sn
terminal body thread	M3
terminal body material	CuZnPb
terminal body surface	Ni
screw thread	M3
screw material	10,9
screw surface	Zn Cr(VI)-frei/free

U | Contact

Data sheet

RT059xxHBLC Typ 011

Page 3/5

P/N

310112xx

xx=number of poles

2022/04/05

Version: W

Technical Data

Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13
REACH	compliant
REACH - substance (SVHC)	Lead / 7439-92-1

Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

general

Tolerance	ISO 2768 -mH
Solderability	Acc. to JEDEC JESD22-B102E 245°C/5s



U | Contact

Data sheet

RT059xxHBLC Typ 011

Page 4/5

P/N

310112xx


xx=number of poles

2022/04/05

Version: W

Illustrations

Dimensional drawing

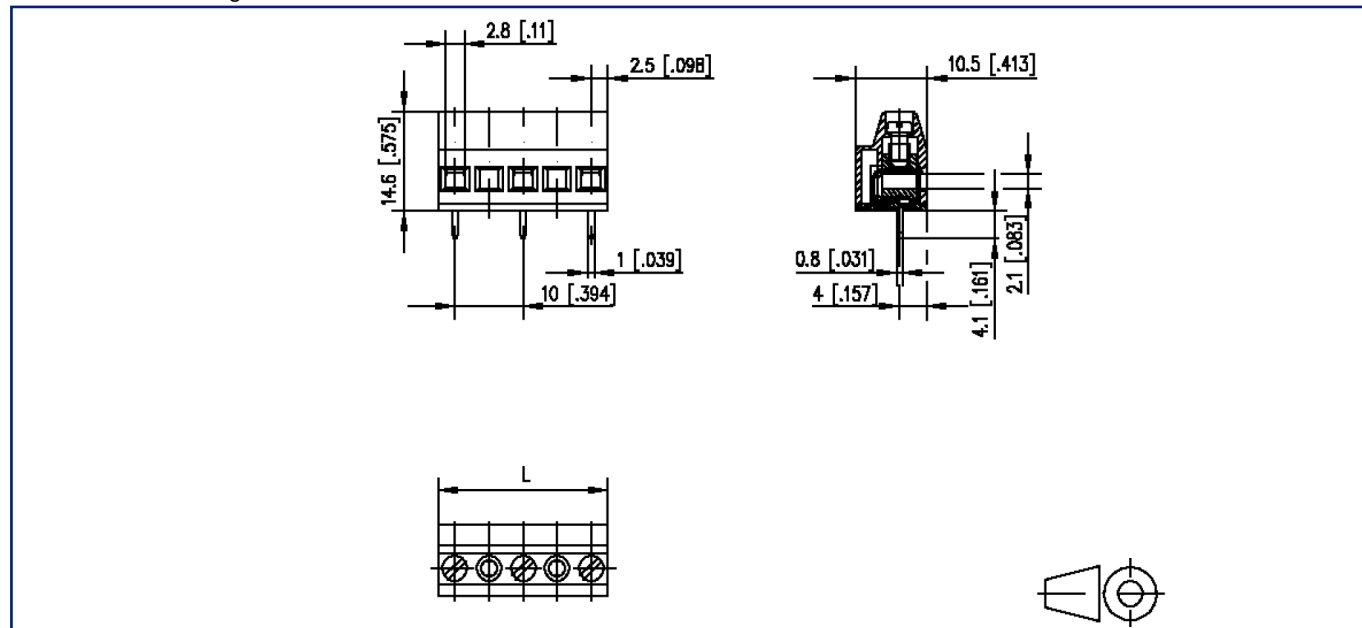

L=(pole size - 1) x centerline + 5 mm [0.197]



U | Contact

Data sheet

RT059xxHBLC Typ 011

Page 5/5

P/N

310112xx

xx=number of poles

2022/04/05

Version: W

Illustrations

Drill pattern

