




# SSIK 6/2A BK

17151.4



M3.5 

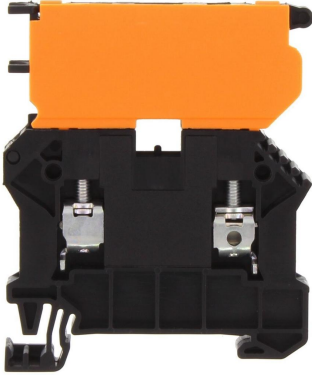

Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 6 mm<sup>2</sup>, Width: 8.1 mm, Colour: Black

## Commercial

### General

Colour: Black

Country of origin: BG

Customs number: 85369010

GTIN (EAN): 4044211188993

Packaging unit: 50

Product description: Fuse-disconnect terminal

Quantity unit: PC

Unit of weight: G

Weight per piece (including packaging): 24.38g

Weight per piece (not including packaging): 23.3g

## Technical

---

### Dimensions

---

Height TS 35/7.5: 70mm

Length: 59mm

Width: 8.1mm

---

### Ratings

---

Contamination degree: 3

Overvoltage category: III

Rated cross-section: 6mm<sup>2</sup>

Rated current (as fuse-disconnect terminal): 10A

Rated impulse voltage: 6kV

Rated voltage (determined by the illuminated display and fuse being used): 500V

---

### Connection data

---

Connection position: Lateral

Connection principle: Screw connection

Connections: 2 / extraction lever

Number of levels: 1

Number of terminals per level: 2

Screw head: Slotted

Screw threading: M 3,5

Stripping length: 10mm

Tightening torque, max.: 1.6Nm

Tightening torque, min.: 0.8Nm

Wire cross-section AWG, max.: 8

Wire cross-section AWG, min.: 22

Wire cross-section single core (rigid)/stranded, max.: 10mm<sup>2</sup>

Wire cross-section single-core (rigid) / stranded, min.: 0.2mm<sup>2</sup>

Wire cross-section stranded with wire-end ferrules, max.: 6mm<sup>2</sup>

Wire cross-section stranded with wire-end ferrules, min.: 0.2mm<sup>2</sup>

Wire cross-section stranded, max.: 10mm<sup>2</sup>

Wire cross-section stranded, min.: 0.2mm<sup>2</sup>

---

### Further technical data

---

Cross-current via illuminated display: < 5mA

End plate required: ✓

Fuse size: 6,3 x 25 / 6,3 x 32mm

---

Gauge plug acc. to EN 60 947-1: A5

Mounting type: Mounting rail TS 35/7,5

Number of cross-connection channels: 2

Power loss in compound arrangement - only short-circuit protection, max.: 2,5 / 2,5W / A

Power loss in compound arrangement - overload and short-circuit protection, max.: 2,5 / 2,5W / A

Power loss in singular arrangement - only short-circuit protection, max.: 4 / 10W / A

Power loss in singular arrangement - overload and short-circuit protection, max.: 2,5 / 2,5W / A

Version of fuse cartridge: G fuse 6.3 x 25 / 6.3 x 32

Version of fuse holder: Swivelling

Voltage fuse: 250V

## Materials

Flammability class UL 94: V-0

Glass-fibre reinforced: ✓

Insulation housing: Polyamide 6.6

Working temperature, max.: 140°C

Working temperature, min.: -40°C

## Approvals

---

### KEMA KEUR approval

KEMA KEUR approval: EN 60947-7-3:2009

KEMA KEUR approval granted: ✓

KEMA fuse size: 6,3 x 25 / 6,3 x 32mm

KEMA power loss in compound arrangement - only short-circuit protection, max.: 2,5 / 2,5W / A

KEMA power loss in compound arrangement - overload and short-circuit protection, max.: 2,5 / 2,5W / A

KEMA power loss in singular arrangement - only short-circuit protection, max.: 4 / 10W / A

KEMA power loss in singular arrangement - overload and short-circuit protection, max.: 2,5 / 2,5W / A

KEMA rated current: 10A

KEMA rated impulse voltage: 6kV

KEMA rated voltage: 500V

KEMA stripping length: 10mm

KEMA torque, max.: 1.6Nm

KEMA torque, min.: 0.8Nm

KEMA voltage fuse, max.: 250V

KEMA wire cross-section single core (rigid), min.: 0.2mm<sup>2</sup>

KEMA wire cross-section single-core (rigid), max.: 10mm<sup>2</sup>

---

KEMA wire cross-section stranded, max.: 10mm<sup>2</sup>

KEMA wire cross-section stranded, min.: 0.2mm<sup>2</sup>

### **UL Recognized**

UL File Number: E95701

UL Recognized: 1

UL Usegroup B: rated current: 10A

UL Usegroup B: rated voltage: 600V

UL Usegroup C: rated current: 10A

UL Usegroup C: rated voltage: 600V

UL Usegroup D: rated current: 10A

UL Usegroup D: rated voltage: 600V

UL approval: UL 1059

UL factory wiring: ✓

UL field wiring: ✓

UL torque, max.: 14.16Lb In.

UL torque, min.: 7.08Lb In.

UL wire cross-section single-core (rigid) AWG, max.: 8

UL wire cross-section single-core (rigid) AWG, min.: 22

UL wire cross-section stranded AWG, max.: 8

UL wire cross-section stranded AWG, min.: 22

UL wire material: Cu

### **CSA approval**

CSA Usegroup C: rated current: 10A

CSA Usegroup C: rated voltage: 600V

CSA approval: C22.2 No 158

CSA approval granted: ✓

CSA stripping length: 10mm

CSA torque, max.: 1.6Nm

CSA torque, min.: 0.8Nm

CSA wire cross-section AWG, max.: 8

CSA wire cross-section AWG, min.: 22

### **CSAus approval**

CSAus Usegroup C: rated current: 10A

CSAus Usegroup C: rated voltage: 600V

CSAus approval: UL 1059

CSAus approval granted: ✓

---

CSAus stripping length: 10mm

CSAus torque, max.: 1.6Nm

CSAus torque, min.: 0.8Nm

CSAus wire cross-section AWG, max.: 8

CSAus wire cross-section AWG, min.: 22

## Environment

---

### Environmental Product Compliance

---

EU-POP Conform: Yes

PROP 65 Conform: Yes

REACH Candidate Substance Note: No

REACH Conform: Yes

REACH Reference date: 2025-06-25

RoHS Conform: Yes

TSCA Conform: Yes

## Accessories

---

### Measurement pick-off terminal

---



**SMAG 6/4 BG**  
[17121.2](#)

### End plate

---



**SAP SSIK 4/6 BK**  
[17258.4](#)

### End stop

---

**SES 35 GN**  
[17250.1](#)

---

## Insulation cap for cross-connector

---

**SQIK 2,5-10 BK**

17200.4

---

## Insulated cross-connector

---

**SQI 6/7 BK**

17226.4

---

**SQI 6/8 BK**

17227.4

---

**SQI 6/4 BK**

17223.4

---

**SQI 6/9 BK**

17228.4

---

**SQI 6/10 BK**

17229.4

---



**SQI 6/2 BK**

17221.4

---

**SQI 6/3 BK**

17222.4

---

**SQI 6/6 BK**

17225.4

---

**SQI 6/30 BK**

17230.4

---


**SQI 6/5 BK**

17224.4

---

## Quick marking

---



**PMC SB 8/40 WH**

9323.7

---

## Screwdriver

---



**SDB 0,8x4,0**

1087.0

---

## Connecting piece

---



**VBS 3/10/Z OG**

2876.3

---



**VBS 2/10/Z OG**

2875.3

---