# Datasheet

## 3725.8
## ZQI 4/7 YE
## ZQI 4/7 YE

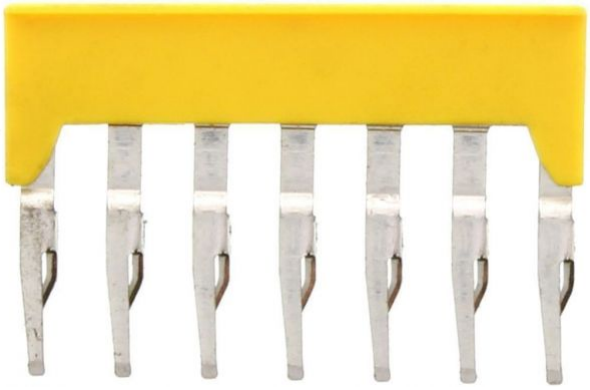

Insulated cross-connector, No. of poles: 7, Mounting type: Plug in, Width: 40.6 mm, Rated cross-section: 4 mm², Colour: Yellow

### Business data

| | |
|---|---|
| Product description | Insulated cross-connector |
| Packaging unit | 20 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 5 |
| Weight per piece (including packaging) | 5.1 |
| Unit of weight | G |
| Customs number | 85389099 |
| Country of origin | DE |

# Datasheet

## 3725.8
## ZQI 4/7 YE
## ZQI 4/7 YE

### Technical Data

| Dimensions | |
|---|---|
| Length | 4.5 mm |
| Width | 40.6 mm |
| Pitch size | 6 mm |

| Ratings | |
|---|---|
| Voltage with partition, max. | 800 V |
| Voltage without partition, max. | 800 V |
| Rated current | 32 A |
| Rated cross-section | 4 mm² |
| Contamination degree | 3 |

| Connection data | |
|---|---|
| No. of poles | 7 |

# Datasheet

## 3725.8
## ZQI 4/7 YE
## ZQI 4/7 YE

### Technical Data

#### Materials

| | |
|---|---|
| Material | Copper alloy |
| Surface | Tin-plated |
| Insulation housing | Polyamide 6.6 |
| Flammability class UL 94 | V-2 |
| Working temperature, min. | -40 °C |
| Working temperature, max. | 105 °C |

#### Further technical data

| | |
|---|---|
| Mounting type | Plug in |
| Insulation available | ✓ |
| Touch protection is available | ✓ |
| Number of bridged terminals | 7 |