



5710.2
LPM 7-A
LPM 7-A

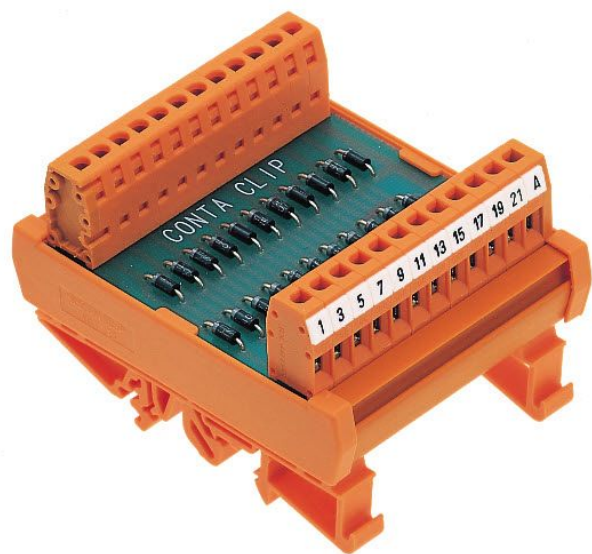

Lamp test module, With 7 channels, Common cathode with common collection point, Diode type 1N 4007, Screw connection, Mounting type: Mounting rail TS 35

Business data

Product description	Lamp test module
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	78
Weight per piece (including packaging)	106.5
Unit of weight	G
Customs number	85411000
Country of origin	EEC

5710.2 LPM 7-A LPM 7-A

Technical Data

Dimensions

Length	87 mm
Width	49 mm
Height TS 35/7.5	57 mm

Ratings

Overvoltage category	III
Contamination degree	2

Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	2.5 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	7 mm
Torque	0.6 Nm

Input data

Max. operating voltage AC/DC	250 V
Current load per channel, max.	1 A
Number of channels	7
Shared anode	✓

Materials

Working temperature, min.	-20 °C
Working temperature, max.	50 °C

5710.2
LPM 7-A
LPM 7-A

Approvals

Standards and regulations

Standards / specifications	DIN VDE 0110 / EN 50178
----------------------------	-------------------------

5710.2

LPM 7-A

LPM 7-A

Media

