
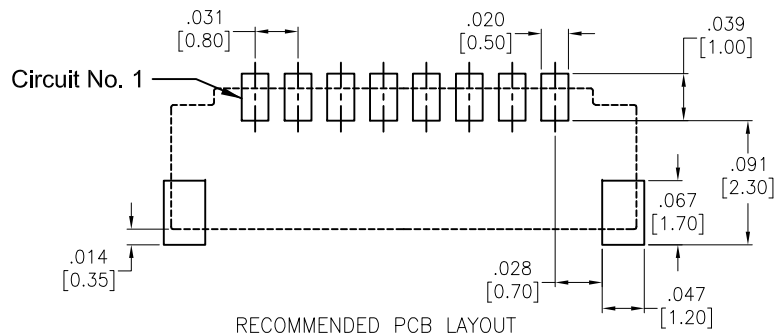
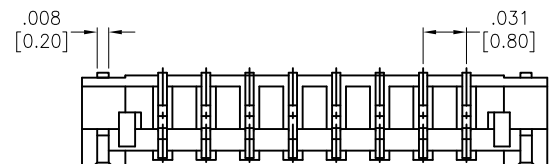
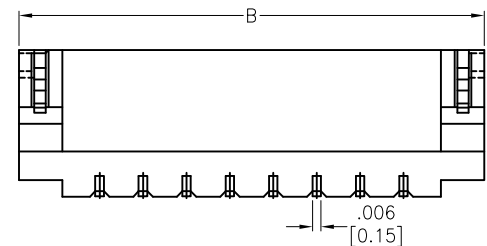



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/13/17	

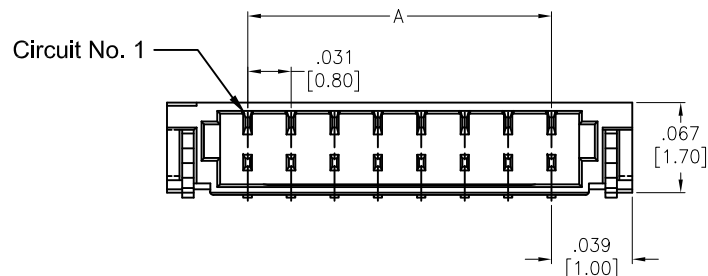

SPECIFICATIONS:

Material:
 Insulator: Polyamide, rated UL 94V-0
 Insulator color: Natural
 Contacts: Copper Alloy
 Solder Tab: Brass, Tin plated
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Voltage rating: 250V AC/DC
 Current rating: 0.5A AC/DC (32 Awg wire)
 0.2A AC/DC (36 Awg wire)
 Contact resistance: 20 mohms max
 Insulation resistance: 100MΩ min
 Dielectric withstanding voltage: 200V AC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 02 thru 17, 20, 22
 A = .031 [0.80] x No. of Spaces
 B = .031 [0.80] x No. of Spaces + .118 [3.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES .X ± .10 .XX ± .020 .XXX ± .015		HOLES Ø.X ± .10 Ø.XX ± .015 Ø.XXX ± .010		TITLE .031 [0.80] PITCH HEADER, SIDE ENTRY TYPE, .069 [1.75] HEIGHT	
APPROVALS DRAWN AY CHECKED MY APPROVED		DATE 11/13/17 11/13/17		SIZE X PART NO. 08SH-A-XX-GR-SMT-T/R REF: S00015T	
				SCALE: NTS SHEET 1 OF 1	