
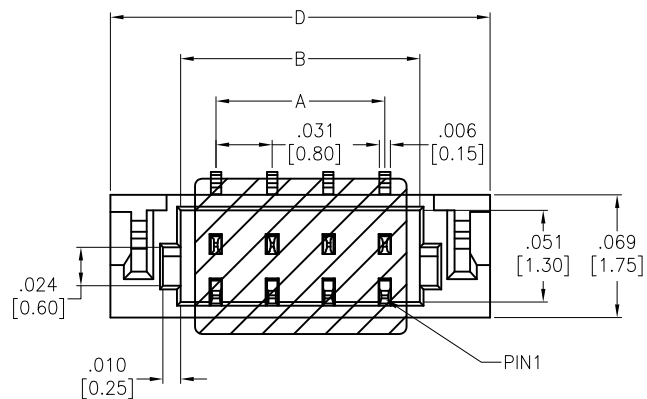
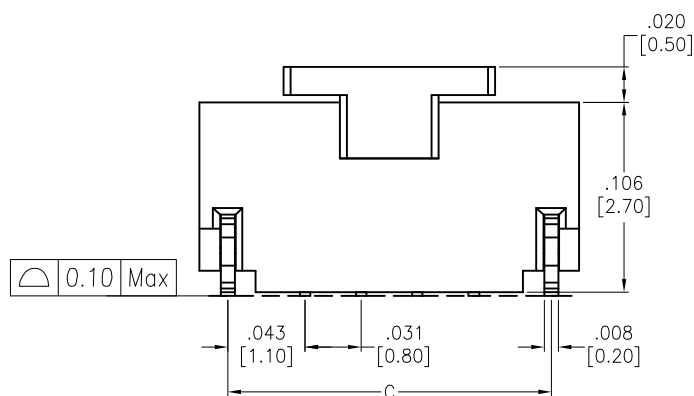




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/26/15	
A		UPDATE CAP	1/31/19	AY/SL

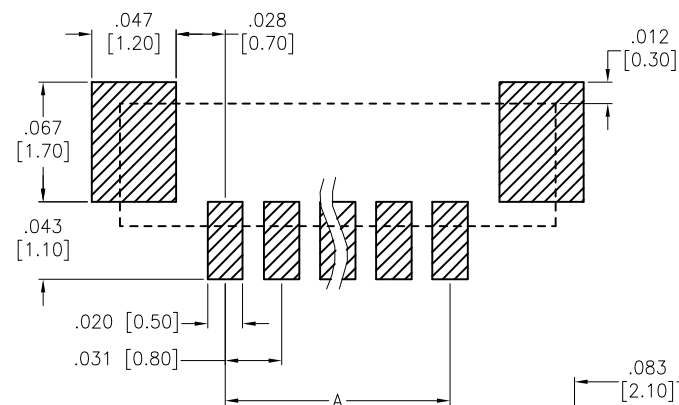

RECOMMENDED PCB LAYOUT

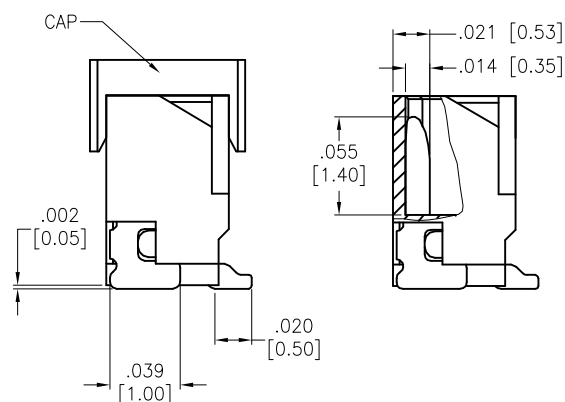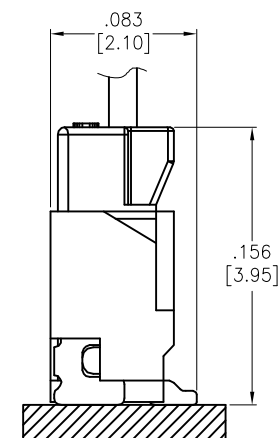

TOP ENTRY TYPE

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Natural

Contacts: Copper Alloy

Mounting Ear: Copper Alloy, Tin plated

Plating:

Gold flash over Nickel underplate overall

Electrical:

Voltage rating: 50V AC/DC

Current rating: 0.7A AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 100MΩ min

Dielectric withstanding voltage: 200V AC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 02 thru 22

A = .031 [0.80] x No. of Spaces

B = .031 [0.80] x No. of Spaces + .039 [1.00]

C = .031 [0.80] x No. of Spaces + .087 [2.20]

D = .031 [0.80] x No. of Spaces + .118 [3.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	HR	1/26/15
CHECKED	NC	1/26/15
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.031 [0.80] PITCH HEADER, STRAIGHT TYPE

SIZE X	PART NO. 08SH-A1-XX-GS-SMT-PP-T/R	REV. A
REF: S00124T	SCALE: NTS	SHEET 1 OF 1